



The bridge to possible

[Data sheet](#)
Cisco public

Cisco Secure Firewall ASA Virtual (ASA v)

Contents

| | |
|--------------------------|----|
| Product overview | 3 |
| Benefits | 4 |
| Smart Software Licensing | 4 |
| Cisco Capital | 13 |

Today, organizations rely on a mixture of physical and virtual control points to meet their network security needs. They need the flexibility to deploy different physical and virtual firewalls across a wide range of environments while still maintaining consistent policy across branch offices, corporate data centers, and all points between. From data center consolidation to office relocations, mergers and acquisitions, as well as seasonal peaks in demand on your applications, Cisco’s virtual firewall portfolio helps businesses simplify security management with the convenience of unified policy and the flexibility to deploy everywhere.

Cisco® Secure Firewall ASA Virtual (formerly ASA_v) gives you the flexibility to choose the performance you need for your organization. Secure Firewall ASA Virtual is the virtualized option of our popular Secure Firewall ASA solution and offers security in traditional physical data centers and private and public clouds. Its scalable VPN capability provides secure access to your organization’s resources—and protects workloads against increasingly complex threats with world-class security controls.

Product overview

Secure Firewall ASA Virtual is a firewall with powerful VPN capabilities. It supports site-to-site VPN, remote-access VPN, and clientless VPN functionalities. Consistent policy simplifies management across your virtual and physical Secure Firewall ASA solutions. Cisco Smart Software Licensing makes it easy to deploy, manage, and track virtual instances of the appliance running in your private cloud or in a public cloud.

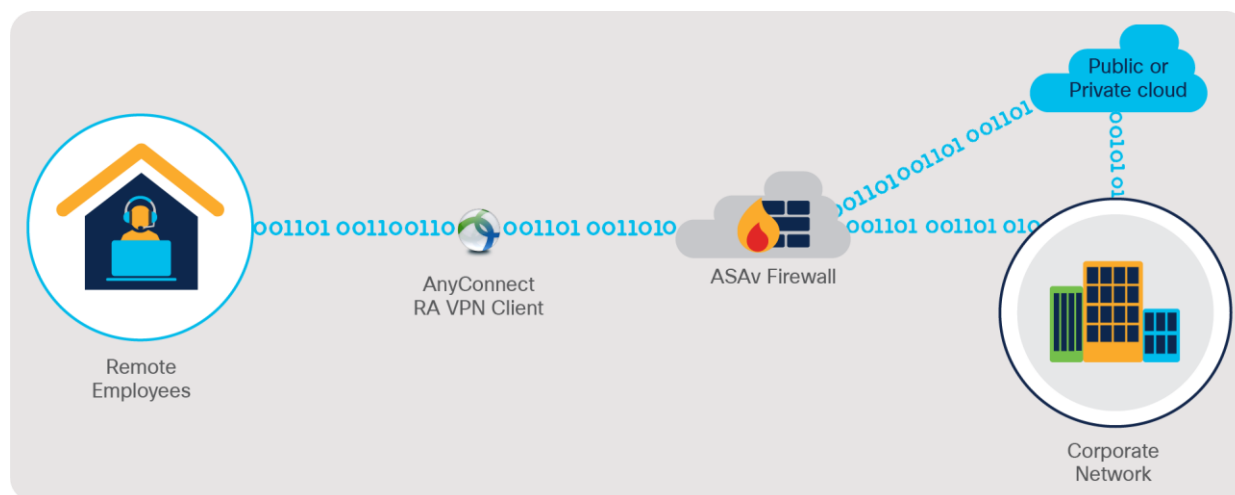


Figure 1. Cisco® Secure Firewall ASA Virtual (formerly ASA_v) overview

Benefits

VPN head-end

Cisco AnyConnect® client empowers employees to work from home (or anywhere) on any device at any time, securely. Give any user highly secure access to your enterprise network and provide visibility and control to your IT and security teams to identify who and which devices are accessing the infrastructure. Alleviate strain on your IT and security teams as they support offsite workers and personal devices. Secure Firewall ASA Virtual supports site-to-site VPN for connecting your data centers.

License portability across clouds

Deploy Secure Firewall ASA Virtual everywhere—from your data center to your branch office, to a public cloud—with the portability of one license across public or private clouds (VMware, KVM and Hyper-V, OpenStack, Amazon Web Services (AWS), Microsoft Azure, Google Cloud Platform (GCP), Oracle Cloud Infrastructure (OCI) and government clouds). Expand, contract, and relocate workloads over time spanning private and public cloud infrastructures with one license.

Low-touch deployment

Rapidly deploy additional Secure Firewall ASA Virtual appliances to support unplanned or seasonal surges on your applications or VPN. Add more bandwidth or protection for remote offices by spinning up a new virtual machine. Choose from higher-performance model options if you need more protection.

Smart Software Licensing

Cisco Smart Software Licensing makes it easier to buy, deploy, track, and renew Cisco licenses. You will enjoy:

- Simpler purchase and activation of the virtual appliance
- Easier license management and reporting of virtual appliances due to license pooling
- Automatic license activation when the virtual appliance is provisioned

Customers, select partners, and Cisco can view product entitlements and services in the Cisco Smart Software Manager. Configuration and activation are done with a single token. Secure Firewall ASA Virtual will self-register with a Cisco server in the cloud, eliminating the need to register products with Product Activation Keys (PAKs). Instead of using PAKs or license files, Smart Software Licensing establishes a pool of software licenses or entitlements that can be used across your organization. When a virtual appliance is instantiated on a customer's premises, an entitlement is subtracted from the pool. When a virtual appliance is decommissioned, or when it is deinstantiated within the Smart Software Manager, an entitlement is added to the pool.

With the Smart Software Manager, you can manage license deployments throughout your organization easily and quickly. You can also manage multiple products from Cisco that support Smart Software Licensing.

Secure Firewall ASA Virtual uses Smart Software Licensing exclusively. Older forms of licensing are not supported.

Any Secure Firewall ASA Virtual license can be used on any supported ASA vCPU/memory configuration. This allows customers to run on a wide variety of VM resource footprints. This also increases the number of supported AWS, Azure, GCP and OCI instance types. When configuring the Secure Firewall ASA Virtual VM, the maximum supported number of vCPUs is 16 and the maximum supported memory is 128GB RAM.

Table 1. Specifications for 9.16 and later- ESXi/KVM/OpenStack

| Feature | Entitlement support: Standard tier | | | | |
|---|------------------------------------|-------------|-------------|--------------|---------------|
| | 100M (ASAv5) | 1G (ASAv10) | 2G (ASAv30) | 10G (ASAv50) | 20G (ASAv100) |
| Stateful inspection throughput (maximum) ¹ | 100 Mbps | 1 Gbps | 2 Gbps | 10 Gbps | 20 Gbps |
| Stateful inspection throughput (multiprotocol) ² | 100 Mbps | 1 Gbps | 2 Gbps | 10 Gbps | 20 Gbps |
| IPsec VPN throughput (AES 450B UDP test) ³ | 100 Mbps | 750 Mbps | 2 Gbps | 4 Gbps | 8 Gbps |
| Connections per second | 12500 | 60000 | 200,000 | 350000 | 600,000 |
| Concurrent sessions | 50,000 | 100,000 | 500,000 | 2,000,000 | 4,000,000 |
| VLANs | 25 | 50 | 200 | 1024 | 1024 |
| Bridge groups | 12 | 25 | 100 | 250 | 250 |
| IPsec VPN peers | 50 | 250 | 750 | 10,000 | 20,000 |
| Cisco AnyConnect or clientless VPN user sessions | 50 | 250 | 750 | 10,000 | 20,000 |
| Virtual CPU core allocation ⁴ | 1 | 1 | 4 | 8 | 16 |
| Memory allocation ⁴ | 2GB | 2GB | 8GB | 16GB | 32GB |
| Disk storage ⁵ | 8GB | 8GB | 8GB | 8GB | 8GB |

Note: This data is from testing on the Cisco Unified Computing System™ (Cisco UCS®) C series M5 server with the Intel® Xeon® Gold 6254 processors running SR-IOV on Intel X520/X710. Stated virtual CPU core allocation assumes dedicated physical cores with Hyper Threading disabled. Each performance number above was obtained while running only the associated test.

¹ Throughput measured with 1500B User Datagram Protocol (UDP) traffic measured under ideal test conditions.

² “Multiprotocol” refers to a traffic profile consisting primarily of TCP-based protocols or applications like HTTP, SMTP, FTP, IMAPv4, BitTorrent, and DNS.

³ The VPN throughput and the number of sessions depend on the ASA device configuration and VPN traffic patterns. These elements should be taken into consideration as part of your capacity planning.

⁴ Stated resource allocation is required to achieve the documented performance metrics for each tier. Decreased allocations are supported but will result in lower performance.

⁵ Thin provisioning is supported.

Table 2. Specifications for 9.16 and later- AWS

| AWS Performance | | | | | |
|---|--------------|-------------|-------------|--------------|---------------|
| License Type | 100M (ASAv5) | 1G (ASAv10) | 2G (ASAv30) | 10G (ASAv50) | 20G (ASAv100) |
| AWS Instance Type | c5.large | c5.large | c5.xlarge | c5.2xlarge | c5n.4xlarge |
| Stateful inspection throughput (maximum) ⁶ | 100 Mbps | 1 Gbps | 2 Gbps | 10 Gbps | 16 Gbps |
| Stateful inspection throughput (multiprotocol) ⁷ | 100 Mbps | 1 Gbps | 2 Gbps | 4.5 Gbps | 8 Gbps |
| IPsec VPN throughput (AES 450B UDP test) ⁸ | 100 Mbps | 1 Gbps | 2 Gbps | 3.5 Gbps | 5.5 Gbps |
| Connections per second | 12,500 | 62,000 | 90,000 | 120,000 | 200,000 |
| Concurrent sessions | 50,000 | 100,000 | 500,000 | 2,000,000 | 4,000,000 |
| IPsec VPN peers | 50 | 250 | 750 | 10,000 | 20,000 |
| Cisco AnyConnect or clientless VPN user sessions | 50 | 250 | 750 | 10,000 | 20,000 |

Table 3. Specifications for 9.16 and later- Azure

| Azure Performance* | | | | | |
|---|--------------|-------------|-------------|--------------|---------------|
| License Type | 100M (ASAv5) | 1G (ASAv10) | 2G (ASAv30) | 10G (ASAv50) | 20G (ASAv100) |
| Azure VM Type | D3_v2 | D3_v2 | D3_v2 | D4_v2 | D5_v2 |
| Stateful inspection throughput (maximum) ⁶ | 100 Mbps | 1 Gbps | 2 Gbps | 5.5 Gbps | 11 Gbps |
| Stateful inspection throughput (multiprotocol) ⁷ | 100 Mbps | 1 Gbps | 1 Gbps | 1.5 Gbps | 2.5 Gbps |
| IPsec VPN throughput (AES 450B UDP test) ⁸ | 100 Mbps | 1 Gbps | 1.75 Gbps | 3.5 Gbps | 6.5 Gbps |
| Connections per second | 10,000 | 10,000 | 10,000 | 10,000 | 10,000 |
| Concurrent sessions | 50,000 | 100,000 | 500,000 | 2,000,000 | 4,000,000 |
| IPsec VPN peers | 50 | 250 | 750 | 10,000 | 20,000 |
| Cisco AnyConnect or clientless VPN user sessions | 50 | 250 | 750 | 10,000 | 20,000 |

* - Measured on instances with Accelerated Networking(AN) enabled.

Table 4. Specifications for 9.16 and later- GCP

| GCP Performance | | | | | |
|---|---------------|---------------|---------------|---------------|----------------|
| License Type | 100M (ASAv5) | 1G (ASAv10) | 2G (ASAv30) | 10G (ASAv50) | 20G (ASAv100) |
| GCP Machine Type | c2-standard-4 | c2-standard-4 | c2-standard-4 | c2-standard-8 | c2-standard-16 |
| Stateful inspection throughput (maximum) ⁶ | 100 Mbps | 1 Gbps | 2 Gbps | 7.6 Gbps | 16 Gbps |
| Stateful inspection throughput (multiprotocol) ⁷ | 100 Mbps | 1 Gbps | 2 Gbps | 7.2 Gbps | 12 Gbps |
| IPsec VPN throughput (AES 450B UDP test) ⁸ | 100 Mbps | 1 Gbps | 2 Gbps | 3.3 Gbps | 7.2 Gbps |
| Connections per second | 12,500 | 48,000 | 60,000 | 82,000 | 160,000 |
| Concurrent sessions | 50,000 | 100,000 | 500,000 | 2,000,000 | 4,000,000 |
| IPsec VPN peers | 50 | 250 | 750 | 10,000 | 20,000 |
| Cisco AnyConnect or clientless VPN user sessions | 50 | 250 | 750 | 10,000 | 20,000 |

Table 5. Specifications for 9.16 and later- OCI

| OCI Performance | | | | | |
|---|----------------|----------------|----------------|----------------|----------------|
| License Type | 100M (ASAv5) | 1G (ASAv10) | 2G (ASAv30) | 10G (ASAv50) | 20G (ASAv100) |
| OCI Shape Type | VM.Standard2.4 | VM.Standard2.4 | VM.Standard2.4 | VM.Standard2.8 | VM.Standard2.8 |
| Stateful inspection throughput (maximum) ⁶ | 100 Mbps | 1 Gbps | 2 Gbps | Coming soon | Coming soon |
| Stateful inspection throughput (multiprotocol) ⁷ | 100 Mbps | 1 Gbps | 2 Gbps | 2.3 Gbps | 3 Gbps |
| IPsec VPN throughput (AES 450B UDP test) ⁸ | 100 Mbps | 550 Mbps | 550 Mbps | 550 Mbps | 620 Mbps |

⁶ Throughput measured with 1500B User Datagram Protocol (UDP) traffic measured under ideal test conditions.

⁷ “Multiprotocol” refers to a traffic profile consisting primarily of TCP-based protocols or applications like HTTP, SMTP, FTP, IMAPv4, BitTorrent, and DNS.

⁸ The VPN throughput and the number of sessions depend on the ASA device configuration and VPN traffic patterns. These elements should be taken into consideration as part of your capacity planning.

| OCI Performance | | | | | |
|--|----------------|----------------|----------------|----------------|----------------|
| License Type | 100M (ASAv5) | 1G (ASAv10) | 2G (ASAv30) | 10G (ASAv50) | 20G (ASAv100) |
| OCI Shape Type | VM.Standard2.4 | VM.Standard2.4 | VM.Standard2.4 | VM.Standard2.8 | VM.Standard2.8 |
| Connections per second | 12,500 | 26,600 | 26,600 | 26,600 | 38,200 |
| Concurrent sessions | 50,000 | 100,000 | 500,000 | 2,000,000 | 4,000,000 |
| Ipssec VPN peers | 50 | 250 | 750 | 10,000 | 20,000 |
| Cisco AnyConnect or clientless VPN user sessions | 50 | 250 | 750 | 10,000 | 20,000 |

Table 6. Secure Firewall ASA Virtual models and recommended public cloud instance types

| Standard tier | 100M (ASAv5) | 1G (ASAv10)* | 2G (ASAv30)* | 10G (ASAv50)* | 20G (ASAv100)* | Comments |
|--|--|--|--|--|--|---|
| Recommended AWS instance types | c5.large c4.large c3.large m4.large | c5.large c4.large c3.large m4.large | c5.xlarge c3.xlarge m4.xlarge c4.xlarge | c5.2xlarge c4.2xlarge c3.2xlarge m4.2xlarge | c5.4xlarge c5n.4xlarge | Smallest supported instance type is large , which supports maximum throughput/limits of 1G entitlement. Auto Scale is supported |
| Recommended Azure VM types | F4, F4s D3, D3_v2, DS3, DS3_v2 | F4, F4s D3, D3_v2, DS3, DS3_v2 | F4, F4s D3, D3_v2, DS3, DS3_v2 | F8, F8s D8_v3 D4, D4_v2, DS4, DS4_v2 | F16, F16s D5, D5_v2, D16_v3, DS5, DS5_v2 (Version 9.15 and above only) | Smallest supported instance size is F4/F4s , and supports max throughput/limits of 2G entitlement. Auto Scale is supported. Accelerated Networking is supported. |
| Recommended GCP machine types (Version 9.15 and above only) | c2-standard-4 | c2-standard-4 | c2-standard-4 | c2-standard-8 | c2-standard-16 | Smallest supported instance size is c2-standard-4 , and supports max throughput/limits of 2G entitlement |

| Standard tier | 100M (ASAv5) | 1G (ASAv10)* | 2G (ASAv30)* | 10G (ASAv50)* | 20G (ASAv100)* | Comments |
|--|----------------|----------------|----------------|----------------|----------------|--|
| Recommended OCI shape types (Version 9.15 and above only) | VM.Standard2.4 | VM.Standard2.4 | VM.Standard2.4 | VM.Standard2.8 | VM.Standard2.8 | Smallest supported instance size is VM.standard2.4 , and supports max throughput/limits of 2G entitlement |

* The recommended instances for higher entitlement can be used for lower entitlement as well.

Table 7. Hypervisor and public cloud constraints

| Feature | Vmware | KVM | Hyper-V | AWS | Azure | GCP | OCI |
|---------------------------|-------------------------|-----|------------------------------|---|--|--|--|
| Hypervisor support | ESXi 6.0, 6.5, 6.7, 7.0 | Yes | Yes (Windows Server 2012-R2) | AWS, AWS Gov Marketplace, AWS China (see VM instances supported in Table 9) | Azure, Azure Gov Marketplace, Azure China (see VM instances supported in Table 10) | GCP (see VM instances supported in Table 11) | OCI (see VM instances supported in Table 12) |
| High availability | Stateful active/standby | | | No | Stateless active/standby | No | No |
| Modes | Routed and transparent | | | Routed only | Routed only | Routed only | Routed only |

Table 8. Maximum Cisco AnyConnect user sessions

| RAM (GB) | | Entitlement support | | | | |
|----------|--------|---------------------|--------------|--------------|---------------|----------------|
| MIN | MAX | 100M (ASAv5) | 1G (ASAv10)* | 2G (ASAv30)* | 10G (ASAv50)* | 20G (ASAv100)* |
| 2 | <8 | 50 | 250 | 250 | 250 | 250 |
| 8 | <16 | 50 | 250 | 750 | 750 | 750 |
| 16 | <32 | 50 | 250 | 750 | 10K | 10K |
| 32 | No max | 50 | 250 | 750 | 10K | 20K |

Table 9. AWS instance support

| Instance | Attributes | |
|----------------------|------------|-------------|
| | vCPUs | Memory (GB) |
| C5.large* | 2 | 4 |
| C5.xlarge* | 4 | 8 |
| C5.2xlarge* | 8 | 16 |
| C5.4xlarge** | 16 | 32 |
| C5n.large** | 2 | 5.25 |
| C5n.xlarge** | 4 | 10.5 |
| C5n.2xlarge** | 8 | 21 |
| C5n.4xlarge** | 16 | 42 |
| C4.large | 2 | 3.75 |
| C4.xlarge | 4 | 7.5 |
| C4.2xlarge* | 8 | 15 |
| C3.large | 2 | 3.75 |
| C3.xlarge | 4 | 7.5 |
| C3.2xlarge* | 8 | 15 |
| m4.large | 2 | 8 |
| m4.xlarge | 4 | 16 |
| m4.2xlarge* | 8 | 32 |

* Requires 9.13 and later.

** Requires 9.14.1.10 and later

Table 10. Azure instance support

| Instance | Attributes | |
|----------------------------|------------|-------------|
| | vCPUs | Memory (GB) |
| D3, D3_v2, DS3*, DS3_v2* | 4 | 14 |
| D4*, D4_v2*, DS4*, DS4_v2* | 8 | 28 |
| D5, DS5, D5_v2, DS5_v2** | 16 | 56 |
| D8_v3* | 8 | 32 |
| D16_v3** | 16 | 64 |
| F4*, F4s* | 4 | 8 |
| F8*, F8s* | 8 | 16 |
| F16, F16s** | 16 | 32 |

* Requires 9.13 and later.

** Requires 9.15 and later

Table 11. GCP instance support*

| Instance | Attributes | |
|----------------------------------|------------|-------------|
| | OCPU's | Memory (GB) |
| n1-standard-4 | 4 | 15 |
| c2-standard-4 n2-standard-4 | 4 | 16 |
| n2-highmem-4 | 4 | 32 |
| c2-standard-8 n2-standard-8 | 8 | 32 |
| n1-standard-8 | 8 | 30 |
| n1-highcpu-8 | 8 | 7.2 |
| n2-highcpu-8 | 8 | 8 |
| n2-highmem-8 | 8 | 64 |
| c2-standard-16 n2-standard-16 | 16 | 64 |
| n1-standard-16 | 16 | 60 |

| Instance | Attributes | |
|---------------|------------|-------------|
| | OCPU's | Memory (GB) |
| n1-highcpu-16 | 16 | 14.4 |
| n2-highcpu-16 | 16 | 16 |
| n2-highmem-16 | 16 | 128 |

* Requires 9.15 and later

Table 12. OCI instance support*

| Instance | Attributes | |
|----------------|------------|-------------|
| | vCPUs | Memory (GB) |
| VM.Standard2.4 | 4 | 60 |
| VM.Standard2.8 | 8 | 120 |

* Requires 9.15 and later

Table 13. Ordering information: In Cisco Commerce Workspace (CCW) order the base selection (denoted by “K9” in the part number), followed by the desired license type

| Part number | Description |
|------------------|---|
| L-ASAV5S-K9= | Cisco 100 Mbps entitlement (ASAv5) selection(Perpetual License) |
| L-ASA-V-5S-K9= | Cisco 100 Mbps entitlement (ASAv5) subscription |
| L-ASAV10S-K9= | Cisco 1 Gbps entitlement (ASAv10) selection(Perpetual License) |
| L-ASA-V-10S-K9= | Cisco 1 Gbps entitlement (ASAv10) subscription |
| L-ASAV30S-K9= | Cisco 2 Gbps entitlement (ASAv30) selection(Perpetual License) |
| L-ASA-V-30S-K9= | Cisco 2 Gbps entitlement (ASAv30) subscription |
| L-ASAV50S-K9= | Cisco 10 Gbps entitlement (ASAv50) selection(Perpetual License) |
| L-ASA-V-50S-K9= | Cisco 10 Gbps entitlement (ASAv50) subscription |
| L-ASA-V-100S-K9= | Cisco 20 Gbps entitlement (ASAv100) subscription* |

*No Perpetual license option for ASAv100

Cisco Capital

Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more.](#)

Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)