

# Configure and Verify EVPN/VxLAN in Multisite Environment

## Contents

- [Introduction](#)
- [Prerequisites](#)
- [Requirements](#)
- [Components Used](#)
- [Related Products](#)
- [Background Information](#)
- [How is Multi-Site Helpful](#)
- [Other Benefits](#)
- [Supported Topologies](#)
- [Topology](#)
- [Configure](#)
- [Verify](#)
- [Troubleshoot](#)
- [Related Information](#)

## Introduction

This document describes how to configure and verify Ethernet VPN/ Virtual Extensible LAN Multisite Environment with Cisco Nexus 9000 series switches.

## Prerequisites

### Requirements

Cisco recommends that you have knowledge of these topics:

- Multiprotocol Label Switching (MPLS) Layer 3 VPN
- Multiprotocol- Border Gateway Protocol (MP-BGP)
- Ethernet VPN (EVPN)

### Components Used

The information in this document is based on these software and hardware versions:

leaf1#	N5K-C5672UP-16G-SUP	system: version 7.3(0)N1(1)
leaf2#	N9K-C92160YC-X	NXOS: version 9.2(3)
spine1#	N9K-C9396PX	NXOS: version 9.2(3)
spine2#	N9K-C9396PX	NXOS: version 9.2(3)
MultisiteBG1#	N9K-C93108TC-EX	NXOS: version 9.2(3)
MultisiteBG2#	N9K-C93108TC-FX	NXOS: version 9.3(1)
multisitespine2#	N9K-C9372TX-E	NXOS: version 9.2(3)
Multistespine1#	N9K-C92160YC-X	NXOS: version 9.2(3)

MultisteLeaf1#	N9K-C93108TC-EX	NXOS: version 7.0(3)I7(5)
----------------	-----------------	---------------------------

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, ensure that you understand the potential impact of any command.

## Related Products

Minimum software and hardware requirements EVPN Multi-Site border gateway.

Item	Requirement
Cisco Nexus hardware	â—• Cisco Nexus 9300 EX platform
	â—• Cisco Nexus 9300 FX platform
	â—• Cisco Nexus 9332C platform
	â—• Cisco Nexus 9364C platform
	â—• Cisco Nexus 9500 platform with X9700-EX line card
	â—• Cisco Nexus 9500 platform with X9700-FX line card
Cisco NX-OS Software	Cisco NX-OS Software Release 7.0(3)I7(1) or later

The hardware and software requirements for the Site-Internal nodes of a Virtual Extensible LAN (VXLAN) BGP EVPN site remain the same as those without the EVPN Multi-Site BGW

## Background Information

The data center is a resource pool that contains - computational power, storage, and necessary applications to support any business environment. Proper planning of the data center infrastructure design is vital. Now see what are the critical requirements and how they overcome. Modern IT infrastructure and data center deployments are in need of HA, ability to scale at a faster rate, high performance, and always ON.

A few explored vital requirements in DC Design/Architecture space:

- Port Density, is improved by FEX.
- Compute Capacity is improved by Hardware Virtualization (UCS).
- Access layer uplink bandwidth is improved by FI, Port-Channel.
- Chassis-Level Redundancy is improved by vPC.
- SDN fabric is improved by ACI - automating underlay and overlay in a fabric.
- Rapid deployment and supporting new services are improved by DCNM.
- The bandwidth requirement for long haul applications is improved by dark fiber or wavelength service.
- Over all geographical redundancy and scaling are key attributes for throbbing/scaling out data center environment, Multi-Site VxLAN/EVPN helps us to have better DCI solutions.

## How is Multi-Site Helpful

External connectivity includes the connection of the data center to the rest of the network: to the Internet, the WAN, or the campus. All options provided for external connectivity are multitenant aware and focus on Layer 3 transport to the external network domains.

- EVPN is a next-generation all-in-one VPN solution.
- It not only does the job of many other VPN technologies but is better too.
- Integration with Legacy Networks.
- Selective Advertisement/Extension:
  - Extend the only L2 - Specific VLANs/Subnets that can be extended using Type-2 routes.
  - Extend the only L3 - Specific L3 domains can be extended using Type-5 routes.
- Auto-discovery of redundancy group using Type-4 routes.
- Aliasing, Mass Withdraw of addresses, SH/AA MH Indication using Type-1 routes.
- Auto-discovery of multicast tunnel endpoints and MCAST tunnel type using Type-3 routes.

## Other Benefits

• Workload Balancing across data centers and clouds.

• Proactive response to disruptions – mitigates risks of Approaching disasters, viz. hurricanes, floods, and so on.


• Data center maintenance and migrations - Planned events scheduled over a period of time, Integration with Legacy Networks.

• Backup and Disaster RecoveryaaS.

## Supported Topologies

- BGW-to-Cloud model
- BGWs between Spine and Super-Spine model
- BGWs on Spine model
- BGWs Back-to-Back model

## Topology

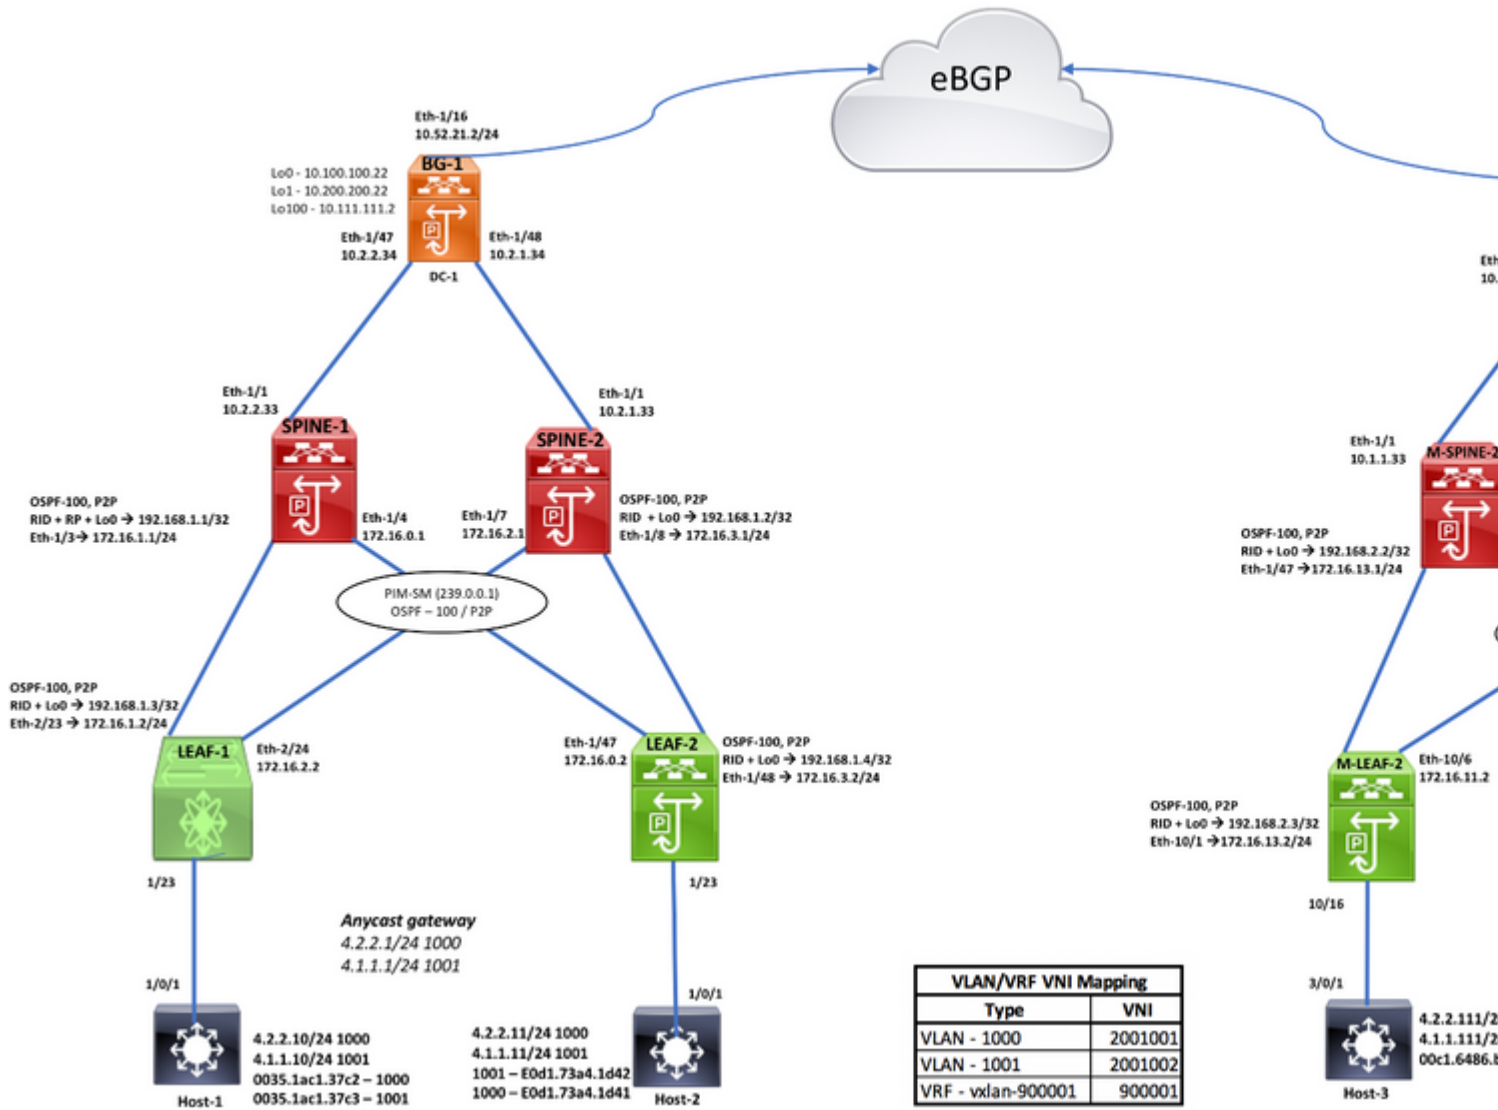

## Configure

**DC-1, LEAF-1 CONFIGURATION**

Enable Features	VLAN-VNI Mapping	VTEP Config	LEAF to SPINE interfaces/OSPF Config
install feature-set fabric	vlan 1	interface nve1	interface Ethernet2/23
feature-set fabric	vlan 101	no shutdown	no switchport
hostname leaf1	vn-segment 900001	source-interface loopback0	ip address 172.16.1.2/24
feature fabric forwarding	vlan 1000	host-reachability protocol bgp	ip ospf network point-to-point
nv overlay evpn	vn-segment 2001002	member vni 900001 associate-vrf	ip router ospf 100 area 0.0.0.0
feature ospf	vlan 1001	member vni 2001001	ip pim sparse-mode
feature bgp	vn-segment 2001001	suppress-arp	
feature pim		mcast-group 239.0.0.1	interface Ethernet2/24
feature interface-vlan	<b>VLAN Config</b>	member vni 2001002	no switchport
feature fabric access	interface Vlan101	suppress-arp	ip address 172.16.2.2/24
feature nv overlay	no shutdown	mcast-group 239.0.0.1	ip ospf network point-to-point
feature vn-segment-vlan-based	vrf member vxlan-900001		ip router ospf 100 area 0.0.0.0
	ip forward		ip pim sparse-mode
	interface Vlan1000		interface loopback0
<b>Enabling Store-and-Forward Switching</b>	no shutdown		ip address 192.168.1.3/24
switching-mode store-forward	mtu 9216		ip router ospf 100 area 0.0.0.0
	vrf member vxlan-900001		ip pim sparse-mode
	ip address 4.2.2.1/24		
<b>Interface towards HOST</b>	ipv6 address 4::2:0::1/64		
interface Ethernet1/23	fabric forwarding mode anycast-gateway		router ospf 100
switchport mode trunk			router-id 192.168.1.3
switchport trunk allowed vlan 1000-1001	interface Vlan1001		
speed 1000	no shutdown		
	mtu 9216		
	vrf member vxlan-900001		
	ip address 4.1.1.1/24		
	ipv6 address 4::1:0::1/64		
	fabric forwarding mode anycast-gateway		
	<b>Anycast GW mapping</b>		
	fabric forwarding anycast-gateway-mac 0000.2222.3333		
	<b>Static RP Config</b>		
	ip pim rp-address 192.168.1.1 group-list 224.0.0.0/4		
	ip pim rp-address 192.168.1.2 group-list 224.0.0.0/4		
	ip pim ssm range 232.0.0.0/8		
	ip multicast multipath none		

**DC-1 SPINE -1 Configuration**

Enabling Features, RP Config	OSPF Configuration	BGP/EVPN Configuration
hostname spine1	interface Ethernet1/1	router bgp 200
boot raos bootflash/raos.9.2.3.bin	no switchport	router-id 192.168.1.1
	ip address 10.2.2.33/30	address-family ipv4 unicast
nv overlay evpn	ip ospf network point-to-point	address-family l2vpn evpn
feature ospf	ip router ospf 100 area 0.0.0.0	neighbor 10.100.100.22
feature bgp	ip pim sparse-mode	remote-as 200
feature pim	no shutdown	update-source loopback0
feature interface-vlan		address-family ipv4 unicast
feature vn-segment-vlan-based	interface Ethernet1/3	address-family l2vpn evpn
feature nv overlay	no switchport	send-community
	ip address 172.16.1.1/24	send-community extended
	ip ospf network point-to-point	route-reflector-client
	ip router ospf 100 area 0.0.0.0	neighbor 192.168.1.3
	ip pim sparse-mode	remote-as 200
ip pim rp-address 192.168.1.1 group-list 224.0.0.0/4	no shutdown	update-source loopback0
		address-family ipv4 unicast
	interface Ethernet1/4	send-community extended
	no switchport	route-reflector-client
	ip address 172.16.0.1/24	address-family l2vpn evpn
	ip ospf network point-to-point	send-community extended
	ip router ospf 100 area 0.0.0.0	route-reflector-client
	ip pim sparse-mode	neighbor 192.168.1.4
	no shutdown	remote-as 200
		update-source loopback0
	interface loopback0	address-family ipv4 unicast
	ip address 192.168.1.1/32	send-community extended
	ip router ospf 100 area 0.0.0.0	route-reflector-client
	ip pim sparse-mode	address-family l2vpn evpn
		send-community extended
	router ospf 100	route-reflector-client
	router-id 192.168.1.1	

**DC-1 Border Gateway-1 Configuration**

Enabling Features, RouteMap, B-G Config	VLAN,VNI,VTEP Config	OSPF Configuration	BGP/E
hostname MultisiteBG1 boot nxos bootflash:/nxos.9.2.3.bin nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-vlan feature vn-segment-vlan-based feature lldp feature nv overlay	<b>VLAN-VNI Mapping</b> vlan 101 vn-segment 900001 vlan 1000 vn-segment 2001002 vlan 1001 vn-segment 2001001  interface Vlan101 no shutdown mtu 9192 vrf member vxdan-900001 ip forward  <b>VTEP Config</b> interface nve1 no shutdown host-reachability protocol bgp source-interface loopback1 multisite border-gateway interface loopback100 member vni 900001 associate-vrf member vni 2001001 multisite ingress-replication ingress-replication protocol bgp member vni 2001002 multisite ingress-replication ingress-replication protocol bgp	interface Ethernet1/47 ip address 10.2.2.34/30 ip ospf network point-to-point ip router ospf 100 area 0.0.0.0 ip pim sparse-mode evpn multisite fabric-tracking no shutdown  interface Ethernet1/48 ip address 10.2.1.34/30 ip ospf network point-to-point ip router ospf 100 area 0.0.0.0 ip pim sparse-mode evpn multisite fabric-tracking no shutdown  interface loopback0 ip address 10.100.100.22/32 tag 54321 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  interface loopback1 ip address 10.200.200.22/32 tag 54321 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  interface loopback100 ip address 10.111.111.2/32 tag 54321 ip router ospf 100 area 0.0.0.0  router ospf 100 router-id 10.100.100.22	router route addre redi neigh rem updr add neigh rem updr add ser ser rev neigh rem updr add ser ser neigh rem updr add ser ser evpn vni 20 rd a rout rout vni 20 rd a rout rout vrf con rd au addre rout rout addre rout rout
evpn multisite border-gateway 200 delay-restore time 300	<b>Core-Facing Interface Config</b>		
route-map RMAP-REDIST-DIRECT permit 10 match tag 54321	interface Ethernet1/16 mtu 9216 ip address 10.52.21.2/30 tag 54321 evpn multisite dci-tracking no shutdown		

### DC-2 Border Gateway-2 Configuration

Enabling Features, RouteMap, B-G Config	VLAN,VNI,VTEP Config	OSPF Configuration
<pre>boot nxos bootflash:/nxos.9.3.0.221.bin hostname MultisiteBG2 nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-vlan feature vn-segment-vlan-based feature lldp feature nv overlay  evpn multisite border-gateway 100 delay-restore time 300  vlan 1,101,1000-1001 vlan 101   vn-segment 900001 vlan 1000   vn-segment 2001002 vlan 1001   vn-segment 2001001  route-map RMAP-REDIST-DIRECT permit 10 match tag 54321  interface Ethernet1/16 mtu 9216 ip address 10.52.21.1/30 tag 54321 evpn multisite dci-tracking no shutdown</pre>	<pre>interface Vlan101 no shutdown vrf member vxlan-900001 ip forward  interface nve1 no shutdown host-reachability protocol bgp source-interface loopback1 multisite border-gateway interface loopback100 member vni 900001 associate-vrf member vni 2001001   multisite ingress-replication   ingress-replication protocol bgp member vni 2001002   multisite ingress-replication   ingress-replication protocol bgp  vrf context vxlan-900001 vni 900001 rd auto address-family ipv4 unicast route-target both auto route-target both auto evpn address-family ipv6 unicast route-target both auto route-target both auto evpn</pre>	<pre>interface Ethernet1/1 description SITE-INTERNAL INTERFACE mtu 9216 medium p2p ip address 10.1.1.34/30 ip ospf network point-to-point ip router ospf 100 area 0.0.0.0 ip pim sparse-mode evpn multisite fabric-tracking no shutdown  interface Ethernet1/2 description SITE-INTERNAL INTERFACE mtu 9216 medium p2p ip address 10.1.2.34/30 ip ospf network point-to-point ip router ospf 100 area 0.0.0.0 ip pim sparse-mode evpn multisite fabric-tracking no shutdown  interface loopback0 description RID AND BGP PEERING ip address 10.100.100.21/32 tag 54321 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  interface loopback1 description NVE INTERFACE (PIP VTEP) ip address 10.200.200.21/32 tag 54321 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  interface loopback100 description MULTI-SITE INTERFACE (VIP VTEP) ip address 10.111.111.1/32 tag 54321 ip router ospf 100 area 0.0.0.0  router ospf 100 router-id 10.100.100.21</pre>

### DC-2 SPINE -1 Configuration

Enabling Features, RP Config	OSPF Configuration	BGP/EVPN Configuration
<pre>boot nxos bootflash:/nxos.9.2.3.bin hostname Multisitespine1 nv overlay evpn feature ospf feature bgp feature pim feature interface-vlan feature vn-segment-vlan-based feature nv overlay  ip pim rp-address 192.168.2.1 group-list 224.0.0.0/4</pre>	<pre>interface Ethernet1/1 mtu 9216 ip address 10.1.2.33/30 ip ospf network point-to-point ip router ospf 100 area 0.0.0.0 ip pim sparse-mode no shutdown  interface Ethernet1/47 ip address 172.16.10.1/24 ip ospf network point-to-point ip router ospf 100 area 0.0.0.0 ip pim sparse-mode no shutdown  interface Ethernet1/48 ip address 172.16.11.1/24 ip ospf network point-to-point ip router ospf 100 area 0.0.0.0 ip pim sparse-mode no shutdown  interface loopback0 ip address 192.168.2.1/32 ip router ospf 100 area 0.0.0.0 ip pim sparse-mode  router ospf 100 router-id 192.168.2.1</pre>	<pre>router bgp 100 router-id 192.168.2.1 address-family ipv4 unicast address-family l2vpn evpn neighbor 10.100.100.21   remote-as 100   update-source loopback0 address-family l2vpn evpn   send-community   send-community extended   route-reflector-client neighbor 192.168.2.3   remote-as 100   update-source loopback0 address-family ipv4 unicast   send-community extended   route-reflector-client address-family l2vpn evpn   send-community extended   route-reflector-client neighbor 192.168.2.4   remote-as 100   update-source loopback0 address-family ipv4 unicast   send-community extended   route-reflector-client address-family l2vpn evpn   send-community extended   route-reflector-client</pre>

## DC-2, LEAF -1 Configuration

Enabling Features, RP, VTEP Config	VLAN,VNI Configuration	OSPF Configuration
<pre>boot nxos bootflash:/nxos.7.0.3.17.5.bin hostname MultisteLeaf1 nv overlay evpn feature ospf feature bgp feature pim feature fabric forwarding feature interface-vlan feature vn-segment-vlan-based feature lldp feature nv overlay</pre>	<pre>vlan 101   vn-segment 900001 vlan 1000   vn-segment 2001002 vlan 1001   vn-segment 2001001</pre>	<pre>interface Ethernet1/1   ip address 172.16.12.2/24   ip ospf network point-to-point   ip router ospf 100 area 0.0.0.0   ip pim sparse-mode   no shutdown</pre>
<pre>fabric forwarding anycast-gateway-mac 0000.2222.3333 ip pim rp-address 192.168.2.1 group-list 224.0.0.0/4</pre>	<pre>interface Vlan101   no shutdown   vrf member vxlan-900001   ip forward</pre>	<pre>interface Ethernet1/6   ip address 172.16.10.2/24   ip ospf network point-to-point   ip router ospf 100 area 0.0.0.0   ip pim sparse-mode   no shutdown</pre>
<pre>interface nve1   no shutdown   host-reachability protocol bgp   source-interface loopback0   member vni 900001 associate-vrf   member vni 2001001     suppress-arp     mcast-group 239.0.0.1   member vni 2001002     suppress-arp     mcast-group 239.0.0.1</pre>	<pre>interface Vlan1000   no shutdown   vrf member vxlan-900001   ip address 4.2.2.1/24   ipv6 address 4:2:0:1::1/64   fabric forwarding mode anycast-gateway</pre>	<pre>interface Ethernet1/16   switchport   switchport mode trunk   no shutdown</pre>
	<pre>interface Vlan1001   no shutdown   vrf member vxlan-900001   ip address 4.1.1.1/24   ipv6 address 4:1:0:1::1/64   fabric forwarding mode anycast-gateway</pre>	<pre>interface loopback0   ip address 192.168.2.4/32   ip router ospf 100 area 0.0.0.0   ip pim sparse-mode</pre>
	<pre>vrf context vxlan-900001   vni 900001   rd auto   address-family ipv4 unicast     route-target both auto     route-target both auto evpn   address-family ipv6 unicast     route-target both auto     route-target both auto evpn</pre>	<pre>router ospf 100   router-id 192.168.2.4</pre>

## Verify



LEAF-1 VERIFICATION

<pre>leaf1# show cdp neighbors Capability Codes: R - Router, T - Trans-Bridge, B - Source-Route-                   S - Switch, H - Host, I - IGMP, r - Repeater,                   V - VoIP-Phone, D - Remotely-Managed-Device,                   s - Supports-STP-Dispute  Device-ID         Local Intrfce  Hldtme  Capability  Platform MX066-H-01-SW.cisco.com                 mgmt0         142     S I         WS-C2960X-48T  ToLeaf1          Eth1/23       163     S I         WS-C3750X-24S  spine1(SAL1948U4Y1)                 Eth2/23       156     R S s      N9K-C9396PX  spine2(SAL1949UELD)                 Eth2/24       152     R S s      N9K-C9396PX  leaf1#  leaf1# sh ip int brief   exclude down IP Interface Status for VRF "default"(1) Interface      IP Address      Interface Status Lo0            192.168.1.3    protocol-up/link-up/admin-up Eth2/23       172.16.1.2     protocol-up/link-up/admin-up Eth2/24       172.16.2.2     protocol-up/link-up/admin-up leaf1#  leaf1# sh nve vrf VRF-Name      VNI              Interface Gateway-MAC ----- vxlan-900001 900001         nve1         00de.fb01.9fc1  leaf1# sh nve vxlan-params VxLAN Dest. UDP Port: 4789</pre>	<pre>leaf1# show ip pim rp PIM RP Status Information for VRF "default" BSR disabled Auto-RP disabled BSR RP Candidate policy: None BSR RP policy: None Auto-RP Announce policy: None Auto-RP Discovery policy: None  RP: 192.168.1.1, (0), uptime: 3w1d priority: 0, RP-source: (local), group ranges: 224.0.0.0/4  RP: 192.168.1.2, (0), uptime: 3w1d priority: 0, RP-source: (local), group ranges: 224.0.0.0/4  leaf1#  leaf1# sh nve interface Interface: nve1, State: Up, encapsulation: VXLAN VPC Capability: VPC-VIP-Only [not-notified] Local Router MAC: 00de.fb01.9fc1 Host Learning Mode: Control-Plane Source-Interface: loopback0 (primary: 192.168.1.3, secondary: 0.  leaf1#</pre>	<pre>leaf1# sh nve peers Interface Peer-IP ----- nve1      10.111.111.2 nve1      10.200.200.2 nve1      192.168.1.4  leaf1#  leaf1# show nve vni Codes: CP - Control Plane        UC - Unconfigured        SU - Suppress Unicast        SU - Suppress Unicast  Interface VNI      Multicast-group ----- nve1      900001          n/a nve1      2001001        239.0.0.1 nve1      2001002        239.0.0.1  leaf1#  leaf1# sh vrf vxlan-900001 VRF-Name: vxlan-900001 VFNID: unknown RD: 192.168.1.3:3 VNI: 900001, State Max Routes: 0 Mid Table-ID: 0x8000000 Table-ID: 0x0000000</pre>
--	---	---

CONTROL PLANE LEARNING: Destination Prefix is 4.2.2.100 <====> 00c8.8bf9.5f41 <====> Vlan1000 <====> VN12001002

<p>Destination Prefix is learnt on host-connected LEAF 192.168.2.4</p> <pre>MultistateLeaf1# sh ip route 4.2.2.100 vrf vxlan-900001 IP Route Table for VRF "vxlan-900001" *** denotes best ucast next-hop **** denotes best mcast next-hop '[x/y]' denotes [preference/metric] '%&lt;string&gt;' in via output denotes VRF &lt;string&gt;  4.2.2.100/32, ubest/mbest: 1/0, attached *via 4.2.2.100, Vlan1000, [190/0], 4w2d, hnm  MultistateLeaf1# MultistateLeaf1# sh bgp l2vpn evpn summary BGP summary information for VRF default, address family L2VPN EVPN BGP router identifier 192.168.2.4, local AS number 100 BGP table version is 56, L2VPN EVPN config peers 2, capable peers 2 36 network entries and 50 paths using 7968 bytes of memory BGP attribute entries [26/4160], BGP AS path entries [1/6] BGP community entries [0/0], BGP clusterlist entries [2/8]  Neighbor      V  AS  MsgRcvd  MsgSent  TblVer  InQ  OutQ  Up/Down  State/PfxRcd 192.168.2.1   4 100  44038   44029   56     0    0    4w2d 14 192.168.2.2   4 100  44037   44030   56     0    0    4w2d 14  MultistateLeaf1# MultistateLeaf1# sh nve peers Interface Peer-IP      State LearnType Uptime  Router-Mac ----- nve1      10.111.111.1         Up    CP         4w2d   0200.0a6f.6f01 nve1      10.200.200.21        Up    CP         4w2d   n/a  MultistateLeaf1# show nve vni Codes: CP - Control Plane      DP - Data Plane        UC - Unconfigured        SA - Suppress ARP        SU - Suppress Unknown Unicast        Xconn - Crossconnect        MS-IR - Multisite Ingress Replication  Interface VNI      Multicast-group  State Mode Type [RD/VRF]  Flags ----- nve1      900001          n/a             Up   CP   L3 [vxlan-900001] nve1      2001001        239.0.0.1       Up   CP   L2 [1001]      SA nve1      2001002        239.0.0.1       Up   CP   L2 [1000]      SA  MultistateLeaf1#</pre>	<p>Host-Connected Leaf is advertising this prefix to its SPINE (192.168.2.1)</p> <pre>MultistateLeaf1# sh bgp l2vpn evpn neighbors 192.168.2.1 advertised-routes  Peer 192.168.2.1 routes for address family L2VPN EVPN: BGP table version is 56, Local Router ID is 192.168.2.4 Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, &gt;-best Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I= njected Origin codes: i - IGP, e - EGP, ? - incomplete,   - multipath, &amp; - backup  Network      Next Hop      Metric  LocPrf  Weight Path Route Distinguisher: 10.100.100.21:33767 Route Distinguisher: 10.100.100.21:33768 Route Distinguisher: 10.100.100.22:33767 Route Distinguisher: 10.100.100.22:33768 Route Distinguisher: 192.168.1.3:33767 Route Distinguisher: 192.168.1.3:33768 Route Distinguisher: 192.168.1.4:33767 Route Distinguisher: 192.168.1.4:33768  Route Distinguisher: 192.168.2.4:33767 (L2VNI 2001002) *&gt;[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[0]:[0.0.0.0]/216 192.168.2.4 100 32768 i *&gt;[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[32]:[4.2.2.100]/272 192.168.2.4 100 32768 i  Route Distinguisher: 192.168.2.4:33768 (L2VNI 2001001) *&gt;[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[0]:[0.0.0.0]/216 192.168.2.4 100 32768 i *&gt;[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[32]:[4.1.1.100]/272 192.168.2.4 100 32768 i  Route Distinguisher: 192.168.2.4:3 (L3VNI 900001)  MultistateLeaf1#</pre>	<p>SPINE is advertising the same prefix to the LEAF</p> <pre>Multistatespine1# sh bgp l2vpn evpn advertised-routes  Peer 10.100.100.21 routes for address family L2VPN EVPN: BGP table version is 26, Local Router ID is 10.100.100.21 Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, &gt;-best Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I= njected Origin codes: i - IGP, e - EGP, ? - incomplete,   - multipath, &amp; - backup  Network      Next Hop      Metric  LocPrf  Weight Path Route Distinguisher: 10.100.100.21:33767 Route Distinguisher: 10.100.100.21:33768 Route Distinguisher: 10.100.100.22:33767 Route Distinguisher: 10.100.100.22:33768 Route Distinguisher: 192.168.1.3:33767 Route Distinguisher: 192.168.1.3:33768 Route Distinguisher: 192.168.1.4:33767 Route Distinguisher: 192.168.1.4:33768  Route Distinguisher: 192.168.2.4:33767 (L2VNI 2001002) *&gt;[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[0]:[0.0.0.0]/216 192.168.2.4 100 32768 i *&gt;[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[32]:[4.2.2.100]/272 192.168.2.4 100 32768 i  Route Distinguisher: 192.168.2.4:33768 (L2VNI 2001001) *&gt;[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[0]:[0.0.0.0]/216 192.168.2.4 100 32768 i *&gt;[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[32]:[4.1.1.100]/272 192.168.2.4 100 32768 i  Route Distinguisher: 192.168.2.4:3 (L3VNI 900001)  Multistatespine1#</pre>
---	---	--

**eBGP Neighborhood between Border Gateways**

**MultisiteBG2# sh bgp l2vpn evpn summary**

BGP summary information for VRF default, address family L2VPN EVPN  
 BGP router identifier 10.100.100.21, local AS number 100  
 BGP table version is 60, L2VPN EVPN config peers 3, capable peers 3  
 43 network entries and 47 paths using 8160 bytes of memory  
 BGP attribute entries [37/6068], BGP AS path entries [1/6]  
 BGP community entries [0/0], BGP clusterlist entries [2/8]

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
10.100.100.22	4	200	44066	44039	60	0	0	4w2d 12	
192.168.2.1	4	100	44050	44037	60	0	0	4w2d 4	
192.168.2.2	4	100	44048	44037	60	0	0	4w2d 4	

Neighbor	T	AS	PfxRcd	Type-2	Type-3	Type-4	Type-5
10.100.100.22	E	200	12	10	2	0	0
192.168.2.1	I	100	4	4	0	0	0
192.168.2.2	I	100	4	4	0	0	0

MultisiteBG2#

**MultisiteBG2# sh bgp ipv4 unicast summary**

BGP summary information for VRF default, address family IPv4 Unicast  
 BGP router identifier 10.100.100.21, local AS number 100  
 BGP table version is 11, IPv4 Unicast config peers 1, capable peers 1  
 7 network entries and 8 paths using 1800 bytes of memory  
 BGP attribute entries [2/328], BGP AS path entries [1/6]  
 BGP community entries [0/0], BGP clusterlist entries [2/8]

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
10.52.21.2	4	200	44043	44041	11	0	0	4w2d 4	

MultisiteBG2#

**MultisiteBG2# sh bgp ipv4 unicast neighbors 10.52.21.2 advertised-routes**

Peer 10.52.21.2 routes for address family IPv4 Unicast:  
 BGP table version is 11, Local Router ID is 10.100.100.21  
 Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best  
 Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-i  
 njected  
 Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - b  
 est2

Network	Next Hop	Metric	LocPrf	Weight	Path
*>r10.52.21.0/30	0.0.0.0	0	100	32768	?
*>r10.100.100.21/32	0.0.0.0	0	100	32768	?
*>r10.111.111.1/32	0.0.0.0	0	100	32768	?
*>r10.200.200.21/32	0.0.0.0	0	100	32768	?

MultisiteBG2#

**MultisiteBG1# sh bgp l2vpn evpn summary**

BGP summary information for VRF default, address family L2VPN EVPN  
 BGP router identifier 10.100.100.22, local AS number 100  
 BGP table version is 82, L2VPN EVPN config peers 3, capable peers 3  
 37 network entries and 45 paths using 7296 bytes of memory  
 BGP attribute entries [37/6068], BGP AS path entries [1/6]  
 BGP community entries [0/0], BGP clusterlist entries [2/8]

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
10.100.100.21	4	100	44126	44106	82	0	0	4w2d 12	
192.168.1.1	4	200	44122	44104	82	0	0	4w2d 4	
192.168.1.2	4	200	44121	44104	82	0	0	4w2d 4	

Neighbor	T	AS	PfxRcd	Type-2	Type-3	Type-4	Type-5
10.100.100.21	E	100	8	6	2	0	0
192.168.1.1	I	200	8	8	0	0	0
192.168.1.2	I	200	8	8	0	0	0

MultisiteBG1#

**MultisiteBG1# sh bgp ipv4 unicast summary**

BGP summary information for VRF default, address family IPv4 Unicast  
 BGP router identifier 10.100.100.22, local AS number 100  
 BGP table version is 11, IPv4 Unicast config peers 1, capable peers 1  
 7 network entries and 8 paths using 1692 bytes of memory  
 BGP attribute entries [2/328], BGP AS path entries [1/6]  
 BGP community entries [0/0], BGP clusterlist entries [2/8]

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
10.52.21.1	4	100	44106	44105	11	0	0	4w2d 4	

MultisiteBG1#

**MultisiteBG1# show bgp ipv4 unicast neighbors 10.52.21.1 advertised-routes**

Peer 10.52.21.1 routes for address family IPv4 Unicast:  
 BGP table version is 11, Local Router ID is 10.100.100.22  
 Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best  
 Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-i  
 njected  
 Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - b  
 est2

Network	Next Hop	Metric	LocPrf	Weight	Path
*>r10.52.21.0/30	0.0.0.0	0	100	32768	?
*>r10.100.100.22/32	0.0.0.0	0	100	32768	?
*>r10.111.111.2/32	0.0.0.0	0	100	32768	?
*>r10.200.200.22/32	0.0.0.0	0	100	32768	?

MultisiteBG1#

Route exchange between Border Gateways (B.G-2 ==> B.G-1)	In DC-1, Route advertisement																																																																																																																																																																																																																		
<pre> MultisiteBG2# sh bgp l2vpn evpn neighbors 10.100.100.22 advertised-routes Peer 10.100.100.22 routes for address family L2VPN EVPN: BGP table version is 60, Local Router ID is 10.100.100.21 Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, &gt;-best Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected Origin codes: i - IGP, e - EGP, ? - incomplete,   - multipath, &amp; - backup, 2 - best2 </pre>	<pre> MultisiteBG1# sh bgp l2vpn evpn neighbors 192.168.1.1 Peer 192.168.1.1 routes for address family L2VPN EVPN: BGP table version is 82, Local Router ID is 10.100.100.21 Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, &gt;-best Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected Origin codes: i - IGP, e - EGP, ? - incomplete,   - multipath, &amp; - backup, 2 - best2 </pre>																																																																																																																																																																																																																		
<table border="1"> <thead> <tr> <th>Network</th> <th>Next Hop</th> <th>Metric</th> <th>LocPrf</th> <th>Weight</th> <th>Path</th> </tr> </thead> <tbody> <tr> <td>Route Distinguisher: 10.100.100.21:27001</td> <td>(ES [0300.0000.0000.6400.0309 0])</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>*&gt;l[4]:[0300.0000.0000.6400.0309]:[32]:[10.200.200.21]/136</td> <td>10.200.200.21</td> <td></td> <td>100</td> <td>32768</td> <td>i</td> </tr> <tr> <td>Route Distinguisher: 10.100.100.21:33767</td> <td>(L2VNI 2001002)</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>*&gt;l[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]/216</td> <td>10.200.200.21</td> <td></td> <td>100</td> <td>32768</td> <td>i</td> </tr> <tr> <td>*&gt;l[3]:[0]:[32]:[10.200.200.21]/88</td> <td>10.200.200.21</td> <td></td> <td>100</td> <td>32768</td> <td>i</td> </tr> <tr> <td>Route Distinguisher: 10.100.100.21:33768</td> <td>(L2VNI 2001001)</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>*&gt;l[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]/216</td> <td>10.200.200.21</td> <td></td> <td>100</td> <td>32768</td> <td>i</td> </tr> <tr> <td>*&gt;l[3]:[0]:[32]:[10.200.200.21]/88</td> <td>10.200.200.21</td> <td></td> <td>100</td> <td>32768</td> <td>i</td> </tr> <tr> <td>Route Distinguisher: 10.100.100.22:33767</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Route Distinguisher: 10.100.100.22:33768</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Route Distinguisher: 192.168.1.3:33767</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Route Distinguisher: 192.168.1.3:33768</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Route Distinguisher: 192.168.1.4:33767</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>Route Distinguisher: 192.168.1.4:33768</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td><b>Route Distinguisher: 192.168.2.4:33767</b></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>*&gt;l[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[0]:[0.0.0.0]/216</td> <td>192.168.2.4</td> <td></td> <td>100</td> <td>0</td> <td>i</td> </tr> <tr> <td>*&gt;l[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[32]:[4.2.2.100]/272</td> <td>192.168.2.4</td> <td></td> <td>100</td> <td>0</td> <td>i</td> </tr> <tr> <td>Route Distinguisher: 192.168.2.4:33768</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>*&gt;i[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[0]:[0.0.0.0]/216</td> <td>192.168.2.4</td> <td></td> <td>100</td> <td>0</td> <td>i</td> </tr> <tr> <td>*&gt;i[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[32]:[4.1.1.100]/272</td> <td>192.168.2.4</td> <td></td> <td>100</td> <td>0</td> <td>i</td> </tr> <tr> <td>Route Distinguisher: 10.100.100.21:3</td> <td>(L3VNI 900001)</td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Network	Next Hop	Metric	LocPrf	Weight	Path	Route Distinguisher: 10.100.100.21:27001	(ES [0300.0000.0000.6400.0309 0])					*>l[4]:[0300.0000.0000.6400.0309]:[32]:[10.200.200.21]/136	10.200.200.21		100	32768	i	Route Distinguisher: 10.100.100.21:33767	(L2VNI 2001002)					*>l[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]/216	10.200.200.21		100	32768	i	*>l[3]:[0]:[32]:[10.200.200.21]/88	10.200.200.21		100	32768	i	Route Distinguisher: 10.100.100.21:33768	(L2VNI 2001001)					*>l[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]/216	10.200.200.21		100	32768	i	*>l[3]:[0]:[32]:[10.200.200.21]/88	10.200.200.21		100	32768	i	Route Distinguisher: 10.100.100.22:33767						Route Distinguisher: 10.100.100.22:33768						Route Distinguisher: 192.168.1.3:33767						Route Distinguisher: 192.168.1.3:33768						Route Distinguisher: 192.168.1.4:33767						Route Distinguisher: 192.168.1.4:33768						<b>Route Distinguisher: 192.168.2.4:33767</b>						*>l[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[0]:[0.0.0.0]/216	192.168.2.4		100	0	i	*>l[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[32]:[4.2.2.100]/272	192.168.2.4		100	0	i	Route Distinguisher: 192.168.2.4:33768						*>i[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[0]:[0.0.0.0]/216	192.168.2.4		100	0	i	*>i[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[32]:[4.1.1.100]/272	192.168.2.4		100	0	i	Route Distinguisher: 10.100.100.21:3	(L3VNI 900001)					<table border="1"> <thead> <tr> <th>Network</th> <th>Next Hop</th> <th>Metric</th> </tr> </thead> <tbody> <tr> <td>Route Distinguisher: 10.100.100.21:33767</td> <td>10.100.100.21:33767</td> <td></td> </tr> <tr> <td>*&gt;e[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]</td> <td>10.200.200.21</td> <td></td> </tr> <tr> <td>Route Distinguisher: 10.100.100.21:33768</td> <td></td> <td></td> </tr> <tr> <td>*&gt;e[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]</td> <td>10.200.200.21</td> <td></td> </tr> <tr> <td>Route Distinguisher: 10.100.100.22:27001</td> <td>(ES [0300.0000.0000.c800.0309]:[32]:[10.200.200.21])</td> <td></td> </tr> <tr> <td>*&gt;l[4]:[0300.0000.0000.c800.0309]:[32]:[10.200.200.21]/136</td> <td>10.200.200.21</td> <td></td> </tr> <tr> <td>Route Distinguisher: 10.100.100.22:33767</td> <td>(L2VNI 2001002)</td> <td></td> </tr> <tr> <td>*&gt;l[2]:[0]:[0]:[48]:[6cb2.ae91.38bf]:[0]:[0.0.0.0]/216</td> <td>10.200.200.21</td> <td></td> </tr> <tr> <td>*&gt;l[3]:[0]:[32]:[10.200.200.21]/88</td> <td>10.200.200.21</td> <td></td> </tr> <tr> <td>Route Distinguisher: 10.100.100.22:33768</td> <td>(L2VNI 2001001)</td> <td></td> </tr> <tr> <td>*&gt;l[2]:[0]:[0]:[48]:[6cb2.ae91.38bf]:[0]:[0.0.0.0]/216</td> <td>10.200.200.21</td> <td></td> </tr> <tr> <td>*&gt;l[3]:[0]:[32]:[10.200.200.21]/88</td> <td>10.200.200.21</td> <td></td> </tr> <tr> <td>Route Distinguisher: 10.100.100.22:33767</td> <td></td> <td></td> </tr> <tr> <td>*&gt;l[2]:[0]:[0]:[48]:[6cb2.ae91.38bf]:[0]:[0.0.0.0]/216</td> <td>10.200.200.21</td> <td></td> </tr> <tr> <td>*&gt;l[3]:[0]:[32]:[10.200.200.21]/88</td> <td>10.200.200.21</td> <td></td> </tr> <tr> <td>Route Distinguisher: 192.168.1.3:33767</td> <td></td> <td></td> </tr> <tr> <td>Route Distinguisher: 192.168.1.3:33768</td> <td></td> <td></td> </tr> <tr> <td>Route Distinguisher: 192.168.1.4:33767</td> <td></td> <td></td> </tr> <tr> <td>Route Distinguisher: 192.168.1.4:33768</td> <td></td> <td></td> </tr> <tr> <td><b>Route Distinguisher: 192.168.2.4:33767</b></td> <td></td> <td></td> </tr> <tr> <td>*&gt;e[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[0]:[0.0.0.0]</td> <td>10.111.111.1</td> <td>200</td> </tr> <tr> <td>*&gt;e[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[32]:[4.2.2.100]</td> <td>10.111.111.1</td> <td>200</td> </tr> <tr> <td>Route Distinguisher: 192.168.2.4:33768</td> <td></td> <td></td> </tr> <tr> <td>*&gt;e[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[0]:[0.0.0.0]</td> <td>10.111.111.1</td> <td>200</td> </tr> <tr> <td>*&gt;e[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[32]:[4.1.1.100]</td> <td>10.111.111.1</td> <td>200</td> </tr> </tbody> </table>	Network	Next Hop	Metric	Route Distinguisher: 10.100.100.21:33767	10.100.100.21:33767		*>e[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]	10.200.200.21		Route Distinguisher: 10.100.100.21:33768			*>e[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]	10.200.200.21		Route Distinguisher: 10.100.100.22:27001	(ES [0300.0000.0000.c800.0309]:[32]:[10.200.200.21])		*>l[4]:[0300.0000.0000.c800.0309]:[32]:[10.200.200.21]/136	10.200.200.21		Route Distinguisher: 10.100.100.22:33767	(L2VNI 2001002)		*>l[2]:[0]:[0]:[48]:[6cb2.ae91.38bf]:[0]:[0.0.0.0]/216	10.200.200.21		*>l[3]:[0]:[32]:[10.200.200.21]/88	10.200.200.21		Route Distinguisher: 10.100.100.22:33768	(L2VNI 2001001)		*>l[2]:[0]:[0]:[48]:[6cb2.ae91.38bf]:[0]:[0.0.0.0]/216	10.200.200.21		*>l[3]:[0]:[32]:[10.200.200.21]/88	10.200.200.21		Route Distinguisher: 10.100.100.22:33767			*>l[2]:[0]:[0]:[48]:[6cb2.ae91.38bf]:[0]:[0.0.0.0]/216	10.200.200.21		*>l[3]:[0]:[32]:[10.200.200.21]/88	10.200.200.21		Route Distinguisher: 192.168.1.3:33767			Route Distinguisher: 192.168.1.3:33768			Route Distinguisher: 192.168.1.4:33767			Route Distinguisher: 192.168.1.4:33768			<b>Route Distinguisher: 192.168.2.4:33767</b>			*>e[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[0]:[0.0.0.0]	10.111.111.1	200	*>e[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[32]:[4.2.2.100]	10.111.111.1	200	Route Distinguisher: 192.168.2.4:33768			*>e[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[0]:[0.0.0.0]	10.111.111.1	200	*>e[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[32]:[4.1.1.100]	10.111.111.1	200
Network	Next Hop	Metric	LocPrf	Weight	Path																																																																																																																																																																																																														
Route Distinguisher: 10.100.100.21:27001	(ES [0300.0000.0000.6400.0309 0])																																																																																																																																																																																																																		
*>l[4]:[0300.0000.0000.6400.0309]:[32]:[10.200.200.21]/136	10.200.200.21		100	32768	i																																																																																																																																																																																																														
Route Distinguisher: 10.100.100.21:33767	(L2VNI 2001002)																																																																																																																																																																																																																		
*>l[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]/216	10.200.200.21		100	32768	i																																																																																																																																																																																																														
*>l[3]:[0]:[32]:[10.200.200.21]/88	10.200.200.21		100	32768	i																																																																																																																																																																																																														
Route Distinguisher: 10.100.100.21:33768	(L2VNI 2001001)																																																																																																																																																																																																																		
*>l[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]/216	10.200.200.21		100	32768	i																																																																																																																																																																																																														
*>l[3]:[0]:[32]:[10.200.200.21]/88	10.200.200.21		100	32768	i																																																																																																																																																																																																														
Route Distinguisher: 10.100.100.22:33767																																																																																																																																																																																																																			
Route Distinguisher: 10.100.100.22:33768																																																																																																																																																																																																																			
Route Distinguisher: 192.168.1.3:33767																																																																																																																																																																																																																			
Route Distinguisher: 192.168.1.3:33768																																																																																																																																																																																																																			
Route Distinguisher: 192.168.1.4:33767																																																																																																																																																																																																																			
Route Distinguisher: 192.168.1.4:33768																																																																																																																																																																																																																			
<b>Route Distinguisher: 192.168.2.4:33767</b>																																																																																																																																																																																																																			
*>l[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[0]:[0.0.0.0]/216	192.168.2.4		100	0	i																																																																																																																																																																																																														
*>l[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[32]:[4.2.2.100]/272	192.168.2.4		100	0	i																																																																																																																																																																																																														
Route Distinguisher: 192.168.2.4:33768																																																																																																																																																																																																																			
*>i[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[0]:[0.0.0.0]/216	192.168.2.4		100	0	i																																																																																																																																																																																																														
*>i[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[32]:[4.1.1.100]/272	192.168.2.4		100	0	i																																																																																																																																																																																																														
Route Distinguisher: 10.100.100.21:3	(L3VNI 900001)																																																																																																																																																																																																																		
Network	Next Hop	Metric																																																																																																																																																																																																																	
Route Distinguisher: 10.100.100.21:33767	10.100.100.21:33767																																																																																																																																																																																																																		
*>e[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]	10.200.200.21																																																																																																																																																																																																																		
Route Distinguisher: 10.100.100.21:33768																																																																																																																																																																																																																			
*>e[2]:[0]:[0]:[48]:[005d.738e.a337]:[0]:[0.0.0.0]	10.200.200.21																																																																																																																																																																																																																		
Route Distinguisher: 10.100.100.22:27001	(ES [0300.0000.0000.c800.0309]:[32]:[10.200.200.21])																																																																																																																																																																																																																		
*>l[4]:[0300.0000.0000.c800.0309]:[32]:[10.200.200.21]/136	10.200.200.21																																																																																																																																																																																																																		
Route Distinguisher: 10.100.100.22:33767	(L2VNI 2001002)																																																																																																																																																																																																																		
*>l[2]:[0]:[0]:[48]:[6cb2.ae91.38bf]:[0]:[0.0.0.0]/216	10.200.200.21																																																																																																																																																																																																																		
*>l[3]:[0]:[32]:[10.200.200.21]/88	10.200.200.21																																																																																																																																																																																																																		
Route Distinguisher: 10.100.100.22:33768	(L2VNI 2001001)																																																																																																																																																																																																																		
*>l[2]:[0]:[0]:[48]:[6cb2.ae91.38bf]:[0]:[0.0.0.0]/216	10.200.200.21																																																																																																																																																																																																																		
*>l[3]:[0]:[32]:[10.200.200.21]/88	10.200.200.21																																																																																																																																																																																																																		
Route Distinguisher: 10.100.100.22:33767																																																																																																																																																																																																																			
*>l[2]:[0]:[0]:[48]:[6cb2.ae91.38bf]:[0]:[0.0.0.0]/216	10.200.200.21																																																																																																																																																																																																																		
*>l[3]:[0]:[32]:[10.200.200.21]/88	10.200.200.21																																																																																																																																																																																																																		
Route Distinguisher: 192.168.1.3:33767																																																																																																																																																																																																																			
Route Distinguisher: 192.168.1.3:33768																																																																																																																																																																																																																			
Route Distinguisher: 192.168.1.4:33767																																																																																																																																																																																																																			
Route Distinguisher: 192.168.1.4:33768																																																																																																																																																																																																																			
<b>Route Distinguisher: 192.168.2.4:33767</b>																																																																																																																																																																																																																			
*>e[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[0]:[0.0.0.0]	10.111.111.1	200																																																																																																																																																																																																																	
*>e[2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[32]:[4.2.2.100]	10.111.111.1	200																																																																																																																																																																																																																	
Route Distinguisher: 192.168.2.4:33768																																																																																																																																																																																																																			
*>e[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[0]:[0.0.0.0]	10.111.111.1	200																																																																																																																																																																																																																	
*>e[2]:[0]:[0]:[48]:[00c8.8bf9.5f42]:[32]:[4.1.1.100]	10.111.111.1	200																																																																																																																																																																																																																	
MultisiteBG2#	MultisiteBG1#																																																																																																																																																																																																																		

CONTROL PLANE VERIFICATION AT DC-1 (Spine-1, Leaf-1): Destination Prefix is 4.2.2.10 <====> 00c8.8bf9.5f41 <====> Vlan1000 <====> V

spine1# sh bgp ipv4 unicast summary

```
BGP summary information for VRF default, address family IPv4 Unicast
BGP router identifier 192.168.1.1, local AS number 200
BGP table version is 3, IPv4 Unicast config peers 3, capable peers 2
0 network entries and 0 paths using 0 bytes of memory
BGP attribute entries [0/0], BGP AS path entries [0/0]
BGP community entries [0/0], BGP clusterlist entries [0/0]

Neighbor      V   AS MsgRcvd MsgSent  TblVer  InQ OutQ Up/Down State/PfxRcd
10.100.100.22 4   200  43997  43988    0    0    0 4w2d 0 (No Cap)
192.168.1.3   4   200  43986  43984    3    0    0 4w2d 0
192.168.1.4   4   200  43990  43987    3    0    0 4w2d 0
spine1#
```

spine1# sh ip route 10.100.100.22

```
IP Route Table for VRF "default"
''' denotes best ucast next-hop
''' denotes best mcast next-hop
'[x/y]' denotes [preference/metric]
'%<string>' in via output denotes VRF <string>

10.100.100.22/32, ubest/mbest: 1/0
   via 10.2.2.34, Eth1/1, [110/41], 4w2d, ospf-100, intra
spine1#
```

spine1# sh bgp l2vpn evpn summary

```
BGP summary information for VRF default, address family L2VPN EVPN
BGP router identifier 192.168.1.1, local AS number 200
BGP table version is 31, L2VPN EVPN config peers 3, capable peers 3
19 network entries and 19 paths using 4256 bytes of memory
BGP attribute entries [17/2788], BGP AS path entries [1/6]
BGP community entries [0/0], BGP clusterlist entries [0/0]

Neighbor      V   AS MsgRcvd MsgSent  TblVer  InQ OutQ Up/Down State/PfxRcd
10.100.100.22 4   200  44002  43993    31    0    0 4w2d 11
192.168.1.3   4   200  43991  43989    31    0    0 4w2d 4
192.168.1.4   4   200  43996  43992    31    0    0 4w2d 4
spine1#
```

spine1# sh bgp l2vpn evpn 00c8.8bf9.5f41

```
BGP routing table information for VRF default, address family L2VPN EVPN
Route Distinguisher: 192.168.2.4:33767
BGP routing table entry for [2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[0]:[0.0.0.0]/216,
version 27
Paths: (1 available, best #1)
Flags: (0x000202) (high32 00000000) on xmit-list, is not in l2rib/evpn, is not i
n HW
Multipath: iBGP

Advertized path-id 1
Path type: internal, path is valid, is best path, no labeled nexthop
AS-Path: 100 , path sourced external to AS
 10.111.111.2 (metric 41) from 10.100.100.22 (10.100.100.22)
  Origin IGP, MED 2000, localpref 100, weight 0
  Received label 2001002
  Extcommunity: RT:200:2001002 ENCAP:8

Path-id 1 advertised to peers:
 192.168.1.3 192.168.1.4
BGP routing table entry for [2]:[0]:[0]:[48]:[00c8.8bf9.5f41]:[32]:[4.2.2.100]/2
72, version 29
Paths: (1 available, best #1)
Flags: (0x000202) (high32 00000000) on xmit-list, is not in l2rib/evpn, is not i
n HW
Multipath: iBGP

Advertized path-id 1
Path type: internal, path is valid, is best path, no labeled nexthop
AS-Path: 100 , path sourced external to AS
 10.111.111.2 (metric 41) from 10.100.100.22 (10.100.100.22)
  Origin IGP, MED 2000, localpref 100, weight 0
  Received label 2001002 900001
  Extcommunity: RT:200:900001 RT:200:2001002 ENCAP:8 Router MAC:0200.0a6f.6f
  2

Path-id 1 advertised to peers:
 192.168.1.3 192.168.1.4
spine1#
```

```
leaf1# sh bgp
BGP summary in
BGP router ide
BGP table vers
36 network ent
BGP attribute
BGP community

Neighbor
192.168.1.1
192.168.1.2
leaf1#

leaf1# show bgp
BGP routing ta
BGP routing ta
Paths: (1 avail
Flags: (0x0000
vpni version
Advertized p
Path type: i
1
32]:[4.2.2.100
AS-Path: 100
10.111.111
Origin 1
Received
Extcommu
RT:2
RT:2
ENCA
Rout
Originat
VRF advertis
Path-id 1 no
VRF AF adver
Path-id 1 no
leaf1#
```

Host Reachability Verification from DC-1 to DC-2

```
ToLeaf1#show ip int br | e down
Interface      IP-Address      OK? Method Status Protocol
Vlan1000      4.2.2.10        YES NVRAM  up        up
Vlan1001      4.1.1.10        YES NVRAM  up        up
GigabitEthernet1/0/1 unassigned      YES unset  up        up
ToLeaf1#

ToLeaf1#ping 4.2.2.100
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 4.2.2.100, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/4/9 ms
ToLeaf1#

ToLeaf1#show ip arp 4.2.2.100
Protocol Address      Age (min)  Hardware Addr  Type  Interface
Internet 4.2.2.100    54         00c8.8bf9.5f41 ARPA  Vlan1000
ToLeaf1#

toMultisiteLeaf1#sh ip interf bri | ex down
Interface      IP-Address      OK? Method Status Protocol
Vlan1000      4.2.2.100        YES NVRAM  up        up
Vlan1001      4.1.1.100        YES NVRAM  up        up
GigabitEthernet2/0/1 unassigned      YES unset  up        up

toMultisiteLeaf1#sh ip arp 4.2.2.100
Protocol Address      Age (min)  Hardware Addr  Type  Interface
Internet 4.2.2.100    -          00c8.8bf9.5f41 ARPA  Vlan1000
toMultisiteLeaf1#
```

Reachability Verification from DC-1 Leaf-1

```
leaf1# show mac address-table | i 00c8.8bf9.5f41|+|Type
VLAN      MAC Address      Type  age  Secure  NTPY  Ports/SWID.SSID.LID
* 1000    00c8.8bf9.5f41  dynamic  0    F    F    nve1/10.111.111.2
leaf1#

leaf1# show ip interface bri vrf all
IP Interface Status for VRF "default"(1)
Interface      IP Address      Interface Status
Lo0            192.168.1.3     protocol-up/link-up/admin-up
Eth1/18        1.1.1.1         protocol-down/link-down/admin-d
Eth2/23        172.16.1.2     protocol-up/link-up/admin-up
Eth2/24        172.16.2.2     protocol-up/link-up/admin-up

IP Interface Status for VRF "management"(2)
Interface      IP Address      Interface Status
mgmt0          10.31.121.19   protocol-up/link-up/admin-up

IP Interface Status for VRF "vxlan-900001"(3)
Interface      IP Address      Interface Status
Vlan101        forward-enabled protocol-up/link-up/admin-up
Vlan1000       4.2.2.1         protocol-up/link-up/admin-up
Vlan1001       4.1.1.1         protocol-up/link-up/admin-up
leaf1#

leaf1# show ip arp vrf vxlan-900001
Flags: * - Adjacencies learnt on non-active FHRP router
+ - Adjacencies syncoed via CFSOE
# - Adjacencies Throttled for Glean
D - Static Adjacencies attached to down interface

IP ARP Table for context vxlan-900001
Total number of entries: 2
Address      Age      MAC Address      Interface
4.1.1.10     00:03:56  0035.1ac1.37c3  Vlan1001
4.2.2.10     00:13:10  0035.1ac1.37c2  Vlan1000
leaf1#

leaf1# show ip route vrf vxlan-900001
IP Route Table for VRF "vxlan-900001"
''' denotes best ucast next-hop
''' denotes best mcast next-hop
'[x/y]' denotes [preference/metric]
'%<string>' in via output denotes VRF <string>
4.2.2.100/32, ubest/mbest: 1/0
   via 10.111.111.2&defaul
pls-vpni)segid 900001 tunnel

leaf1# traceroute 10.111.111.2
traceroute to 10.111.111.2:
 1 172.16.1.1 (172.16.1.1)
 2 10.111.111.2 (10.111.111.2)
leaf1#

leaf1# show l2route evpn mac
Mac Address      Prod Host IP
-----
0035.1ac1.37c2 HMM 4.2.2.10
00c8.8bf9.5f41 BGP 4.2.2.10
e0d1.73a4.1d41 BGP 4.2.2.11
leaf1#

leaf1# show nve internal bgp
VNI      Peer-IP      Pe
900001 10.111.111.2 0
200100110.111.111.2 0
200100210.111.111.2 0
leaf1#
```

## Leaf-1 MAC Address Verification

```
leaf1# sh mac address-table vlan 1000
Legend:
  * - primary entry, G - Gateway MAC, (R) - Routed MAC, O - Overlay MAC
  age - seconds since last seen,+ - primary entry using vPC Peer-Link
  VLAN    MAC Address      Type    age    Secure NTFY  Ports/SWID.SSID.LIID
-----
* 1000    0000.2222.3333      static  0      F F sup-eth2
* 1000    0035.lac1.37c2      dynamic 730    F F Eth1/23
* 1000    005d.738e.a337      static  0      F F nve1/10.111.111.2
* 1000    00c8.8bf9.5f41      dynamic 0      F F nve1/10.111.111.2
* 1000    6cb2.ae91.38bf      static  0      F F nve1/10.200.200.22
* 1000    e0d1.73a4.1d41      dynamic 0      F F nve1/192.168.1.4
leaf1#

leaf1# sh system internal l2rib event-history mac | i 0035.lac1.37c2
[04/24/20 13:10:09.721 UTC 3 4173] Received MAC ROUTE msg: addr: (1000-0035.lac1.37c2) vni: 0 admin_dist: 0 seq_num: 0 rt_flags: L soo: 0 dg_co
[04/24/20 13:10:09.721 UTC 6 4173] (1000,0035.lac1.37c2,3):MAC route created with seq num:0, flags:L (), soo:0, peerid:0
[04/24/20 13:10:09.732 UTC c 4173] (1000,0035.lac1.37c2,3):Encoding MAC best route (ADD, client id 4)
[04/24/20 13:10:09.871 UTC e 4173] (1000,0035.lac1.37c2):Bound MAC-IP(4.2.2.10) to MAC, Total MAC-IP linked: 1

leaf1# show system internal l2rib event-history mac | i 0035.lac1.37c3
[04/24/20 13:10:09.721 UTC 8 4173] Received MAC ROUTE msg: addr: (1001-0035.lac1.37c3) vni: 0 admin_dist: 0 seq_num: 0 rt_flags: L soo: 0 dg_co
[04/24/20 13:10:09.721 UTC b 4173] (1001,0035.lac1.37c3,3):MAC route created with seq num:0, flags:L (), soo:0, peerid:0
[04/24/20 13:10:09.732 UTC d 4173] (1001,0035.lac1.37c3,3):Encoding MAC best route (ADD, client id 4)
[04/24/20 13:10:09.871 UTC f 4173] (1001,0035.lac1.37c3):Bound MAC-IP(4.1.1.10) to MAC, Total MAC-IP linked: 1

leaf1# sh system internal l2rib event-history mac-ip | i 0035.lac1.37c2
[04/24/20 13:10:09.871 UTC 2 4173] Received MAC-IP ROUTE msg: addr: (1000-0035.lac1.37c2) host ip: 4.2.2.10 vni: 0 L3 info: 900001 rt_flags:
[04/24/20 13:10:09.871 UTC 3 4173] (1000,0035.lac1.37c2,4.2.2.10):MAC-IP entry created
[04/24/20 13:10:09.871 UTC 4 4173] (1000,0035.lac1.37c2,4.2.2.10,12):MAC-IP route created with flags 0, L3 vrf 900001, seq 0, admin dist 7, soo 0
[04/24/20 13:10:09.882 UTC 9 4173] (1000,0035.lac1.37c2,4.2.2.10,12):Encoding MAC-IP best route (ADD, client id 4)
leaf1#

leaf1# show system internal l2rib event-history mac-ip | i 0035.lac1.37c3
[04/24/20 13:10:09.871 UTC 6 4173] Received MAC-IP ROUTE msg: addr: (1001-0035.lac1.37c3) host ip: 4.1.1.10 vni: 0 L3 info: 900001 rt_flags:
[04/24/20 13:10:09.871 UTC 7 4173] (1001,0035.lac1.37c3,4.1.1.10):MAC-IP entry created
[04/24/20 13:10:09.871 UTC 8 4173] (1001,0035.lac1.37c3,4.1.1.10,12):MAC-IP route created with flags 0, L3 vrf 900001, seq 0, admin dist 7, soo 0
[04/24/20 13:10:09.882 UTC a 4173] (1001,0035.lac1.37c3,4.1.1.10,12):Encoding MAC-IP best route (ADD, client id 4)
leaf1#
```

## Troubleshoot

In order to troubleshoot, refer to [Troubleshoot EVPN/VxLAN in Multisite Environment](#)

## Related Information

- [VXLAN EVPN Multi-Site Design and Deployment White Paper](#)
- [Configuring VXLAN EVPN Multi-Site](#)