

# Configuration d'une sauvegarde RNIS avec des routes statiques flottantes

## Contenu

[Introduction](#)

[Conditions préalables](#)

[Conditions requises](#)

[Components Used](#)

[Conventions](#)

[Configuration](#)

[Diagramme du réseau](#)

[Configurations](#)

[Vérification](#)

[Dépannage](#)

[Dépannage des commandes](#)

[Exemple de résultat de dépannage](#)

[Informations connexes](#)

## [Introduction](#)

Ce document fournit un exemple de configuration pour la mise en oeuvre d'une sauvegarde RNIS avec des routes statiques flottantes, et fournit des informations de dépannage de base pour ce type de configuration.

Pour plus d'informations sur les mises en oeuvre les plus courantes de la sauvegarde RNIS et les comparaisons entre elles, reportez-vous au document suivant : [Évaluation des interfaces de secours, routes statiques flottantes et Dialer Watch pour DDR de secours.](#)

## [Conditions préalables](#)

### [Conditions requises](#)

Aucune spécification déterminée n'est requise pour ce document.

### [Components Used](#)

Les informations dans ce document sont basées sur les versions de logiciel et de matériel ci-dessous.

- Deux routeurs Cisco 2500 exécutant les versions 12.2(3) et 12.2(5) du logiciel Cisco IOS®
- Les informations présentées dans ce document ont été créées à partir de périphériques dans un

environnement de laboratoire spécifique. All of the devices used in this document started with a cleared (default) configuration. Si vous travaillez dans un réseau opérationnel, assurez-vous de bien comprendre l'impact potentiel de toute commande avant de l'utiliser.

## Conventions

Pour plus d'informations sur les conventions des documents, référez-vous aux [Conventions utilisées pour les conseils techniques de Cisco](#).


## Configuration

Cette section vous fournit des informations pour configurer les fonctionnalités décrites dans ce document.

**Remarque :** Pour en savoir plus sur les commandes utilisées dans le présent document, utilisez [l'outil de recherche de commandes](#) (clients [inscrits](#) seulement).

## Diagramme du réseau

Ce document utilise la configuration réseau indiquée dans le diagramme suivant :

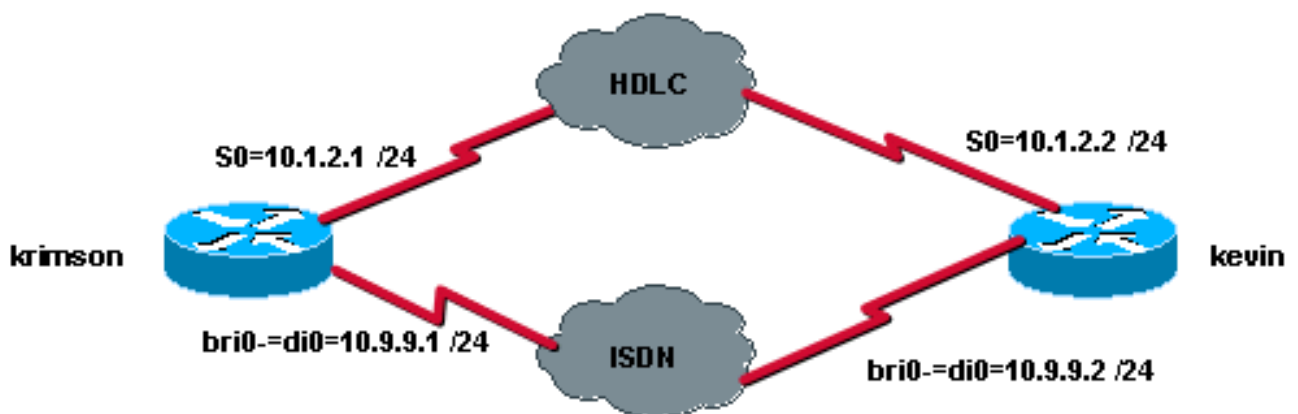

## Configurations

Ce document utilise les configurations présentées ci-dessous.

- [krimson \(routeur Cisco 2500\)](#)
- [kevin \(routeur Cisco 2500\)](#)

### **krimson (routeur Cisco 2500)**

```
krimson#show running-config
Building configuration...

!
version 12.2
service timestamps debug datetime msec
service timestamps log datetime msec
!
```

```
hostname krimson
!
username kevin password 0 <password>
!
!
isdn switch-type basic-net3
!
!
interface Loopback0
ip address 10.7.7.1 255.255.255.0
!
interface Serial0
ip address 10.1.2.1 255.255.255.0
!
interface BRI0
no ip address
encapsulation ppp
no ip route-cache
no ip mroute-cache
load-interval 30
dialer pool-member 1
isdn switch-type basic-net3
no fair-queue
no cdp enable
ppp authentication chap
!
interface Dialer0
ip address 10.9.9.1 255.255.255.0
encapsulation ppp
no ip route-cache
no ip mroute-cache
dialer pool 1
dialer remote-name kevin

dialer string 8114
dialer-group 1
no cdp enable
ppp authentication chap
!
ip classless
ip route 10.8.8.0 255.255.255.0 10.1.2.2
ip route 10.8.8.0 255.255.255.0 10.9.9.2 180
no ip http server
!
dialer-list 1 protocol ip permit
!
!
line con 0
exec-timeout 0 0
line aux 0
line vty 0 4
exec-timeout 0 0
password <password> login
!
end
```

### kevin (routeur Cisco 2500)

```
kevin#show running-config
Building configuration...

Current configuration : 1205 bytes
!
```

```
version 12.2
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname kevin
!
username krimson password 0 <password>
!
isdn switch-type basic-net3
!
!
!
interface Loopback0
ip address 10.8.8.1 255.255.255.0
!
interface Serial0
ip address 10.1.2.2 255.255.255.0
clockrate 2000000
!
interface Serial1
no ip address
shutdown
!
interface BRI0
no ip address
encapsulation ppp
dialer pool-member 1
isdn switch-type basic-net3
no cdp enable
ppp authentication chap
!
interface Dialer0
ip address 10.9.9.2 255.255.255.0
encapsulation ppp
dialer pool 1
dialer remote-name krimson
dialer string 8113
dialer-group 1
no cdp enable
ppp authentication chap
!
!
dialer-list 1 protocol ip permit
!
!
line con 0
exec-timeout 0 0
line aux 0
line vty 0 4
exec-timeout 0 0
password <password> login
!
end
```

## Vérification

Cette section présente des informations que vous pouvez utiliser pour vous assurer que votre configuration fonctionne correctement.

Certaines commandes **show** sont prises en charge par l'[Output Interpreter Tool](#) (clients

enregistrés uniquement), qui vous permet de voir une analyse de la sortie de la commande show.

- **show ip route** - Affiche les entrées de la table de routage IP.
- **show interfaces** - Affiche des statistiques pour toutes les interfaces configurées sur le routeur ou le serveur d'accès.

## Dépannage

Cette section fournit des informations que vous pouvez utiliser pour dépanner votre configuration.

### Dépannage des commandes

Certaines commandes **show** sont prises en charge par l'[Output Interpreter Tool](#) (clients enregistrés uniquement), qui vous permet de voir une analyse de la sortie de la commande show.

**Note** : Avant d'émettre des commandes **debug**, consultez [Informations importantes sur les commandes de débogage](#).

- **debug isdn q931** - Affiche des informations sur la configuration des appels et la suppression des connexions réseau RNIS (couche 3) entre le routeur local (côté utilisateur) et le réseau.
- **debug isdn events** - Affiche les événements RNIS qui se produisent du côté utilisateur (sur le routeur) de l'interface RNIS. Les événements RNIS qui peuvent être affichés sont les événements Q.931 (configuration d'appels et désactivation des connexions réseau RNIS).
- **debug dialer** - Affiche des informations de débogage sur les paquets ou les événements d'une interface de numérotation.
- **debug ppp negotiation** - Entraîne la commande **debug ppp** à afficher les paquets PPP transmis au démarrage du protocole PPP, où les options PPP sont négociées.
- **debug ppp authentication** - Permet à la commande **debug ppp** d'afficher les messages de protocole d'authentification, y compris les échanges de paquets CHAP (Challenge Authentication Protocol) et les échanges PAP (Password Authentication Protocol).

### Exemple de résultat de dépannage

Ici, nous pouvons tester la fonctionnalité de sauvegarde en utilisant les commandes **shutdown** et **no shutdown** sur l'interface série du côté distant. Ceci conduit par conséquent à la disparition de la route ip principale vers le réseau de destination en question.

Examinons d'abord l'état initial de l'interface principale et de la table de routage IP :

#### Côté appelant :

```
krimson#show interface serial 0
Serial0 is up, line protocol is up
Hardware is HD64570
Internet address is 10.1.2.1/24
MTU 1500 bytes, BW 1544 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation HDLC, loopback not set
Keepalive set (10 sec)
```

```
Last input 00:00:07, output 00:00:07, output hang never
Last clearing of "show interface" counters never
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/256 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 1158 kilobits/sec
5 minute input rate 1000 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
92 packets input, 7599 bytes, 0 no buffer
Received 62 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
99 packets output, 8991 bytes, 0 underruns
0 output errors, 0 collisions, 12 interface resets
0 output buffer failures, 0 output buffers swapped out
4 carrier transitions
DCD=up DSR=up DTR=up RTS=up CTS=up
```

#### krimson#show ip route

```
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
```

Gateway of last resort is 10.48.74.1 to network 0.0.0.0

```
10.0.0.0/8 is variably subnetted, 5 subnets, 2 masks
C 10.1.2.0/24 is directly connected, Serial0
S 10.8.8.0/24 [1/0] via 10.1.2.2
```

*!--- The IP route for the destination network points to the primary link.* C 10.9.9.0/24 is directly connected, Dialer0 C 10.7.7.0/24 is directly connected, Loopback0 C 10.48.74.0/23 is directly connected, Ethernet0 S\* 0.0.0.0/0 [254/0] via 10.48.74.1

#### Côté apelé :

#### kevin#show interface serial 0

```
Serial0 is up, line protocol is up
Hardware is HD64570
Internet address is 10.1.2.2/24
MTU 1500 bytes, BW 1544 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation HDLC, loopback not set
Keepalive set (10 sec)
Last input 00:00:00, output 00:00:08, output hang never
Last clearing of "show interface" counters never
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/256 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 1158 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
106 packets input, 9432 bytes, 0 no buffer
Received 71 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
98 packets output, 8016 bytes, 0 underruns
0 output errors, 0 collisions, 4 interface resets
```

```
0 output buffer failures, 0 output buffers swapped out
1 carrier transitions
DCD=up DSR=up DTR=up RTS=up CTS=up
```

```
kevin#show ip route
```

```
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
```

```
Gateway of last resort is 10.48.74.1 to network 0.0.0.0
```

```
10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C 10.1.2.0/24 is directly connected, Serial0
C 10.9.9.0/24 is directly connected, Dialer0
C 10.8.8.0/24 is directly connected, Loopback0
C 10.48.74.0/23 is directly connected, Ethernet0
S* 0.0.0.0/0 [254/0] via 10.48.74.1
kevin#
```

Maintenant, nous pouvons simuler la défaillance de liaison en utilisant la commande **shutdown** sur l'interface série distante :

```
krimson#
```

```
*Mar 4 15:25:18.302: %LINK-3-UPDOWN: Interface Serial0, changed state to
down
*Mar 4 15:25:19.302: %LINEPROTO-5-UPDOWN: Line protocol on Interface
Serial0, changed state to down
```

Nous pouvons voir ici que la liaison principale a été interrompue.

```
krimson#show interface serial 0
```

```
Serial0 is down, line protocol is down
Hardware is HD64570
Internet address is 10.1.2.1/24
MTU 1500 bytes, BW 1544 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation HDLC, loopback not set
Keepalive set (10 sec)
Last input 00:00:22, output 00:00:32, output hang never
Last clearing of "show interface" counters never
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/256 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 1158 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
108 packets input, 8526 bytes, 0 no buffer
Received 78 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
114 packets output, 9895 bytes, 0 underruns
0 output errors, 0 collisions, 12 interface resets
0 output buffer failures, 0 output buffers swapped out
5 carrier transitions
DCD=down DSR=down DTR=up RTS=up CTS=down
krimson#
```

Les détails de la table de routage indiquent maintenant que la route statique flottante est installée dans la table de routage :

```
krimson#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route

Gateway of last resort is 10.48.74.1 to network 0.0.0.0

10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
S 10.8.8.0/24 [180/0] via 10.9.9.2
C 10.9.9.0/24 is directly connected, Dialer0
C 10.7.7.0/24 is directly connected, Loopback0
C 10.48.74.0/23 is directly connected, Ethernet0
S* 0.0.0.0/0 [254/0] via 10.48.74.1
krimson#
```

Sur le routeur appelé, nous pouvons simuler la défaillance de liaison principale simulée à l'aide de la commande **shutdown** sur l'interface série 0 locale :

```
kevin#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
kevin(config)#interface serial 0
kevin(config-if)#shutdown

*Mar 4 15:32:00.250: %LINK-5-CHANGED: Interface Serial0, changed state to
administratively down
*Mar 4 15:32:01.250: %LINEPROTO-5-UPDOWN: Line protocol on Interface
Serial0, changed state to down
*Mar 4 15:32:03.742: %SYS-5-CONFIG_I: Configured from console by console
```

Maintenant, nous pouvons voir que la liaison principale tombe en panne :

```
kevin#show interface serial 0
Serial0 is administratively down, line protocol is down
Hardware is HD64570
Internet address is 10.1.2.2/24
MTU 1500 bytes, BW 1544 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation HDLC, loopback not set
Keepalive set (10 sec)
Last input 00:01:28, output 00:01:18, output hang never
Last clearing of "show interface" counters never
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/256 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 1158 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
114 packets input, 9895 bytes, 0 no buffer
Received 79 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
```



108 packets output, 8526 bytes, 0 underruns  
0 output errors, 0 collisions, 4 interface resets  
0 output buffer failures, 0 output buffers swapped out  
1 carrier transitions  
DCD=down DSR=down DTR=up RTS=up CTS=down

Le trafic ping défini comme trafic intéressant initie l'appel sortant via l'interface de numérotation de secours 0.

krimson#ping 10.8.8.1

Type escape sequence to abort.

Sending 5, 100-byte ICMP Echos to 10.8.8.1, timeout is 2 seconds:

```
*Mar 4 15:27:39.618: BR0 DDR: rotor dialout [priority]
*Mar 4 15:27:39.622: BR0 DDR: Dialing cause ip (s=10.9.9.1, d=10.8.8.1)
*Mar 4 15:27:39.626: BR0 DDR: Attempting to dial 8114
*Mar 4 15:27:39.642: ISDN BR0: TX -> SETUP pd = 8 callref = 0x09
*Mar 4 15:27:39.646: Bearer Capability i = 0x8890
*Mar 4 15:27:39.654: Channel ID i = 0x83
*Mar 4 15:27:39.658: Called Party Number i = 0x80, '8114',
Plan:Unknown, Type:Unknown
*Mar 4 15:27:39.718: ISDN BR0: RX <- CALL_PROC pd = 8 callref = 0x89
*Mar 4 15:27:39.722: Channel ID i = 0x89
*Mar 4 15:27:39.974: ISDN BR0: RX <- CONNECT pd = 8 callref = 0x89
*Mar 4 15:27:39.990: %LINK-3-UPDOWN: Interface BRI0:1, changed state to up
*Mar 4 15:27:39.998: %DIALER-6-BIND: Interface BR0:1 bound to profile Di0
*Mar 4 15:27:40.010: BR0:1 PPP: Treating connection as a callout
*Mar 4 15:27:40.010: BR0:1 PPP: Phase is ESTABLISHING, Active Open [0 sess, 0 load]
*Mar 4 15:27:40.014: BR0:1 LCP: O !!!CONFREQ [Closed] id 19 len 15
*Mar 4 15:27:40.018: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:27:40.022: BR0:1 LCP: MagicNumber 0x12D0A490 (0x050612D0A490)
*Mar 4 15:27:40.030: ISDN BR0: TX -> CONNECT_ACK pd = 8 callref = 0x09
*Mar 4 15:27:40.054: BR0:1 LCP: I CONFREQ [REQsent] id 9 len 15
*Mar 4 15:27:40.058: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:27:40.062: BR0:1 LCP: MagicNumber 0x12D6B638 (0x050612D6B638)
*Mar 4 15:27:40.066: BR0:1 LCP: O CONFACK [REQsent] id 9 len 15
*Mar 4 15:27:40.066: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:27:40.070: BR0:1 LCP: MagicNumber 0x12D6B638 (0x050612D6B638)
*Mar 4 15:27:40.074: BR0:1 LCP: I CONFACK [ACKsent] id 19 len 15
*Mar 4 15:27:40.078: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:27:40.082: BR0:1 LCP: MagicNumber 0x12D0A490 (0x050612D0A490)
*Mar 4 15:27:40.082: BR0:1 LCP: State is Open
*Mar 4 15:27:40.086: BR0:1 PPP: Phase is AUTHENTICATING, by both [0 sess, 0 load]
*Mar 4 !
Suc15:27:40.090: BR0:1 CHAP: O CHALLENGE id 7 len 28 from "krimson"
*Mar 4 15:27:40.106: BR0:1 CHAP: I CHALLENGE id 7 len 26 from "kevin"
*Mar 4 15:27:40.110: BR0:1 CHAP: O RESPONSE id 7 len 28 from "krimson"
*Mar 4 15:27:40.138: BR0:1 CHAP: I SUCCESS id 7 len 4
*Mar 4 15:27:40.150: BR0:1 CHAP: I RESPONSE id 7 len 26 from "kevin"
*Mar 4 15:27:40.158: BR0:1 CHAP: O SUCCESS id 7 len 4
*Mar 4 15:27:40.162: BR0:1 PPP: Phase is UP [0 sess, 0 load]
*Mar 4 15:27:40.166: BR0:1 IPCP: O CONFREQ [Not negotiated] id 2 len 10
*Mar 4 15:27:40.170: BR0:1 IPCP: Address 10.9.9.1 (0x03060A090901)
*Mar 4 15:27:40.186: BR0:1 IPCP: I CONFREQ [REQsent] id 2 len 10
*Mar 4 15:27:40.190: BR0:1 IPCP: Address 10.9.9.2 (0x03060A090902)
*Mar 4 15:27:40.190: BR0:1 IPCP: O CONFACK [REQsent] id 2 len 10
*Mar 4 15:27:40.194: BR0:1 IPCP: Address 10.9.9.2 (0x03060A090902)
*Mar 4 15:27:40.202: BR0:1 IPCP: I CONFACK [ACKsent] id 2 len 10
*Mar 4 15:27:40.206: BR0:1 IPCP: Address 10.9.9.1 (0x03060A090901)
*Mar 4 15:27:40.206: BR0:1 IPCP: State is Open
*Mar 4 15:27:40.214: BR0:1 DDR: dialer protocol up
*Mar 4 15:27:40.218: Di0 IPCP: Install route to 10.9.9.2
```

```
*Mar 4 15:27:41.162: %LINEPROTO-5-UPDOWN: Line protocol on Interface BRI0:1,
changed state to upccess rate is 80 percent (4/5), round-trip min/avg/max =
36/47/76 ms
krimson#
```

En même temps, les **débugages** exécutés sur le côté appelé affichent le résultat suivant pour ce même appel :

```
kevin#
*Mar 4 15:34:21.698: ISDN BR0: RX <- SETUP pd = 8 callref = 0x07
*Mar 4 15:34:21.706: Bearer Capability i = 0x8890
*Mar 4 15:34:21.714: Channel ID i = 0x89
*Mar 4 15:34:21.718: Calling Party Number i = 0xA1, '8113',
Plan:ISDN, Type:National
*Mar 4 15:34:21.734: Called Party Number i = 0xC1, '8114',
Plan:ISDN, Type:Subscriber(local)
*Mar 4 15:34:21.762: ISDN BR0: Event: Received a DATA call from 8113 on B1
at 64 Kb/s
*Mar 4 15:34:21.762: ISDN BR0: Event: Accepting the call id 0xC
*Mar 4 15:34:21.766: BR0:1: interface must be fifo queue, force fifo
*Mar 4 15:34:21.774: %DIALER-6-BIND: Interface BR0:1 bound to profile Di0
*Mar 4 15:34:21.786: %LINK-3-UPDOWN: Interface BRI0:1, changed state to up
*Mar 4 15:34:21.798: BR0:1 PPP: Treating connection as a callin
*Mar 4 15:34:21.802: BR0:1 PPP: Phase is ESTABLISHING, Passive Open [0 sess,
0 load]
*Mar 4 15:34:21.806: BR0:1 LCP: State is Listen
*Mar 4 15:34:21.818: ISDN BR0: TX -> CALL_PROC pd = 8 callref = 0x87
*Mar 4 15:34:21.826: Channel ID i = 0x89
*Mar 4 15:34:21.854: ISDN BR0: TX -> CONNECT pd = 8 callref = 0x87
*Mar 4 15:34:21.918: ISDN BR0: RX <- CONNECT_ACK pd = 8 callref = 0x07
*Mar 4 15:34:21.926: Channel ID i = 0x89
*Mar 4 15:34:21.978: BR0:1 LCP: I CONFREQ [Listen] id 19 len 15
*Mar 4 15:34:21.982: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:34:21.986: BR0:1 LCP: MagicNumber 0x12D0A490 (0x050612D0A490)
*Mar 4 15:34:21.990: BR0:1 LCP: O CONFREQ [Listen] id 9 len 15
*Mar 4 15:34:21.994: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:34:21.994: BR0:1 LCP: MagicNumber 0x12D6B638 (0x050612D6B638)
*Mar 4 15:34:21.998: BR0:1 LCP: O CONFACK [Listen] id 19 len 15
*Mar 4 15:34:22.002: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:34:22.006: BR0:1 LCP: MagicNumber 0x12D0A490 (0x050612D0A490)
*Mar 4 15:34:22.030: BR0:1 LCP: I CONFACK [ACKsent] id 9 len 15
*Mar 4 15:34:22.034: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:34:22.034: BR0:1 LCP: MagicNumber 0x12D6B638 (0x050612D6B638)
*Mar 4 15:34:22.038: BR0:1 LCP: State is Open
*Mar 4 15:34:22.042: BR0:1 PPP: Phase is AUTHENTICATING, by both [0 sess, 0
load]
*Mar 4 15:34:22.046: BR0:1 CHAP: O CHALLENGE id 7 len 26 from "kevin"
*Mar 4 15:34:22.050: BR0:1 CHAP: I CHALLENGE id 7 len 28 from "krimson"
*Mar 4 15:34:22.054: BR0:1 CHAP: Waiting for peer to authenticate first
*Mar 4 15:34:22.070: BR0:1 CHAP: I RESPONSE id 7 len 28 from "krimson"
*Mar 4 15:34:22.078: BR0:1 CHAP: O SUCCESS id 7 len 4
*Mar 4 15:34:22.082: BR0:1 CHAP: Processing saved Challenge, id 7
*Mar 4 15:34:22.090: BR0:1 CHAP: O RESPONSE id 7 len 26 from "kevin"
*Mar 4 15:34:22.114: BR0:1 CHAP: I SUCCESS id 7 len 4
*Mar 4 15:34:22.118: BR0:1 PPP: Phase is UP [0 sess, 0 load]
*Mar 4 15:34:22.122: BR0:1 IPCP: O CONFREQ [Not negotiated] id 2 len 10
*Mar 4 15:34:22.126: BR0:1 IPCP: Address 10.9.9.2 (0x03060A090902)
*Mar 4 15:34:22.130: BR0:1 IPCP: I CONFREQ [REQsent] id 2 len 10
*Mar 4 15:34:22.134: BR0:1 IPCP: Address 10.9.9.1 (0x03060A090901)
*Mar 4 15:34:22.138: BR0:1 IPCP: O CONFACK [REQsent] id 2 len 10
*Mar 4 15:34:22.142: BR0:1 IPCP: Address 10.9.9.1 (0x03060A090901)
*Mar 4 15:34:22.226: BR0:1 IPCP: I CONFACK [ACKsent] id 2 len 10
*Mar 4 15:34:22.230: BR0:1 IPCP: Address 10.9.9.2 (0x03060A090902)
```

```
*Mar 4 15:34:22.230: BR0:1 IPCP: State is Open
*Mar 4 15:34:22.242: BR0:1 DDR: dialer protocol up
*Mar 4 15:34:22.250: Di0 IPCP: Install route to 10.9.9.1
*Mar 4 15:34:23.114: %LINEPROTO-5-UPDOWN: Line protocol on Interface BRI0:1,
changed state to up
*Mar 4 15:34:27.794: %ISDN-6-CONNECT: Interface BRI0:1 is now connected to
8113 krimson
```

L'état après la sauvegarde est « up » :

```
krimson#show interface dialer 0
Dialer0 is up, line protocol is up (spoofing)
Hardware is Unknown
Internet address is 10.9.9.1/24
MTU 1500 bytes, BW 56 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
DTR is pulsed for 1 seconds on reset
Interface is bound to BR0:1
Last input never, output never, output hang never
Last clearing of "show interface" counters 00:13:26
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/16 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 42 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
36 packets input, 2160 bytes
36 packets output, 2160 bytes
Bound to:
BRI0:1 is up, line protocol is up
Hardware is BRI
MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
Keepalive set (10 sec)
Time to interface disconnect: idle 00:01:33
Interface is bound to Di0 (Encapsulation PPP)
LCP Open
Open: IPCP
Last input 00:00:26, output 00:00:01, output hang never
Last clearing of "show interface" counters never
Queueing strategy: fifo
Output queue 0/40, 0 drops; input queue 0/75, 0 drops
30 second input rate 0 bits/sec, 0 packets/sec
30 second output rate 0 bits/sec, 0 packets/sec
126 packets input, 3664 bytes, 0 no buffer
Received 0 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
131 packets output, 3777 bytes, 0 underruns
0 output errors, 0 collisions, 15 interface resets
0 output buffer failures, 0 output buffers swapped out
28 carrier transitions

krimson#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
```

\* - candidate default, U - per-user static route, o - ODR  
P - periodic downloaded static route

Gateway of last resort is 10.48.74.1 to network 0.0.0.0

10.0.0.0/8 is variably subnetted, 5 subnets, 3 masks  
C 10.9.9.2/32 is directly connected, Dialer0  
S 10.8.8.0/24 [180/0] via 10.9.9.2  
C 10.9.9.0/24 is directly connected, Dialer0  
C 10.7.7.0/24 is directly connected, Loopback0  
C 10.48.74.0/23 is directly connected, Ethernet0  
S\* 0.0.0.0/0 [254/0] via 10.48.74.1

## Sur le côté appelé :

L'état après la sauvegarde est « up ».

```
kevin#show interface dialer 0
Dialer0 is up, line protocol is up (spoofing)
Hardware is Unknown
Internet address is 10.9.9.2/24
MTU 1500 bytes, BW 56 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
DTR is pulsed for 1 seconds on reset
Interface is bound to BR0:1
Last input never, output never, output hang never
Last clearing of "show interface" counters 00:16:18
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/16 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 42 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
40 packets input, 2224 bytes
40 packets output, 2224 bytes
Bound to:
BRI0:1 is up, line protocol is up
Hardware is BRI
MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
Keepalive set (10 sec)
Time to interface disconnect: idle 00:01:11
Interface is bound to Di0 (Encapsulation PPP)
LCP Open
Open: IPCP
Last input 00:00:48, output 00:00:00, output hang never
Last clearing of "show interface" counters never
Queueing strategy: fifo
Output queue 0/40, 0 drops; input queue 0/75, 0 drops
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
136 packets input, 3857 bytes, 0 no buffer
Received 0 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
131 packets output, 3744 bytes, 0 underruns
0 output errors, 0 collisions, 12 interface resets
0 output buffer failures, 0 output buffers swapped out
35 carrier transitions
```

kevin#show ip route

Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP  
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter  
area  
\* - candidate default, U - per-user static route, o - ODR  
P - periodic downloaded static route

Gateway of last resort is 10.48.74.1 to network 0.0.0.0

10.0.0.0/8 is variably subnetted, 4 subnets, 3 masks  
C 10.9.9.0/24 is directly connected, Dialer0  
C 10.8.8.0/24 is directly connected, Loopback0  
C 10.9.9.1/32 is directly connected, Dialer0  
C 10.48.74.0/23 is directly connected, Ethernet0  
S\* 0.0.0.0/0 [254/0] via 10.48.74.1

Ici, nous simulons la récupération de la liaison principale à l'aide de la commande **no shutdown** sur l'interface série distante :

krimson#

\*Mar 4 15:28:58.726: %LINK-3-UPDOWN: Interface Serial0, changed state to up  
\*Mar 4 15:28:59.730: %LINEPROTO-5-UPDOWN: Line protocol on Interface  
Serial0, changed state to up

La sauvegarde est déconnectée après le délai d'inactivité.

krimson#show isdn active

-----  
ISDN ACTIVE CALLS  
-----

-----  
Call Calling Called Remote Seconds Seconds Seconds Charges  
Type Number Number Name Used Left Idle  
Units/Currency  
-----

Out 8114 kevin 120 1 118 0  
-----

krimson#

\*Mar 4 15:29:41.738: BR0:1 DDR: idle timeout  
\*Mar 4 15:29:41.742: BR0 DDR: has total 0 call(s), dial\_out 0, dial\_in 0  
\*Mar 4 15:29:41.746: BR0:1 PPP: Treating connection as a callout  
\*Mar 4 15:29:41.750: %DIALER-6-UNBIND: Interface BR0:1 unbound from profile  
Di0  
\*Mar 4 15:29:41.754: BR0:1 DDR: disconnecting call  
\*Mar 4 15:29:41.758: %ISDN-6-DISCONNECT: Interface BRI0:1 disconnected from  
8114 kevin, call lasted 121 seconds  
\*Mar 4 15:29:41.774: ISDN BR0: TX -> DISCONNECT pd = 8 callref = 0x09  
\*Mar 4 15:29:41.782: Cause i = 0x8090 - Normal call clearing  
\*Mar 4 15:29:41.790: Di0 IPCP: Remove route to 10.9.9.2  
\*Mar 4 15:29:41.862: ISDN BR0: RX <- RELEASE pd = 8 callref = 0x89  
\*Mar 4 15:29:41.886: %LINK-3-UPDOWN: Interface BRI0:1, changed state to down  
\*Mar 4 15:29:41.894: BR0:1 IPCP: State is Closed  
\*Mar 4 15:29:41.894: BR0:1 PPP: Phase is TERMINATING [0 sess, 0 load]  
\*Mar 4 15:29:41.898: BR0:1 LCP: State is Closed  
\*Mar 4 15:29:41.898: BR0:1 PPP: Phase is DOWN [0 sess, 0 load]

```
*Mar 4 15:29:41.902: BR0:1 DDR: disconnecting call
*Mar 4 15:29:41.910: ISDN BR0: TX -> RELEASE_COMP pd = 8 callref = 0x09
*Mar 4 15:29:42.886: %LINEPROTO-5-UPDOWN: Line protocol on Interface BRI0:1,
changed state to down
```

L'état initial est maintenant restauré.

```
krimson#show ip route
```

```
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
```

```
Gateway of last resort is 10.48.74.1 to network 0.0.0.0
```

```
10.0.0.0/8 is variably subnetted, 5 subnets, 2 masks
C 10.1.2.0/24 is directly connected, Serial0
S 10.8.8.0/24 [1/0] via 10.1.2.2
C 10.9.9.0/24 is directly connected, Dialer0
C 10.7.7.0/24 is directly connected, Loopback0
C 10.48.74.0/23 is directly connected, Ethernet0
S* 0.0.0.0/0 [254/0] via 10.48.74.1
```

## [Informations connexes](#)

- [Pages d'assistance sur la technologie de numérotation](#)
- [Support technique - Cisco Systems](#)