

Configuration d'IPSec entre un routeur Cisco IOS et un client VPN Cisco 4.x pour Windows à l'aide de RADIUS pour l'authentification d'utilisateur

Contenu

[Introduction](#)

[Conditions préalables](#)

[Conditions requises](#)

[Components Used](#)

[Conventions](#)

[Configuration](#)

[Diagramme du réseau](#)

[Configuration du routeur 2621XM](#)

[Configuration du serveur RADIUS](#)

[Configurer le serveur RADIUS pour l'authentification des utilisateurs](#)

[Configuration VPN Client 4.8](#)

[Activation de la transmission tunnel partagée](#)

[Configuration de la fonction de secours du serveur RADIUS](#)

[Vérification](#)

[Dépannage](#)

[Dépannage des commandes](#)

[Sortie de débogage](#)

[Informations connexes](#)

[Introduction](#)

Ce document explique comment configurer une connexion entre un routeur et le client VPN Cisco 4.x en utilisant le Remote Authentication Dial-In User Service (RADIUS) pour l'authentification de l'utilisateur. Les versions 12.2(8)T et ultérieures du logiciel Cisco IOS® prennent en charge les connexions du client VPN Cisco 4.x. Les clients VPN 3.x et 4.x utilisent la stratégie du groupe 2 de Diffie Hellman (DH). La commande « isakmp policy # group 2 » active les clients VPN à connecter.

Ce document montre l'authentification sur le serveur RADIUS, et l'autorisation (par exemple l'attribution locale du service WINS (Windows Internet Naming Service) et du service DNS (Domain Naming Service) par le routeur. Si vous souhaitez effectuer l'authentification et l'autorisation via le serveur RADIUS, référez-vous à [Configuration d'IPSec entre un routeur Cisco IOS et un client VPN Cisco 4.x pour Windows utilisant RADIUS](#).

Remarque : IPsec VPN Accounting est désormais disponible. Référez-vous à [Comptabilité VPN IPsec](#) pour plus d'informations et des exemples de configuration.

Référez-vous à [Exemple de configuration du tunnel IPsec entre le routeur IOS et le client VPN Cisco 4.x pour Windows avec l'authentification utilisateur TACACS+](#) pour plus d'informations sur le scénario où l'authentification utilisateur se produit en externe avec le protocole TACACS+.

Référez-vous à [Configuration du client VPN Cisco 3.x pour Windows à IOS à l'aide de l'authentification étendue locale](#) pour plus d'informations sur le scénario où l'authentification de l'utilisateur se produit localement dans le routeur Cisco IOS.

Référez-vous à [Exemple de configuration d'authentification PIX/ASA 7.x et Cisco VPN Client 4.x pour Windows avec Microsoft Windows 2003 IAS RADIUS](#) pour plus d'informations sur la configuration de la connexion VPN d'accès à distance entre un client VPN Cisco (4.x pour Windows) et le dispositif de sécurité de la gamme PIX 500 7.x à l'aide d'un service d'authentification Internet Microsoft Windows 2003 serveur.

Référez-vous à [Configuration de mode avec authentification étendue avec carte générique, prépartagée et client PIX à VPN](#) pour plus d'informations sur la connexion d'un client VPN à un pare-feu PIX à l'aide de caractères génériques, mode-config, la commande **sysopt connection permit-ipsec** et l'authentification étendue (Xauth).

Référez-vous à [Exemple de configuration d'IPsec entre un concentrateur VPN 3000 et un client VPN 4.x pour Windows utilisant RADIUS pour l'authentification utilisateur et la comptabilité](#) pour plus d'informations sur la façon d'établir un tunnel IPsec entre un concentrateur VPN Cisco 3000 et un client VPN Cisco 4.x pour Windows utilisant RADIUS pour l'authentification et la comptabilité utilisateur.

Conditions préalables

Conditions requises

Assurez-vous que vous répondez à ces exigences avant d'essayer cette configuration :

- Pool d'adresses à attribuer pour IPsec
- Groupe appelé « 3000clients » avec le mot de passe « cisco123 »
- Authentification utilisateur sur un serveur RADIUS

Components Used

Les informations contenues dans ce document sont basées sur les versions de matériel et de logiciel suivantes :

- Routeur 2621XM qui exécute le logiciel Cisco IOS Version 12.2(15)T2
- CiscoSecure ACS pour Windows 2000 version 4.2 (tout serveur RADIUS doit fonctionner)
- Client VPN Cisco pour Windows version 4.8 (tout client VPN 4.x et ultérieur doit fonctionner)

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Voici le résultat de la commande **show version** sur le routeur :

```
vpn2621#show version
Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-IK9S-M), Version 12.2(15)T2,  RELEASE SOFTWARE (fc2)
TAC Support: http://www.cisco.com/tac
Copyright (c) 1986-2003 by cisco Systems, Inc.
Compiled Thu 01-May-03 10:39 by nmasa
Image text-base: 0x80008098, data-base: 0x81BBB0BC

ROM: System Bootstrap, Version 12.2(7r) [cmong 7r], RELEASE SOFTWARE (fc1)

vpn2621 uptime is 1 hour, 34 minutes
System returned to ROM by reload
System image file is "flash:c2600-ik9s-mz.122-15.T2.bin"
```

This product contains cryptographic features and is subject to United States and local country laws governing import, export, transfer and use. Delivery of Cisco cryptographic products does not imply third-party authority to import, export, distribute or use encryption. Importers, exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with U.S. and local laws, return this product immediately.

A summary of U.S. laws governing Cisco cryptographic products may be found at:
<http://www.cisco.com/wwl/export/crypto/tool/stqrg.html>

If you require further assistance please contact us by sending email to export@cisco.com.

```
cisco 2621XM (MPC860P) processor (revision 0x100) with 125952K/5120K bytes of memory.
Processor board ID JAD064503FK (64188517)
M860 processor: part number 5, mask 2
Bridging software.
X.25 software, Version 3.0.0.
2 FastEthernet/IEEE 802.3 interface(s)
2 Serial(sync/async) network interface(s)
1 terminal line(s)
1 Virtual Private Network (VPN) Module(s)
1 cisco content engine(s)
32K bytes of non-volatile configuration memory.
32768K bytes of processor board System flash (Read/Write)
```

Configuration register is 0x2102

[Conventions](#)

Pour plus d'informations sur les conventions utilisées dans ce document, reportez-vous à [Conventions relatives aux conseils techniques Cisco](#).


[Configuration](#)

Cette section vous fournit des informations pour configurer les fonctionnalités décrites dans ce document.

Remarque : Utilisez [l'outil de recherche de commandes](#) (clients [inscrits](#) seulement) pour en savoir plus sur les commandes figurant dans le présent document.

Diagramme du réseau

Ce document utilise la configuration réseau suivante :

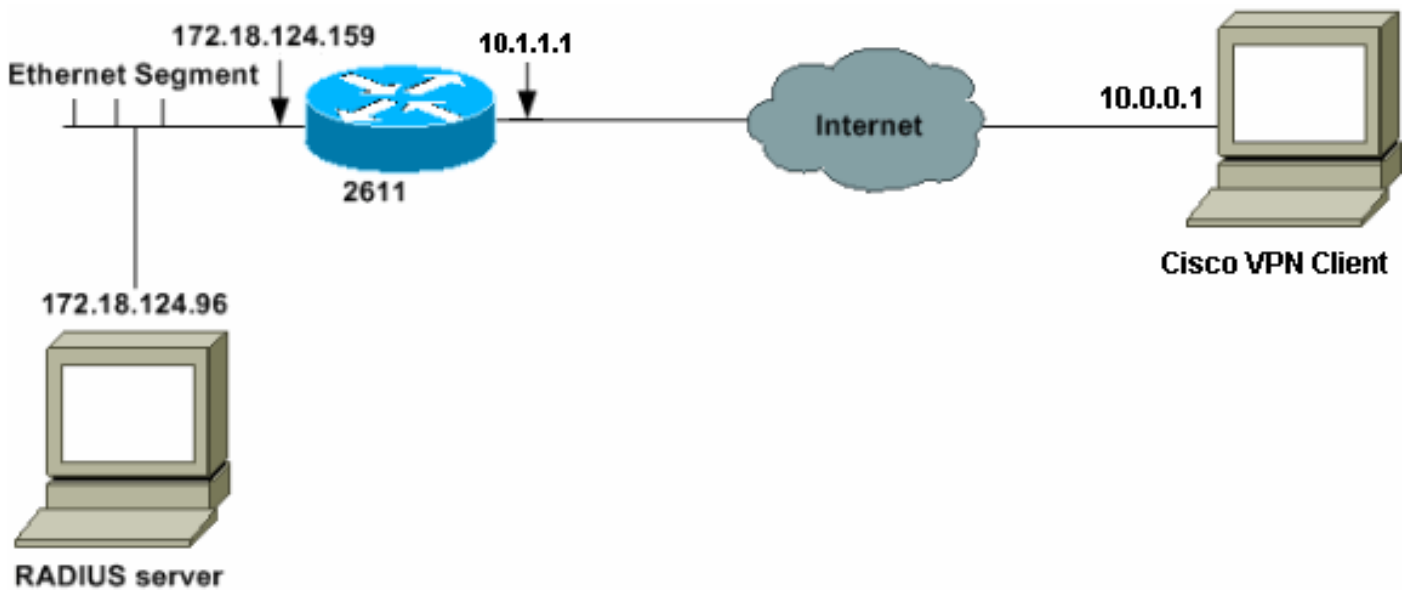

Configuration du routeur 2621XM

Routeur 2621XM

```
!--- Enable authentication, authorization and accounting
(AAA) !--- for user authentication and group
authorization. aaa new-model
!
!--- In order to enable extended authentication (Xauth)
for user authentication, !--- enable the aaa
authentication commands. !--- "Group radius local"
specifies RADIUS user authentication !--- to be used by
default and to use local database if RADIUS server is
not reachable.

aaa authentication login userauthen group radius local

!--- In order to enable group authorization, !--- enable
the aaa authorization commands.

aaa authorization network groupauthor local
!--- Create an Internet Security Association and !---
Key Management Protocol (ISAKMP) policy for Phase 1
negotiations. crypto isakmp policy 3
encr 3des
authentication pre-share
group 2
!

!--- Create a group that will be used to specify the !--
- Windows Internet Naming Service (WINS) and Domain
Naming Service (DNS) server !--- addresses to the
client, along with the pre-shared key for
```

```

authentication. crypto isakmp client configuration group
3000client
key cisco123
dns 10.1.1.10
wins 10.1.1.20
domain cisco.com
pool ippool
!
!--- Create the Phase 2 policy for actual data
encryption. crypto ipsec transform-set myset esp-3des
esp-sha-hmac
!
!--- Create a dynamic map and !--- apply the transform
set that was created. crypto dynamic-map dynmap 10
set transform-set myset
!
!--- Create the actual crypto map, !--- and apply the
AAA lists that were created earlier. crypto map
clientmap client authentication list userauthen
crypto map clientmap isakmp authorization list
groupauthor
crypto map clientmap client configuration address
respond
crypto map clientmap 10 ipsec-isakmp dynamic dynmap
!--- Apply the crypto map on the outside interface.
interface Ethernet0/0
ip address 10.1.1.1 255.255.255.0
  half-duplex
  crypto map clientmap
interface Ethernet0/1

ip address 172.18.124.159 255.255.255.0
  half-duplex
!
!--- Create a pool of addresses to be assigned to the
VPN Clients. ip local pool ippool 10.16.20.1
10.16.20.200
ip classless
ip route 0.0.0.0 0.0.0.0 10.1.1.2
ip http server
ip pim bidir-enable
!
!
!
!--- Specify the IP address of the RADIUS server, !---
along with the RADIUS shared secret key. radius-server
host 172.18.124.96 auth-port 1645 acct-port 1646 key
cisco123
radius-server retransmit 3

```

[Configuration du serveur RADIUS](#)

[Configurer le serveur RADIUS pour l'authentification des utilisateurs](#)

Complétez ces étapes afin de configurer le serveur RADIUS :

1. Ajoutez une entrée pour le routeur dans la base de données du serveur RADIUS.

AAA Client Hostname	AAA Client IP Address	Authenticate Using
340	172.18.124.151	RADIUS (Cisco Aironet)
Aironet-340-Lab	14.36.1.99	RADIUS (Cisco Aironet)
glenntest	172.18.124.120	RADIUS (Cisco IOS/PIX)
router	172.18.124.150	TACACS+ (Cisco IOS)

[Add Entry](#)

- [Network Device Groups](#)
- [Adding a Network Device Group](#)
- [Renaming a Network Device Group](#)
- [Deleting a Network Device Group](#)
- [AAA Clients](#)
- [Adding a AAA Client](#)
- [Editing a AAA Client](#)
- [Deleting a AAA Client](#)
- [AAA Servers](#)
- [Adding a AAA Server](#)
- [Editing a AAA Server](#)
- [Deleting a AAA Server](#)
- [Proxy Distribution Table](#)
- [Adding a Proxy Distribution Table Entry](#)
- [Sorting Proxy Distribution Table Entries](#)

2. Spécifiez l'adresse IP du routeur « 172.18.124.159 », ainsi que la clé secrète partagée « cisco123 ». Sélectionnez **RADIUS** dans la liste déroulante Authentifier à l'aide.

Add AAA Client

AAA Client Hostname:

AAA Client IP Address:

Key:

Authenticate Using:

Single Connect TACACS+ AAA Client (Record stop in accounting on failure).

Log Update/Watchdog Packets from this AAA Client

Log RADIUS Tunneling Packets from this AAA Client

[Submit](#) [Submit + Restart](#) [Cancel](#)

- [AAA Client Hostname](#)
- [AAA Client IP Address](#)
- [Key](#)
- [Network Device Group](#)
- [Authenticate Using](#)
- [Single Connect TACACS+ AAA Client](#)
- [Log Update/Watchdog Packets from this AAA Client](#)
- [Log RADIUS Tunneling Packets from this AAA Client](#)

AAA Client Hostname

The AAA Client Hostname is the name assigned to the AAA client.

[\[Back to Top\]](#)

AAA Client IP Address

3. Ajoutez le nom d'utilisateur de l'utilisateur VPN dans la base de données CiscoSecure. Dans l'exemple, le nom d'utilisateur est cisco.

User: [Find](#) [Add/Edit](#)

List users beginning with letter/number:

A B C D E F G H I J K L M
 N O P Q R S T U V W X Y Z
 0 1 2 3 4 5 6 7 8 9

[List All Users](#)

[Back to Help](#)

- [User Setup and External User Databases](#)
- [Finding a Specific User in the CiscoSecure User Database](#)
- [Adding a User to the CiscoSecure User Database](#)
- [Listing Usernames that Begin with a Particular Character](#)
- [Listing All Usernames in the CiscoSecure User Database](#)
- [Changing a Username in the CiscoSecure User Database](#)

User Setup enables you to configure individual user information, add users, and delete users in the database.

4. Dans la fenêtre suivante, spécifiez le mot de passe de l'utilisateur cisco. Dans cet exemple, le mot de passe est également cisco. Vous pouvez mapper le compte utilisateur à un groupe. Une fois terminé, cliquez sur **Soumettre**.

Supplementary User Info

Real Name
 Description

User Setup

Password Authentication:

CiscoSecure PAP (Also used for CHAP/MS-CHAP/ARAP, if the Separate field is not checked.)

Password
 Confirm Password

Separate (CHAP/MS-CHAP/ARAP)

When using a Token Card server for authentication, supplying a separate CHAP password for a token card user allows CHAP authentication. This is especially useful when token caching is enabled.

Group to which the user is assigned:

- [Account Disabled](#)
- [Deleting a Username](#)
- [Supplementary User Info](#)
- [Password Authentication](#)
- [Group to which the user is assigned](#)
- [Callback](#)
- [Client IP Address Assignment](#)
- [Advanced Settings](#)
- [Network Access Restrictions](#)
- [Max Sessions](#)
- [Usage Quotas](#)
- [Account Disable](#)
- [Downloadable ACLs](#)
- [Advanced TACACS+ Settings](#)
- [TACACS+ Enable Password](#)
- [TACACS+ Outbound Password](#)
- [TACACS+ Shell Command Authorization](#)
- [TACACS+ Unknown Services](#)
- [IETF RADIUS Attributes](#)
- [RADIUS Vendor-Specific Attributes](#)

Account Disabled Status


Select the Account Disabled check box to disable this account; clear the check box to enable the account.

[\[Back to Top\]](#)

[Configuration VPN Client 4.8](#)


Suivez la procédure suivante pour configurer Cisco VPN Client 4.8:

1. Sélectionnez **Start > Programs > Cisco Systems VPN Client > VPN Client** (démarrer > programmes > client VPN Cisco Systems > client VPN).
2. Cliquez **New** pour ouvrir la fenêtre **Create New VPN Connection Entry**.

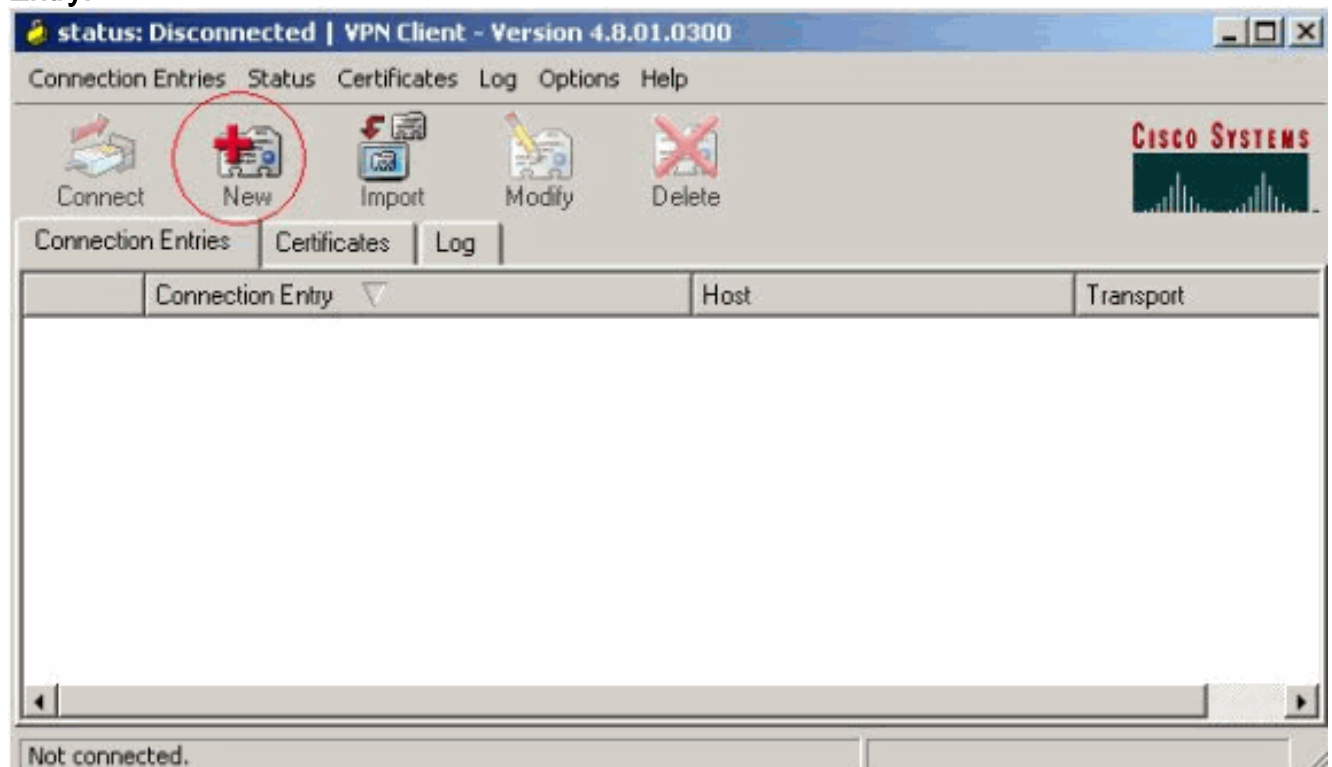


3. Entrez le nom de l'entrée de connexion avec une description. Saisissez l'adresse IP externe

du routeur dans la zone Host. Entrez ensuite le nom du groupe VPN et le mot de passe, puis cliquez sur

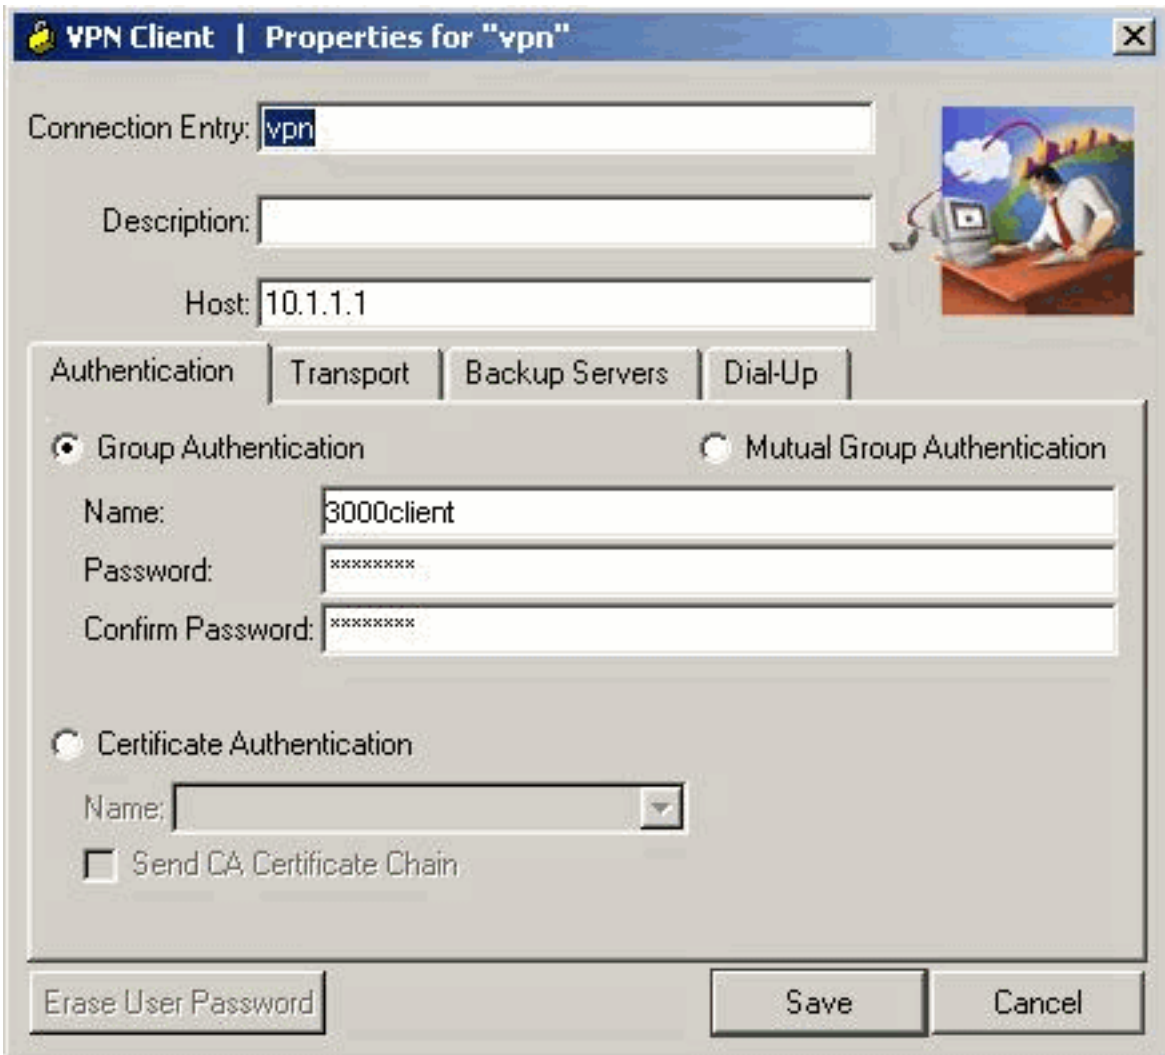


Save.


4. Cliquez sur la connexion que vous souhaitez utiliser et cliquez sur **Connect** dans la fenêtre principale du Client VPN.

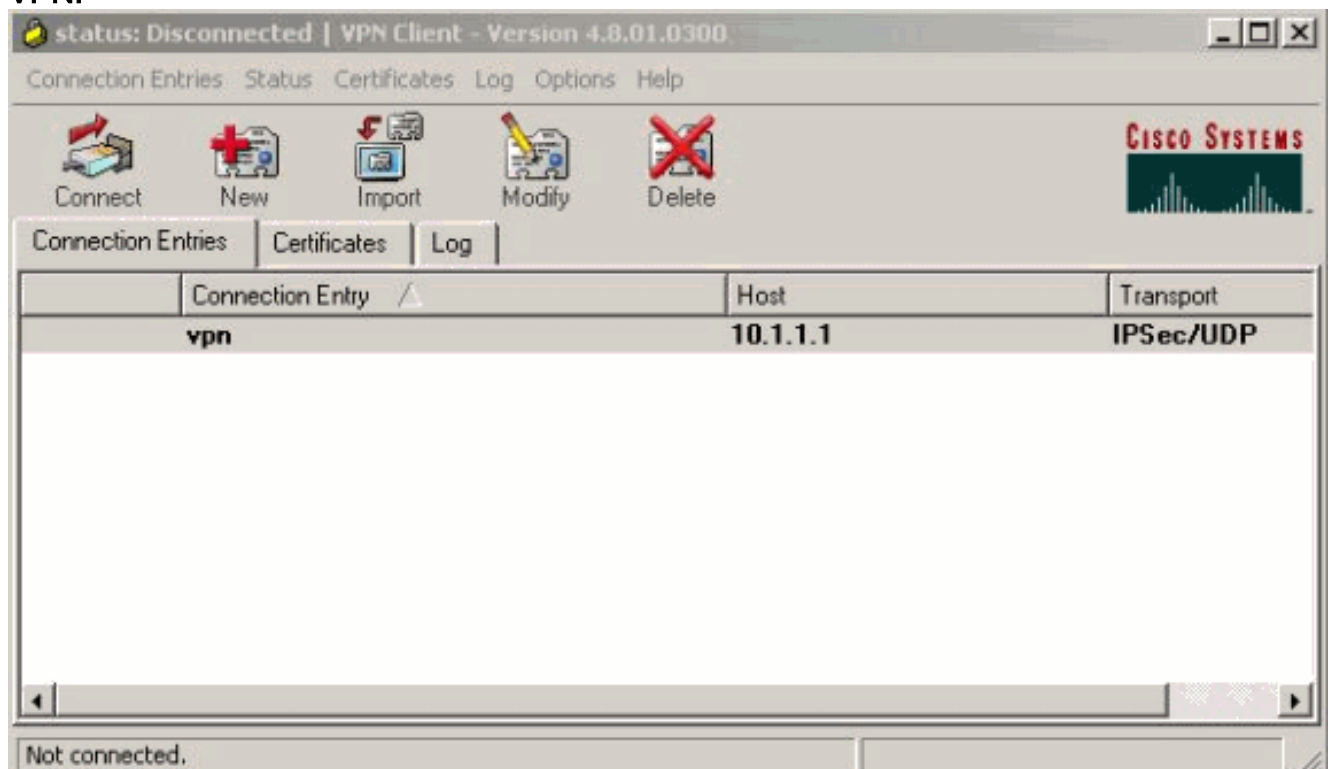

5. Lorsque vous y êtes invité, saisissez le nom d'utilisateur et le mot de passe pour Xauth et cliquez sur **OK** pour vous connecter au réseau distant.

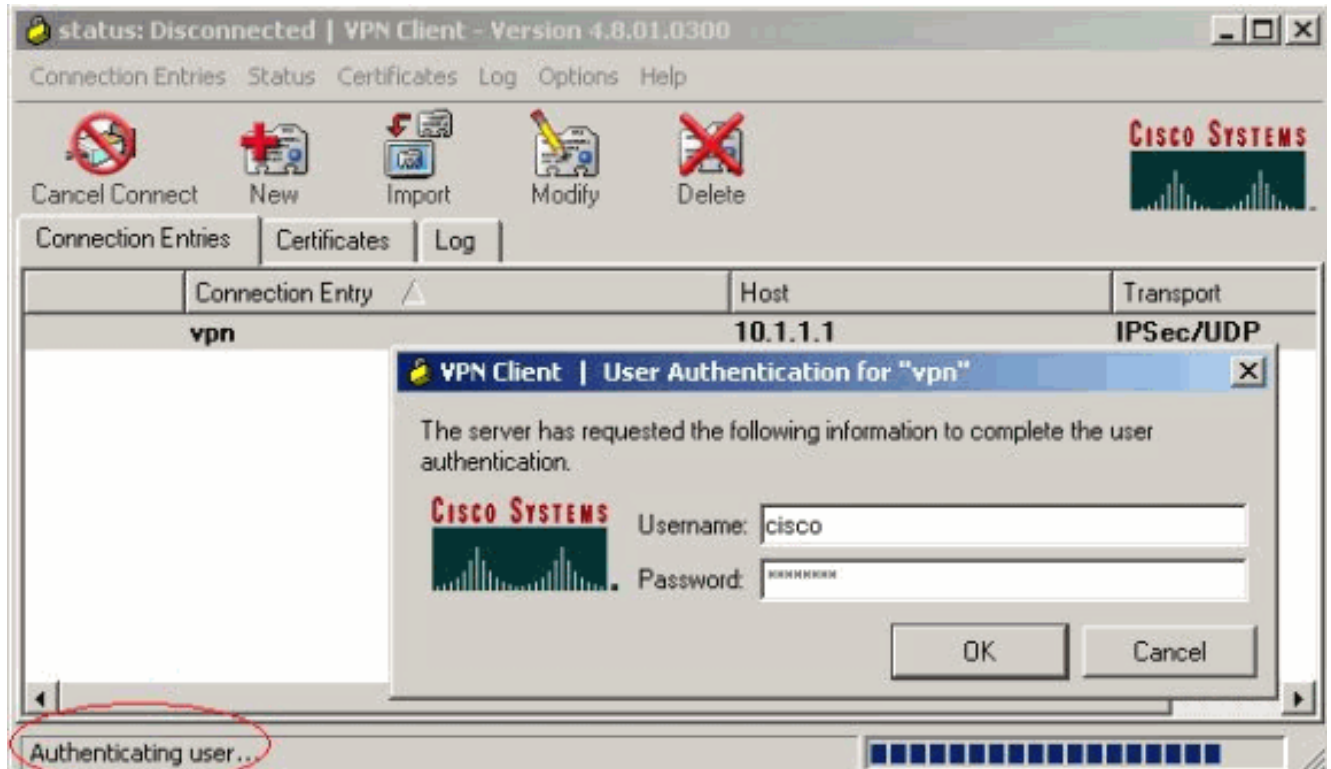

Le client VPN se connecte au routeur sur le site central.

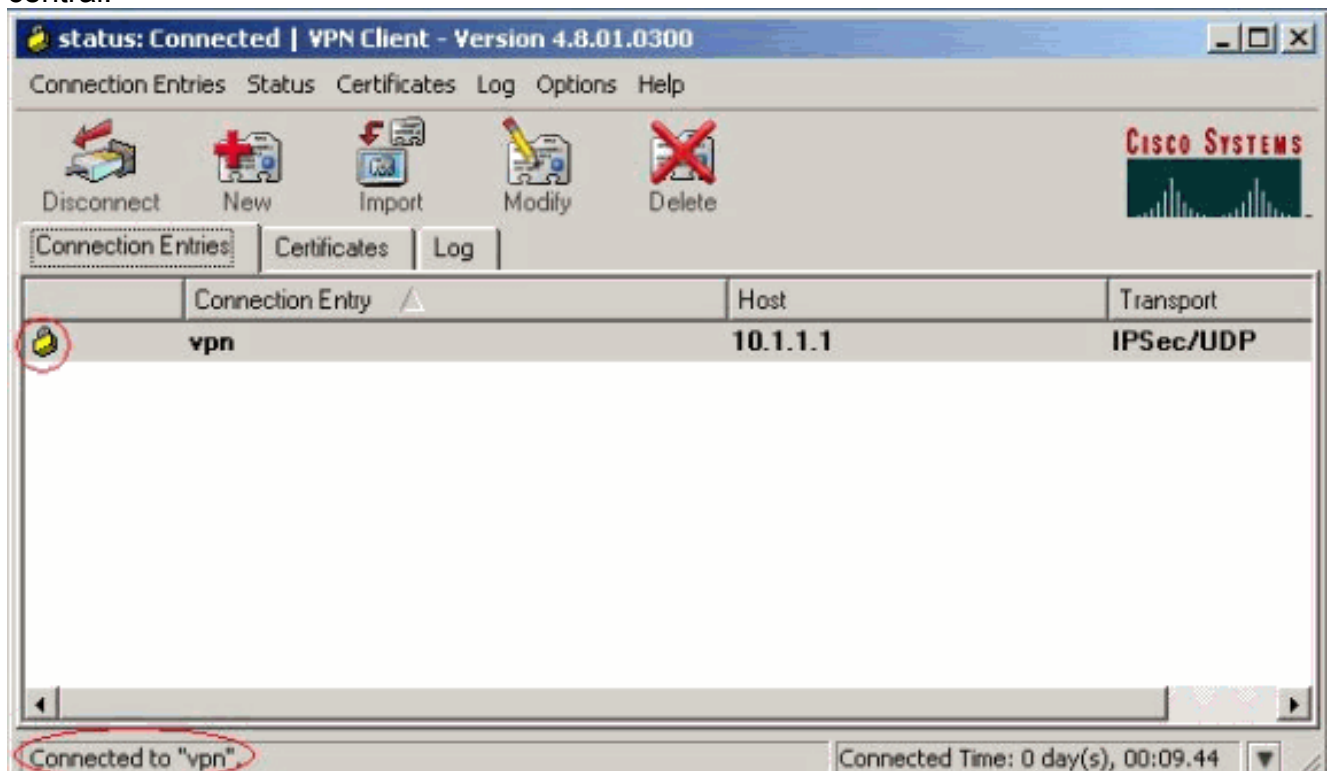

[Activation de la transmission tunnel partagée](#)

Afin d'activer la transmission tunnel partagée pour les connexions VPN, assurez-vous que vous avez une liste de contrôle d'accès (ACL) configurée sur le routeur. Dans cet exemple, la commande **access-list 108** est associée au groupe à des fins de fractionnement en canaux, et le tunnel est formé au réseau 14.38.X.X /16. Le trafic circule non chiffré vers les périphériques qui ne

figurent pas dans la liste de contrôle d'accès 108 (par exemple, Internet).

```
access-list 108 permit ip 172.18.124.0 0.0.255.255 10.16.20.0 0.0.0.255
```

Appliquez la liste de contrôle d'accès aux propriétés du groupe.

```
crypto isakmp client configuration group 3000client
key cisco123
dns 10.1.1.10
wins 10.1.1.20
domain cisco.com
pool ippool
ac1 108
```

Configuration de la fonction de secours du serveur RADIUS

Lorsque le serveur RADIUS principal devient indisponible, le routeur bascule vers le serveur RADIUS de sauvegarde actif suivant. Le routeur continuera à utiliser le serveur RADIUS secondaire pour toujours, même si le serveur principal est disponible. Généralement, le serveur principal est hautes performances et le serveur préféré. Si le serveur secondaire n'est pas disponible, la base de données locale peut être utilisée pour l'authentification à l'aide de la commande [aaa authentication login userauthen group radius local](#).

Vérification

Référez-vous à cette section pour vous assurer du bon fonctionnement de votre configuration.

L'[Outil Interpréteur de sortie \(clients enregistrés uniquement\) \(OIT\) prend en charge certaines commandes show](#). Utilisez l'OIT pour afficher une analyse de la sortie de la commande **show**.

Voici le résultat des commandes **show** pertinentes :

```
vpn2621#show crypto isakmp sa
dst          src          state          conn-id      slot
10.1.1.1    10.0.0.1    QM_IDLE       3           0

vpn2621#show crypto ipsec sa interface: Ethernet0/0
Crypto map tag: clientmap, local addr. 10.1.1.1

local ident (addr/mask/prot/port): (10.1.1.1/255.255.255.255/0/0)
remote ident (addr/mask/prot/port): (10.16.20.2/255.255.255.255/0/0)
current_peer: 10.0.0.1
  PERMIT, flags={}
#pkts encaps: 5, #pkts encrypt: 5, #pkts digest 5
#pkts decaps: 5, #pkts decrypt: 5, #pkts verify 5
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0
#send errors 0, #recv errors 0

local crypto endpt.: 10.1.1.1, remote crypto endpt.: 10.0.0.1
```

path mtu 1500, media mtu 1500
current outbound spi: 77AFCCFA

inbound esp sas:

spi: 0xC7AC22AB(3349947051)
transform: esp-3des esp-sha-hmac ,
in use settings ={Tunnel, }
slot: 0, conn id: 2000, flow_id: 1, crypto map: clientmap
sa timing: remaining key lifetime (k/sec): (4608000/3444)
IV size: 8 bytes
replay detection support: Y

inbound ah sas:

inbound pcp sas:

outbound esp sas:

spi: 0x77AFCCFA(2008009978)
transform: esp-3des esp-sha-hmac ,
in use settings ={Tunnel, }
slot: 0, conn id: 2001, flow_id: 2, crypto map: clientmap
sa timing: remaining key lifetime (k/sec): (4608000/3444)
IV size: 8 bytes
replay detection support: Y

outbound ah sas:

outbound pcp sas:

local ident (addr/mask/prot/port): (172.18.124.0/255.255.255.0/0/0)

remote ident (addr/mask/prot/port): (10.16.20.2/255.255.255.255/0/0)

current peer: 10.0.0.1

PERMIT, flags={}

#pkts encaps: 4, #pkts encrypt: 4, #pkts digest 4

#pkts decaps: 6, #pkts decrypt: 6, #pkts verify 6

#pkts compressed: 0, #pkts decompressed: 0

#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0

#send errors 0, #recv errors 0

local crypto endpt.: 10.1.1.1, remote crypto endpt.: 10.0.0.1

path mtu 1500, media mtu 1500

current outbound spi: 2EE5BF09

inbound esp sas:

spi: 0x3565451F(895829279)
transform: esp-3des esp-sha-hmac ,
in use settings ={Tunnel, }
slot: 0, conn id: 2002, flow_id: 3, crypto map: clientmap
sa timing: remaining key lifetime (k/sec): (4607999/3469)
IV size: 8 bytes
replay detection support: Y

inbound ah sas:

inbound pcp sas:

outbound esp sas:

spi: 0x2EE5BF09(786808585)
transform: esp-3des esp-sha-hmac ,
in use settings ={Tunnel, }
slot: 0, conn id: 2003, flow_id: 4, crypto map: clientmap
sa timing: remaining key lifetime (k/sec): (4607999/3469)
IV size: 8 bytes

replay detection support: Y

outbound ah sas:

outbound pcg sas:

vpn2621#show crypto engine connections active

ID	Interface	IP-Address	State	Algorithm	Encrypt	Decrypt
3	Ethernet0/0	10.1.1.1	set	HMAC_SHA+3DES_56_C	0	0
2000	Ethernet0/0	10.1.1.1	set	HMAC_SHA+3DES_56_C	0	5
2001	Ethernet0/0	10.1.1.1	set	HMAC_SHA+3DES_56_C	5	0
2002	Ethernet0/0	10.1.1.1	set	HMAC_SHA+3DES_56_C	0	6
2003	Ethernet0/0	10.1.1.1	set	HMAC_SHA+3DES_56_C	4	0

vpn2621#show crypto engine accelerator statistic

Virtual Private Network (VPN) Module in aim slot : 0

Statistics for Hardware VPN Module since the last clear

of counters 5570 seconds ago

14 packets in	14 packets out
0 packet overruns	0 output packets dropped
0 packets decompressed	0 packets compressed
0 compressed bytes in	0 uncompressed bytes in
0 decompressed bytes out	0 compressed bytes out
0 packets bypass compression	0 packets abort compression
0 packets fail decompression	0 packets fail compression
7 packets decrypted	7 packets encrypted
532 bytes decrypted	532 bytes encrypted
784 bytes before decrypt	19200 bytes after encrypt
0 paks/sec in	0 paks/sec out
0 Kbits/sec decrypted	0 Kbits/sec encrypted

Last 5 minutes:

14 packets in	14 packets out
7 packets decrypted	7 packets encrypted
532 bytes decrypted	420 bytes encrypted
784 bytes before decrypt	672 bytes after encrypt
0 paks/sec in	0 paks/sec out
0 Kbits/sec decrypted	0 Kbits/sec encrypted

rx_no_endp:	0	rx_hi_discards:	0	fw_failure:	0
invalid_sa:	0	invalid_flow:	0	cgx_errors	0
fw_qs_filled:	0	fw_resource_lock:	0	lotx_full_err:	0
null_ip_error:	0	pad_size_error:	0	out_bound_dh_acc:	0
esp_auth_fail:	0	ah_auth_failure:	0	crypto_pad_error:	0
ah_prot_absent:	0	ah_seq_failure:	0	ah_spi_failure:	0
esp_prot_absent:	0	esp_seq_fail:	0	esp_spi_failure:	0
obound_sa_acc:	0	invalid_sa:	0	out_bound_sa_flow:	0
invalid_dh:	0	bad_keygroup:	0	out_of_memory:	0
no_sh_secret:	0	no_keys:	0	invalid_cmd:	0
dsp_coproc_err:	0	comp_unsupported:	0	pak_too_big:	0

null packets: 0

pak_mp_length_spec_fault: 0 cmd queue errors: 0

tx_lo_queue_size_max 0 cmd_unimplemented: 0

Interrupts: 439 Immed: 0 HiPri ints: 14

LoPri ints: 425 POST Errs: 0 Alerts: 0

Unk Cmds: 0 UnexpCmds: 0

cgx_cmd_pending:0 packet_loop_max: 0packet_loop_limit: 0

vpn2621#sh crypto engine configuration

crypto engine name: Virtual Private Network (VPN) Module

```
crypto engine type: hardware

Product Name: AIM-VPN/BP
Configuration: 0x000109010F00F00784000000
               : 0x995FB1441BA279D5BD46CF6C
               : 0xECE77614C30835CB0A000300
               : 0x000000000000000000000000
CryptIC Version: 001.000
CGX Version: 001.009
CGX Reserved: 0x000F
PCDB info: 0x07F0 0x0084 0x0000
Serial Number: 0x5F9944B1A21BD57946BD
               : 0x6CCFE7EC14768C3CB35
DSP firmware version: 000.010
DSP Bootstrap Version: 000.003
DSP Bootstrap Info: 0x0000

Compression: Yes
  DES: Yes
  3 DES: Yes
  AES CBC: No
  AES CNTR: No
Maximum buffer length: 4096
  Maximum DH index: 0210
  Maximum SA index: 0420
  Maximum Flow index: 0840
  Maximum RSA key size: 0000
crypto engine in slot: 0
  platform: VPN hardware accelerator

Crypto Adjacency Counts:
  Lock Count: 0
  Unlock Count: 0
crypto lib version: 16.0.0
ipsec lib version: 2.0.0
```

Dépannage

Utilisez cette section pour dépanner votre configuration.

Dépannage des commandes

L'[Outil Interpréteur de sortie \(clients enregistrés uniquement\) \(OIT\)](#) prend en charge certaines [commandes show](#). Utilisez l'OIT pour afficher une analyse de la sortie de la commande **show**.

Remarque : Consulter les [renseignements importants sur les commandes de débogage](#) avant d'utiliser les commandes de **débogage**.

- **debug crypto ipsec** — Affiche des informations de débogage sur les connexions IPsec.
- **debug crypto isakmp** - Affiche les informations de débogage sur les connexions IPsec et affiche le premier jeu d'attributs refusé en raison d'incompatibilités aux deux extrémités.
- **debug crypto engine** — Affiche des informations du moteur de chiffrement.
- **debug aaa authentication** - Affiche des informations sur l'authentification TACACS+ (AAA/Terminal Access Controller Access Control System Plus).
- **debug aaa Authorization raduis** - Affiche des informations sur l'autorisation AAA/TACACS+.
- **debug radius** : affiche des informations sur le dépannage de la communication entre le serveur RADIUS et le routeur.

Sortie de débogage

Cette section fournit des informations de débogage à partir du routeur que vous pouvez utiliser pour dépanner votre configuration.

Journaux du routeur

```
vpn2621#show debug
```

```
General OS:
```

```
AAA Authentication debugging is on
AAA Authorization debugging is on
```

```
Radius protocol debugging is on
Radius packet protocol debugging is on
```

```
Cryptographic Subsystem:
```

```
Crypto ISAKMP debugging is on
Crypto Engine debugging is on
Crypto IPSEC debugging is on
```

```
vpn2621#
```

```
*ISAKMP (0:0): received packet from 10.0.0.1 dport 500 sport 500 Global (N) NEW SA
```

```
*ISAKMP: Created a peer struct for 10.0.0.1, peer port 500
```

```
*ISAKMP: Locking peer struct 0x83166B20, IKE refcount 1 for
crypto_ikmp_config_initialize_sa
```

```
*ISAKMP (0:0): Setting client config settings 82F0F82C
```

```
*ISAKMP (0:0): (Re)Setting client xauth list and state
```

```
*ISAKMP: local port 500, remote port 500
```

```
*ISAKMP: insert sa successfully sa = 83165694
```

```
*ISAKMP (0:1): processing SA payload. message ID = 0
```

```
*ISAKMP (0:1): processing ID payload. message ID = 0
```

```
*ISAKMP (0:1): peer matches *none* of the profiles
```

```
*ISAKMP (0:1): processing vendor id payload
```

```
*ISAKMP (0:1): vendor ID seems Unity/DPD but major 215 mismatch
```

```
*ISAKMP (0:1): vendor ID is XAUTH
```

```
*ISAKMP (0:1): processing vendor id payload
```

```
*ISAKMP (0:1): vendor ID is DPD
```

```
*ISAKMP (0:1): processing vendor id payload
```

```
*ISAKMP (0:1): vendor ID seems Unity/DPD but major 123 mismatch
```

```
*ISAKMP (0:1): vendor ID is NAT-T v2
```

```
*ISAKMP (0:1): processing vendor id payload
```

```
*ISAKMP (0:1): vendor ID seems Unity/DPD but major 194 mismatch
```

```
*ISAKMP (0:1): processing vendor id payload
```

```
*ISAKMP (0:1): vendor ID is Unity
```

```
*ISAKMP (0:1) Authentication by xauth preshared
```

```
*ISAKMP (0:1): Checking ISAKMP transform 1 against priority 3 policy
```

```
*ISAKMP: encryption AES-CBC
```

```
*ISAKMP: hash SHA
```

```
*ISAKMP: default group 2
```

```
*ISAKMP: auth XAUTHInitPreShared
```

```
*ISAKMP: life type in seconds
```

```
*ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
```

```
*ISAKMP: keylength of 256
```

```
*ISAKMP (0:1): Encryption algorithm offered does not match policy!
```

```
/en/US/docs/net_mgmt/wan_service_administrator/1.1/administrator/guide/getstart.html
```

```
-snip/en/US/docs/net_mgmt/wan_service_administrator/1.1/administrator/guide/getstart.html
```

```
/en/US/docs/net_mgmt/wan_service_administrator/1.1/administrator/guide/getstart.html
```

```
/en/US/docs/net_mgmt/wan_service_administrator/1.1/administrator/guide/getstart.html
```

```
!--- ISAKMP values are acceptable and then the router continues with the !--- ISAKMP negotiation
process. *ISAKMP (0:1): Checking ISAKMP transform 9 against priority 3 policy
*ISAKMP:      encryption 3DES-CBC
*ISAKMP:      hash SHA
*ISAKMP:      default group 2
*ISAKMP:      auth XAUTHInitPreShared
*ISAKMP:      life type in seconds
*ISAKMP:      life duration (VPI) of  0x0 0x20 0xC4 0x9B
*ISAKMP (0:1): atts are acceptable. Next payload is 3
*CryptoEngine0: generate alg parameter
*CryptoEngine0: CRYPTO_ISA_DH_CREATE(hw)(ipsec)
*CRYPTO_ENGINE: Dh phase 1 status: 0
*ISAKMP (0:1): processing KE payload. message ID = 0
*CryptoEngine0: generate alg parameter
*CryptoEngine0: CRYPTO_ISA_DH_SHARE_SECRET(hw)(ipsec)
*ISAKMP (0:1): processing NONCE payload. message ID = 0
*ISAKMP (0:1): vendor ID is NAT-T v2
*AAA: parse name=ISAKMP-ID-AUTH idb type=-1 tty=-1
*AAA/MEMORY: create_user (0x830E12E8) user='3000client' ruser='NULL' ds0=0
port='ISAKMP-ID-AUTH' rem_addr='10.0.0.1' authen_type=NONE service=LOGIN
priv=0 initial_task_id='0', vrf= (id=0)
*ISAKMP (0:1): Input = IKE_MESG_FROM_PEER, IKE_AM_EXCH
*ISAKMP (0:1): Old State = IKE_READY  New State = IKE_R_AM_AAA_AWAIT

*ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(54534875): Port='ISAKMP-ID-AUTH'
list='groupauthor' service=NET
*AAA/AUTHOR/CRYPTO AAA: ISAKMP-ID-AUTH(54534875) user='3000client'
*ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(54534875): send AV service=ike
*ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(54534875): send AV protocol=ipsec
*ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(54534875): found list "groupauthor"
*ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(54534875): Method=LOCAL
*AAA/AUTHOR (54534875): Post authorization status = PASS_ADD
*ISAKMP: got callback 1
*
AAA/AUTHOR/IKE: Processing AV service=ike
*
AAA/AUTHOR/IKE: Processing AV protocol=ipsec
*
AAA/AUTHOR/IKE: Processing AV tunnel-password=cisco123
*
AAA/AUTHOR/IKE: Processing AV default-domain*cisco.com
*
AAA/AUTHOR/IKE: Processing AV addr-pool*ippool
*
AAA/AUTHOR/IKE: Processing AV key-exchange=ike
*
AAA/AUTHOR/IKE: Processing AV group-lock*0
*
AAA/AUTHOR/IKE: Processing AV timeout*0
*
AAA/AUTHOR/IKE: Processing AV idletime*0
*
AAA/AUTHOR/IKE: Processing AV inacl*108
*
AAA/AUTHOR/IKE: Processing AV dns-servers*10.1.1.10 0.0.0.0
*
AAA/AUTHOR/IKE: Processing AV wins-servers*10.1.1.20 0.0.0.0
*CryptoEngine0: create ISAKMP SKEYID for conn id 1
*CryptoEngine0: CRYPTO_ISA_SA_CREATE(hw)(ipsec)
*ISAKMP (0:1): SKEYID state generated
*ISAKMP (0:1): constructed NAT-T vendor-02 ID
*ISAKMP (0:1): SA is doing pre-shared key authentication plus XAUTH using
id type ID_IPV4_ADDR
```

```
*ISAKMP (1): ID payload
  next-payload : 10
  type         : 1
  addr         : 10.1.1.1
  protocol     : 17
  port         : 0
  length       : 8
*ISAKMP (1): Toine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
*ISAKMP (0:1): processing HASH payload. message ID = 0
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)tal payload length: 12
*CryptoEngine0: generate hmac conte
*ISAKMP (0:1): processing NOTIFY INITIAL_CONTACT protocol 1
  spi 0, message ID = 0, sa = 83165694
*ISAKMP (0:1): Process initial contact,
bring down existing phase 1 and 2 SA's with local 10.1.1.1 remote
10.0.0.1 remote port 500
*ISAKMP (0:1): returning IP addr to the address pool
*ISAKMP:received payload type 17
*ISAKMP (0:1): Detected NAT-D payload
*ISAKMP (0:1): recalc my hash for NAT-D
*ISAKMP (0:1): NAT match MINE hash
*ISAKMP:received payload type 17xt for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*ISAKMP (0:1): constructed HIS NAT-D
*ISAKMP (0:1): constructed MINE NAT-D
*ISAKMP (0:1): sending packet to 10.0.0.1 my_port 500 peer_port 500 (R) AG_INIT_EXCH
*ISAKMP (0:1): Input = IKE_MSG_FROM_AAA, PRESHARED_KEY_REPLY
*ISAKMP (0:1): Old State = IKE_R_AM_AAA_AWAIT New State = IKE_R_AM2

*AAA/MEMORY: free_user (0x830E12E8) user='3000client' ruser='NULL' port='ISAKMP-ID-AUTH'
  rem_addr='10.0.0.1' authen_type=NONE service=LOGIN priv=0 vrf= (id=0)
*ISAKMP (0:1): received packet from 10.0.0.1 dport 500 sport 500 Global (R) AG_INIT_EXCH
*CryptoEng
*ISAKMP (0:1): Detected NAT-D payload
*ISAKMP (0:1): recalc his hash for NAT-D
*ISAKMP (0:1): NAT match HIS hash
*ISAKMP (0:1): SA has been authenticated with 10.0.0.1
*CryptoEngine0: clear dh number for conn id 1
*ISAKMP: Trying to insert a peer 10.0.0.1/500/, and inserted successfully.
*ISAKMP (0:1): IKE_DPD is enabled, initializing timers
*ISAKMP: set new node 2011892843 to CONF_XAUTH
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*IPSEC(key_engine): got a queue event...
*CryptoEngine0: CRYPTO_ISA_DH_DELETE(hw)(ipsec)
*CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw)(ipsec)
*ISAKMP (0:1): sending packet to 10.0.0.1 my_port 500 peer_port 500 (R) QM_IDLE
*ISAKMP (0:1): purging node 2011892843
*ISAKMP: Sending phase 1 responder lifetime 86400

*ISAKMP (0:1): peer matches *none* of the profiles
*ISAKMP (0:1): Input = IKE_MSG_FROM_PEER, IKE_AM_EXCH
*ISAKMP (0:1): Old State = IKE_R_AM2 New State = IKE_P1_COMPLETE

*ISAKMP (0:1): Need XAUTH
*AAA: parse name=ISAKMP idb type=-1 tty=-1
*AAA/MEMORY: create_user (0x830DE43C) user='NULL' ruser='NULL' ds0=0 port='ISAKMP'
  rem_addr='10.0.0.1' authen_type=ASCII service=LOGIN priv=0 initial_task_id='0',
  vrf= (id=0)
*ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PHASE1_COMPLETE
*ISAKMP (0:1): Old State = IKE_P1_COMPLETE New State = IKE_XAUTH_AAA_START_LOGIN_AWAIT

*AAA/AUTHEN/START (992119247): port='ISAKMP' list='userauthen' action=LOGIN service=LOGIN
```



```
*AAA/AUTHEN/START (992119247): found list userauthen
*AAA/AUTHEN/START (992119247): Method=radius (radius)
*AAA/AUTHEN(992119247): Status=GETUSER
*ISAKMP: got callback 1
*ISAKMP: set new node -883516238 to CONF_XAUTH
*ISAKMP/xauth: request attribute XAUTH_USER_NAME_V2
*ISAKMP/xauth: request attribute XAUTH_USER_PASSWORD_V2
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*ISAKMP (0:1): initiating peer config to 10.0.0.1. ID = -883516238
*CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw)(ipsec)
*ISAKMP (0:1): sending packet to 10.0.0.1 my_port 500 peer_port 500 (R) CONF_XAUTH
*ISAKMP (0:1): Input = IKE_MESG_FROM_AAA, IKE_AAA_START_LOGIN
*ISAKMP (0:1): Old State = IKE_XAUTH_AAA_START_LOGIN_AWAIT New State = IKE_XAUTH_REQ_SENT

*ISAKMP (0:1): retransmitting phase 2 CONF_XAUTH -883516238 ...
*ISAKMP (0:1): incrementing error counter on sa: retransmit phase 2
*ISAKMP (0:1): incrementing error counter on sa: retransmit phase 2
*ISAKMP (0:1): retransmitting phase 2 -883516238 CONF_XAUTH
*ISAKMP (0:1): sending packet to 10.0.0.1 my_port 500 peer_port 500 (R) CONF_XAUTH
*ISAKMP (0:1): received packet from 10.0.0.1 dport 500 sport 500 Global (R) CONF_XAUTH
*CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
*ISAKMP (0:1): processing transaction payload from 10.0.0.1. message ID = -883516238
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*ISAKMP: Config payload REPLY
*ISAKMP/xauth: reply attribute XAUTH_USER_NAME_V2
*ISAKMP/xauth: reply attribute XAUTH_USER_PASSWORD_V2
*ISAKMP (0:1): deleting node -883516238 error FALSE reason
        "done with xauth request/reply exchange"
*ISAKMP (0:1): Input = IKE_MESG_FROM_PEER, IKE_CFG_REPLY
*ISAKMP (0:1): Old State = IKE_XAUTH_REQ_SENT New State = IKE_XAUTH_AAA_CONT_LOGIN_AWAIT

*AAA/AUTHEN/CONT (992119247): continue_login (user='(undef)')
*AAA/AUTHEN(992119247): Status=GETUSER
*AAA/AUTHEN(992119247): Method=radius (radius)
*AAA/AUTHEN(992119247): Status=GETPASS
*AAA/AUTHEN/CONT (992119247): continue_login (user='cisco')
*AAA/AUTHEN(992119247): Status=GETPASS
*AAA/AUTHEN(992119247): Method=radius (radius)
*RADIUS: Pick NAS IP for u=0x830DE43C tableid=0 cfg_addr=0.0.0.0 best_addr=10.1.1.1
*RADIUS: ustruct sharecount=2
*Radius: radius_port_info() success=0 radius_nas_port=1
*RADIUS(00000000): Send Access-Request to 172.18.124.96:1645 id 21645/4, len 72
*RADIUS: authenticator F2 7F ED 86 2B D9 80 1F - 74 D7 8F 90 3B EF F0 D5
*RADIUS: NAS-IP-Address [4] 6 10.1.1.1
*RADIUS: NAS-Port-Type [61] 6 Async [0]
*RADIUS: User-Name [1] 9 "cisco"
*RADIUS: Calling-Station-Id [31] 13 "10.0.0.1"
*RADIUS: User-Password [2] 18 *
*RADIUS: Retransmit to (172.18.124.96:1645,1646) for id 21645/4
*RADIUS: Received from id 21645/4 172.18.124.96:1645, Access-Accept, len 62
*RADIUS: authenticator 97 DF CB C8 74 AC 92 D6 - 3B D8 D9 DC 9E 85 94 35
*RADIUS: Framed-IP-Address [8] 6 172.17.8.123
*RADIUS: Class [25] 36
*RADIUS: 43 49 53 43 4F 41 43 53 3A 30 30 30 30 31 38 32 [CISCOACS:0000182]
*RADIUS: 62 2F 61 63 31 32 37 63 39 66 2F 74 6E 65 75 62 [b/ac127c9f/cisco]
*RADIUS: 65 72
*RADIUS: saved authorization data for user 830DE43C at 830DB5FC
*AAA/AUTHEN(992119247): Status=PASS
*ISAKMP: got callback 1
*ISAKMP: set new node -1874799558 to CONF_XAUTH
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
```

```
*ISAKMP (0:1): initiating peer config to 10.0.0.1. ID = -1874799558
*CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw)(ipsec)
*ISAKMP (0:1): sending packet to 10.0.0.1 my_port 500 peer_port 500 (R) CONF_XAUTH
*ISAKMP (0:1): Input = IKE_MESG_FROM_AAA, IKE_AAA_CONT_LOGIN
*ISAKMP (0:1): Old State = IKE_XAUTH_AAA_CONT_LOGIN_AWAIT New State = IKE_XAUTH_SET_SENT

*AAA/MEMORY: free_user (0x830DE43C) user='cisco' ruser='NULL' port='ISAKMP'
rem_addr='10.0.0.1' authen_type=ASCII service=LOGIN priv=0 vrf= (id=0)
*ISAKMP (0:1): received packet from 10.0.0.1 dport 500 sport 500 Global (R) CONF_XAUTH
*CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
*ISAKMP (0:1): processing transaction payload from 10.0.0.1. message ID = -1874799558
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*ISAKMP: Config payload ACK
*ISAKMP (0:1): XAUTH ACK Processed
*ISAKMP (0:1): deleting node -1874799558 error FALSE reason "done with transaction"
*ISAKMP (0:1): Input = IKE_MESG_FROM_PEER, IKE_CFG_ACK
*ISAKMP (0:1): Old State = IKE_XAUTH_SET_SENT New State = IKE_P1_COMPLETE

*ISAKMP (0:1): Input = IKE_MESG_INTERNAL, IKE_PHASE1_COMPLETE
*ISAKMP (0:1): Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE

*ISAKMP (0:1): received packet from 10.0.0.1 dport 500 sport 500 Global (R) QM_IDLE
*ISAKMP: set new node -1474156599 to QM_IDLE
*CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
*ISAKMP (0:1): processing transaction payload from 10.0.0.1. message ID = -1474156599
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*ISAKMP: Config payload REQUEST
*ISAKMP (0:1): checking request:
*ISAKMP: IP4_ADDRESS
*ISAKMP: IP4_NETMASK
*ISAKMP: IP4_DNS
*ISAKMP: IP4_NBNS
*ISAKMP: ADDRESS_EXPIRY
*ISAKMP: APPLICATION_VERSION
*ISAKMP: UNKNOWN Unknown Attr: 0x7000
*ISAKMP: UNKNOWN Unknown Attr: 0x7001
*ISAKMP: DEFAULT_DOMAIN
*ISAKMP: SPLIT_INCLUDE
*ISAKMP: UNKNOWN Unknown Attr: 0x7003
*ISAKMP: UNKNOWN Unknown Attr: 0x7007
*ISAKMP: UNKNOWN Unknown Attr: 0x7008
*ISAKMP: UNKNOWN Unknown Attr: 0x7009
*ISAKMP: UNKNOWN Unknown Attr: 0x700A
*ISAKMP: UNKNOWN Unknown Attr: 0x7005
*AAA: parse name=ISAKMP-GROUP-AUTH idb type=-1 tty=-1
*AAA/MEMORY: create_user (0x831663A0) user='3000client' ruser='NULL' ds0=0
port='ISAKMP-GROUP-AUTH' rem_addr='10.0.0.1' authen_type=NONE service=LOGIN
priv=0 initial_task_id='0', vrf= (id=0)
*ISAKMP (0:1): Input = IKE_MESG_FROM_PEER, IKE_CFG_REQUEST
*ISAKMP (0:1): Old State = IKE_P1_COMPLETE New State = IKE_CONFIG_AUTHOR_AAA_AWAIT

*ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(3136771130): Port='ISAKMP-GROUP-AUTH'
list='groupauthor' service=NET
*AAA/AUTHOR/CRYPTO AAA: ISAKMP-GROUP-AUTH(3136771130) user='3000client'
*ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(3136771130): send AV service=ike
*ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(3136771130): send AV protocol=ipsec
*ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(3136771130): found list "groupauthor"
*ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(3136771130): Method=LOCAL
*AAA/AUTHOR (3136771130): Post authorization status = PASS_ADD
*ISAKMP: got callback 1
* AAA/AUTHOR/IKE: Processing AV service=ike
* AAA/AUTHOR/IKE: Processing AV protocol=ipsec
```

```

*
AAA/AUTHOR/IKE: Processing AV tunnel-password=cisco123
*
AAA/AUTHOR/IKE: Processing AV default-domain*cisco.com
*
AAA/AUTHOR/IKE: Processing AV addr-pool*ippool
*
AAA/AUTHOR/IKE: Processing AV key-exchange=ike
*
AAA/AUTHOR/IKE: Processing AV group-lock*0
*
AAA/AUTHOR/IKE: Processing AV timeout*0
*
AAA/AUTHOR/IKE: Processing AV idletime*0
*
AAA/AUTHOR/IKE: Processing AV inacl*108
*
AAA/AUTHOR/IKE: Processing AV dns-servers*10.1.1.10 0.0.0.0
*
AAA/AUTHOR/IKE: Processing AV wins-servers*10.1.1.20 0.0.0.0
*ISAKMP (0:1): attributes sent in message:
*   Address: 0.2.0.0
*ISAKMP (0:1): allocating address 10.16.20.1
*ISAKMP: Sending private address: 10.16.20.1
*ISAKMP: Sending IP4_DNS server address: 10.1.1.10
*ISAKMP: Sending IP4_NBNS server address: 10.1.1.20
*ISAKMP: Sending ADDRESS_EXPIRY seconds left to use the address: 86388
*ISAKMP: Sending APPLICATION_VERSION string: Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-IK9S-M), Version 12.2(15)T2,  RELEASE SOFTWARE (fc2)
TAC Support: http://www.cisco.com/tac
Copyright (c) 1986-2003 by cisco Systems, Inc.
Compiled Thu 01-May-03 10:39 by nmasa
*ISAKMP (0/1): Unknown Attr: UNKNOWN (0x7000)
*ISAKMP (0/1): Unknown Attr: UNKNOWN (0x7001)
*ISAKMP: Sending DEFAULT_DOMAIN default domain name: cisco.com
*ISAKMP: Sending split include name 108 network 172.18.124.0 mask 255.255.255.0
  protocol 0, src port 0, dst port 0

*ISAKMP (0/1): Unknown Attr: UNKNOWN (0x7003)
*ISAKMP (0/1): Unknown Attr: UNKNOWN (0x7007)
*ISAKMP (0/1): Unknown Attr: UNKNOWN (0x7008)
*ISAKMP (0/1): Unknown Attr: UNKNOWN (0x7009)
*ISAKMP (0/1): Unknown Attr: UNKNOWN (0x700A)
*ISAKMP (0/1): Unknown Attr: UNKNOWN (0x7005)
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*ISAKMP (0:1): responding to peer config from 10.0.0.1. ID = -1474156599
*CryptoEngi*ISAKMP (0:1): deleting node -1474156599 error FALSE reason
  "ne0: CRYPTO_ISA_IKE_ENCRYPT(hw)(ipsec)
*ISAKMP (0:1): sending packet to 10.0.0.1 my_por231
*ISAKMP (0:1): processing SA payload. message ID = 2058744231
*ISAKMP (0:1): Checking IPsec proposal 1
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-MD5
*ISAKMP:     encaps is 1
*ISAKMP:     key length is 256t 500 peer_port 500 (R) CONF_ADDR

*ISAKMP (0:1): Input = IKE_MSG_FROM_AAA, IKE_AAA_GROUP_ATTR
*ISAKMP (0:1): Old State = IKE_CONFIG_AUTHOR_AAA_AWAIT  New State = IKE_P1_COMPLETE

*AAA/MEMORY: free_user (0x831663A0) user='3000client' ruser='NULL' port='ISAKMP-GROUP-AUTH'
  rem_addr='10.0.0.1' authen_type=NONE service=LOGIN priv=0 vrf= (id=0)
*ISAKMP (0:1): received packet from 10.0.0.1 dport 500 sport 500 Global (R) QM_IDLE

```

```
*ISAKMP: set new node 2058744231 to QM_IDLE
*CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*ISAKMP (0:1): processing HASH payload. message ID = 2058744
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*ISAKMP (0:1): Checking IPSec proposal 1
*ISAKMP (0:1): transform 1, IPPCP LZS
*ISAKMP:  attributes in transform:
*ISAKMP:      encaps is 1
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes 256 esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x2
*IPSEC(validate_proposal_request): proposal part #2,
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
protocol= PCP, transform= comp-lzs ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
{esp-aes 256 esp-md5-hmac comp-lzs }
*ISAKMP (0:1): IPSec policy invalidated proposal
*ISAKMP (0:1): Checking IPSec proposal 2
*ISAKMP: transform 1, ESP_AES
*ISAKMP:  attributes in transform:
*ISAKMP:      authenticator is HMAC-SHA
*ISAKMP:      encaps is 1
*ISAKMP:      key length is 256
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*ISAKMP (0:1): Checking IPSec proposal 2
*ISAKMP (0:1): transform 1, IPPCP LZS
*ISAKMP:  attributes in transform:
*ISAKMP:      encaps is 1
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes 256 esp-sha-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x2
*IPSEC(validate_proposal_request): proposal part #2,
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
protocol= PCP, transform= comp-lzs ,
```

```
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
    {esp-aes 256 esp-sha-hmac comp-lzs }
*ISAKMP (0:1): IPsec policy invalidated proposal
*ISAKMP (0:1): Checking IPsec proposal 3
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-MD5
*ISAKMP:     encaps is 1
*ISAKMP:     key length is 128
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*ISAKMP (0:1): Checking IPsec proposal 3
*ISAKMP (0:1): transform 1, IPPCP LZS
*ISAKMP:   attributes in transform:
*ISAKMP:     encaps is 1
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x2
*IPSEC(validate_proposal_request): proposal part #2,
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
protocol= PCP, transform= comp-lzs ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
    {esp-aes esp-md5-hmac comp-lzs }
*ISAKMP (0:1): IPsec policy invalidated proposal
*ISAKMP (0:1): Checking IPsec proposal 4
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-SHA
*ISAKMP:     encaps is 1
*ISAKMP:     key length is 128
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*ISAKMP (0:1): Checking IPsec proposal 4
*ISAKMP (0:1): transform 1, IPPCP LZS
*ISAKMP:   attributes in transform:
*ISAKMP:     encaps is 1
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
```

```
    protocol= ESP, transform= esp-aes esp-sha-hmac ,
    lifedur= 0s and 0kb,
    spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x2
*IPSEC(validate_proposal_request): proposal part #2,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= PCP, transform= comp-lzs ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
  {esp-aes esp-sha-hmac comp-lzs }
*ISAKMP (0:1): IPsec policy invalidated proposal
*ISAKMP (0:1): Checking IPsec proposal 5
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-MD5
*ISAKMP:     encaps is 1
*ISAKMP:     key length is 256
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes 256 esp-md5-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
  {esp-aes 256 esp-md5-hmac }
*ISAKMP (0:1): IPsec policy invalidated proposal
*ISAKMP (0:1): Checking IPsec proposal 6
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-SHA
*ISAKMP:     encaps is 1
*ISAKMP:     key length is 256
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes 256 esp-sha-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
  {esp-aes 256 esp-sha-hmac }
*ISAKMP (0:1): IPsec policy invalidated proposal
*ISAKMP (0:1): Checking IPsec proposal 7
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-MD5
*ISAKMP:     encaps is 1
```

```
*ISAKMP:      key length is 128
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes esp-md5-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
  {esp-aes esp-md5-hmac }
*ISAKMP (0:1): IPSec policy invalidated proposal
*ISAKMP (0:1): Checking IPSec proposal 8
*ISAKMP: transform 1, ESP_AES
*ISAKMP:  attributes in transform:
*ISAKMP:      authenticator is HMAC-SHA
*ISAKMP:      encaps is 1
*ISAKMP:      key length is 128
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 10.1.1.1/255.255.255.255/0/0 (type=1),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes esp-sha-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
  {esp-aes esp-sha-hmac }
*ISAKMP (0:1): IPSec policy invalidated proposal
*ISAKMP (0:1): Checking IPSec proposal 9
*ISAKMP: transform 1, ESP_3DES
*ISAKMP:  attributes in transform:
*ISAKMP:      authenticator is HMAC-MD5
*ISAKMP:      encaps is 1
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*ISAKMP (0:1): Checking IPSec proposal 9
*ISAKMP (0:1): transform 1, IPPCP LZS
*ISAKMP:  attributes in transform:
*ISAKMP:      encaps is 1
*ISAKMP:      SA life type in seconds
*IPSEC(spi_response): getting spi 3233689542 for SA
  from 10.1.1.1 to 10.0.0.1 for prot 3
*ISAKMP: received ke message (2/1)
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw)(ipsec)
*ISAKMP (0:1): sending packet to 10.0.0.1 my_port 500 peer_port 500 (R) QM_IDLE
*ISAKMP (0:1): Node 2058744231, Input = IKE_MSG_FROM_IPSEC, IKE_SPI_REPLY
*ISAKMP (0:1): Old State = IKE_QM_SPI_STARVE New State = IKE_QM_R_QM2
*ISAKMP (0:1): received packet from 10.0.0.1 dport 500 sport 500 Global (R) QM_IDLE
*CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
```

```

*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*CryptoEngine0: ipsec allocate flow
*CryptoEngine0: ipsec allocate flow
*CryptoEngine0: CRYPTO_ISA_IPSEC_KEY_CREATE(hw)(ipsec)
*CryptoEngine0: CRYPTO_ISA_IPSEC_KEY_CREATE(hw)(ipsec)
*ISAKMP: Locking peer struct 0x83166B20, IPSEC refcount 1 for for stuff_ke
  !--- A matching IPsec policy has been negotiated and authenticated. !--- Next, the SA's are set
up. *ISAKMP (0:1): Creating IPsec SAs
*
  inbound SA from 10.0.0.1 to 10.1.1.1 (f/i) 0/ 0
  (proxy 10.16.20.1 to 10.1.1.1)
*
  has spi 0xC0BE2FC6 and conn_id 420 and flags 2
*
  lifetime of 2147483 seconds
*
  has client flags 0x0
*
  outbound SA from 10.1.1.1 to 10.0.0.1 (f/i) 0/ 0
  (proxy 10.1.1.1 to 10.16.20.1 )
*ISAKMP (0:1): received packet from 10.0.0.1 dport 500 sport 500 Global (R) QM_IDLE
*ISAKMP: set new node 1101355775 to QM_IDLE
*CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*ISAKMP (0:1): processing HASH payload. message ID = 1101355775
*ISAKMP (0:1): processing SA payload. message ID = 1101355775
*ISAKMP (0:1): Checking IPsec proposal 1
*ISAKMP: transform 1, ESP_AES
*ISAKMP: attributes in transform:
*ISAKMP: authenticator is HMAC-MD5
*ISAKMP: encaps is 1
*ISAKMP: key length is 256
*ISAKMP: SA life type in seconds
*ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*ISAKMP (0:1): Checking IPsec proposal 1
*ISAKMP (0:1): transform 1, IPPCP LZS
*ISAKMP: attributes in transform:
*ISAKMP: encaps is 1
*ISAKMP: SA life type in seconds
*ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes 256 esp-md5-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x2
*IPSEC(validate_proposal_request): proposal part #2,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= PCP, transform= comp-lzs ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
  {esp-aes 256 esp-md5-hmac comp-lzs }
*ISAKMP (0:1): IPsec policy invalidated proposal
*ISAKMP (0:1): Checking IPsec proposal 2
*ISAKMP: transform 1, ESP_AES
*ISAKMP: attributes in transform:
*ISAKMP: authenticator is HMAC-SHA

```



```
*ISAKMP:      encaps is 1
*ISAKMP:      key length is 256
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*ISAKMP (0:1): Checking IPsec proposal 2
*ISAKMP (0:1): transform 1, IPPCP LZS
*ISAKMP:      attributes in transform:
*ISAKMP:      encaps is 1
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes 256 esp-sha-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x2
*IPSEC(validate_proposal_request): proposal part #2,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= PCP, transform= comp-lzs ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
  {esp-aes 256 esp-sha-hmac comp-lzs }
*ISAKMP (0:1): IPsec policy invalidated proposal
*ISAKMP (0:1): Checking IPsec proposal 3
*ISAKMP: transform 1, ESP_AES
*ISAKMP:      attributes in transform:
*ISAKMP:      authenticator is HMAC-MD5
*ISAKMP:      encaps is 1
*ISAKMP:      key length is 128
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*ISAKMP (0:1): Checking IPsec proposal 3
*ISAKMP (0:1): transform 1, IPPCP LZS
*ISAKMP:      attributes in transform:
*ISAKMP:      encaps is 1
*ISAKMP:      SA life type in seconds
*ISAKMP:      SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes esp-md5-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x2
*IPSEC(validate_proposal_request): proposal part #2,
  (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
  local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
  remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
  protocol= PCP, transform= comp-lzs ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x2
```

```
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
    {esp-aes esp-md5-hmac comp-lzs }
*ISAKMP (0:1): IPSec policy invalidated proposal
*ISAKMP (0:1): Checking IPSec proposal 4
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-SHA
*ISAKMP:     encaps is 1
*ISAKMP:     key length is 128
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*ISAKMP (0:1): Checking IPSec proposal 4
*ISAKMP (0:1): transform 1, IPPCP LZS
*ISAKMP:   attributes in transform:
*ISAKMP:     encaps is 1
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
    (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
    local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
    protocol= ESP, transform= esp-aes esp-sha-hmac ,
    lifedur= 0s and 0kb,
    spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x2
*IPSEC(validate_proposal_request): proposal part #2,
    (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
    local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
    protocol= PCP, transform= comp-lzs ,
    lifedur= 0s and 0kb,
    spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
    {esp-aes esp-sha-hmac comp-lzs }
*ISAKMP (0:1): IPSec policy invalidated proposal
*ISAKMP (0:1): Checking IPSec proposal 5
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-MD5
*ISAKMP:     encaps is 1
*ISAKMP:     key length is 256
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
    (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
    local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
    protocol= ESP, transform= esp-aes 256 esp-md5-hmac ,
    lifedur= 0s and 0kb,
    spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
```

```

    {esp-aes 256 esp-md5-hmac }
*ISAKMP (0:1): IPSec policy invalidated proposal
*ISAKMP (0:1): Checking IPSec proposal 6
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-SHA
*ISAKMP:     encaps is 1
*ISAKMP:     key length is 256
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
    (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
    local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
    protocol= ESP, transform= esp-aes 256 esp-sha-hmac ,
    lifedur= 0s and 0kb,
    spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
    {esp-aes 256 esp-sha-hmac }
*ISAKMP (0:1): IPSec policy invalidated proposal
*ISAKMP (0:1): Checking IPSec proposal 7
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-MD5
*ISAKMP:     encaps is 1
*ISAKMP:     key length is 128
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*IPSEC(validate_proposal_request): proposal part #1,
    (key eng. msg.) INBOUND local= 10.1.1.1, remote= 10.0.0.1,
    local_proxy= 172.18.124.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.16.20.1/255.255.255.255/0/0 (type=1),
    protocol= ESP, transform= esp-aes esp-md5-hmac ,
    lifedur= 0s and 0kb,
    spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x2
*CryptoEngine0: validate proposal request
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(kei_proxy): head = clientmap, map->ivrf = , kei->ivrf =
*IPSEC(validate_transform_proposal): transform proposal not supported for identity:
    {esp-aes esp-md5-hmac }
*ISAKMP (0:1): IPSec policy invalidated proposal
*ISAKMP (0:1): Checking IPSec proposal 8
*ISAKMP: transform 1, ESP_AES
*ISAKMP:   attributes in transform:
*ISAKMP:     authenticator is HMAC-SHA
*ISAKMP:     encaps is 1
*ISAKMP:     key length is 128
*ISAKMP:     SA life type in seconds
*ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*CryptoEngine0: validate proposal
*ISAKMP (0:1): atts are acceptable.
*IPSEC(spi_response): getting spi 3438126624 for SA
    from 10.1.1.1 to 10.0.0.1 for prot 3
*ISAKMP: received ke message (2/1)
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw)(ipsec)

```

```

*ISAKMP (0:1): sending packet to 10.0.0.1 my_port 500 peer_port 500 (R) QM_IDLE
*ISAKMP (0:1): Node 1101355775, Input = IKE_MSG_FROM_IPSEC, IKE_SPI_REPLY
*ISAKMP (0:1): Old State = IKE_QM_SPI_STARVE New State = IKE_QM_R_QM2
*ISAKMP (0:1): received packet from 10.0.0.1 dport 500 sport 500 Global (R) QM_IDLE
*CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
*CryptoEngine0: generate hmac context for conn id 1
*CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
*CryptoEngine0: ipsec allocate flow
*CryptoEngine0: ipsec allocate flow
*CryptoEngine0: CRYPTO_ISA_IPSEC_KEY_CREATE(hw)(ipsec)
*CryptoEngine0: CRYPTO_ISA_IPSEC_KEY_CREATE(hw)(ipsec)
*ISAKMP: Locking peer struct 0x83166B20, IPSEC refcount 2 for for stuff_ke
*ISAKMP (0:1): Creating IPSec SAs
*
  inbound SA from 10.0.0.1 to 10.1.1.1 (f/i)  0/ 0
(proxy 10.16.20.1 to 172.18.124.0)
*
  has spi 0xCCEDA620 and conn_id 422 and flags 2
*
  lifetime of 2147483 seconds
*
  has client flags 0x0
*
  outbound SA from 10.1.1.1 to 10.0.0.1      (f/i)  0/ 0
(proxy 172.18.124.0          to 10.16.20.1    )

```

[Journaux client](#)

Lancez LogViewer sur le client VPN afin d'afficher les journaux. Assurez-vous que le filtre est défini sur High pour toutes les classes configurées. Voici un exemple de sortie de journal :

```

1      16:52:27.031  06/18/03  Sev=Info/6      DIALER/0x63300002
Initiating connection.

2      16:52:27.041  06/18/03  Sev=Info/4      CM/0x63100002
Begin connection process

3      16:52:27.051  06/18/03  Sev=Info/4      CM/0x63100004
Establish secure connection using Ethernet

4      16:52:27.051  06/18/03  Sev=Info/4      CM/0x63100024
Attempt connection with server "10.1.1.1"

5      16:52:27.101  06/18/03  Sev=Info/6      IKE/0x6300003B
Attempting to establish a connection with 10.1.1.1.

6      16:52:27.481  06/18/03  Sev=Info/4      IKE/0x63000013
SENDING >>> ISAKMP OAK AG (SA, KE, NON, ID, VID, VID, VID, VID, VID)
to 10.1.1.1

7      16:52:27.612  06/18/03  Sev=Info/4      IPSEC/0x63700014
Deleted all keys

8      16:52:27.722  06/18/03  Sev=Info/5      IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

9      16:52:27.722  06/18/03  Sev=Info/4      IKE/0x63000014
RECEIVING <<< ISAKMP OAK AG (SA, VID, VID, VID, VID, VID, KE, ID, NON, HASH, NAT-D, NAT-D)
from 10.1.1.1

10     16:52:27.722  06/18/03  Sev=Info/5      IKE/0x63000059
Vendor ID payload = 12F5F28C457168A9702D9FE274CC0100

11     16:52:27.722  06/18/03  Sev=Info/5      IKE/0x63000001
Peer is a Cisco-Unity compliant peer

12     16:52:27.722  06/18/03  Sev=Info/5      IKE/0x63000059

```

Vendor ID payload = AFCAD71368A1F1C96B8696FC77570100

13 16:52:27.722 06/18/03 Sev=Info/5 IKE/0x63000001
Peer supports DPD

14 16:52:27.722 06/18/03 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 4F6CF9393C7749D894C6C92D2131AE04

15 16:52:27.722 06/18/03 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 09002689DFD6B712

16 16:52:27.722 06/18/03 Sev=Info/5 IKE/0x63000001
Peer supports XAUTH

17 16:52:27.722 06/18/03 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 90CB80913EBB696E086381B5EC427B1F

18 16:52:27.722 06/18/03 Sev=Info/5 IKE/0x63000001
Peer supports NAT-T

19 16:52:27.782 06/18/03 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK AG *(HASH, NOTIFY:STATUS_INITIAL_CONTACT, NAT-D, NAT-D)
to 10.1.1.1

20 16:52:27.822 06/18/03 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

21 16:52:27.822 06/18/03 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK INFO *(HASH, NOTIFY:STATUS_RESP_LIFETIME)
from 10.1.1.1

22 16:52:27.822 06/18/03 Sev=Info/5 IKE/0x63000044
RESPONDER-LIFETIME notify has value of 86400 seconds

23 16:52:27.822 06/18/03 Sev=Info/5 IKE/0x63000046
This SA has already been alive for 0 seconds, setting expiry to 86400 seconds from now

24 16:52:27.842 06/18/03 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

25 16:52:27.842 06/18/03 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 10.1.1.1

26 16:52:27.842 06/18/03 Sev=Info/4 CM/0x63100015
Launch xAuth application

27 16:52:32.449 06/18/03 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

28 16:52:32.449 06/18/03 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(Retransmission) from 10.1.1.1

29 16:52:32.809 06/18/03 Sev=Info/4 CM/0x63100017
xAuth application returned

30 16:52:32.809 06/18/03 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 10.1.1.1

31 16:52:37.626 06/18/03 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

32 16:52:37.636 06/18/03 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 10.1.1.1

33 16:52:37.636 06/18/03 Sev=Info/5 IKE/0x63000071
Automatic NAT Detection Status:
Remote end is NOT behind a NAT device
This end is NOT behind a NAT device

34 16:52:37.636 06/18/03 Sev=Info/4 CM/0x6310000E
Established Phase 1 SA. 1 Phase 1 SA in the system

35 16:52:37.656 06/18/03 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 10.1.1.1

36 16:52:37.987 06/18/03 Sev=Info/5 IKE/0x6300005D
Client sending a firewall request to concentrator

37 16:52:37.987 06/18/03 Sev=Info/5 IKE/0x6300005C
Firewall Policy: Product=Cisco Integrated Client, Capability=
(Centralized Protection Policy).

38 16:52:38.007 06/18/03 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 10.1.1.1

39 16:52:38.087 06/18/03 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

40 16:52:38.087 06/18/03 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 10.1.1.1

41 16:52:38.097 06/18/03 Sev=Info/5 IKE/0x63000010
MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_ADDRESS: , value = 10.16.20.1

42 16:52:38.097 06/18/03 Sev=Info/5 IKE/0x63000010
MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_DNS(1): , value = 10.1.1.10

43 16:52:38.097 06/18/03 Sev=Info/5 IKE/0x63000010
MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_NBNS(1) (a.k.a. WINS) : , value = 10.1.1.20

44 16:52:38.097 06/18/03 Sev=Info/5 IKE/0xA3000017
MODE_CFG_REPLY: The received (INTERNAL_ADDRESS_EXPIRY) attribute and value (86388)
is not supported

45 16:52:38.097 06/18/03 Sev=Info/5 IKE/0x6300000E
MODE_CFG_REPLY: Attribute = APPLICATION_VERSION, value = Cisco Internetwork
Operating System Software IOS (tm) C2600 Software (C2600-IK9S-M), Version 12.2(15)T2,
RELEASE SOFTWARE (fc2)
TAC Support: <http://www.cisco.com/tac>
Copyright (c) 1986-2003 by cisco Systems, Inc.
Compiled Thu 01-May-03 10:39 by nmasa

46 16:52:38.097 06/18/03 Sev=Info/5 IKE/0x6300000E
MODE_CFG_REPLY: Attribute = MODECFG_UNITY_DEFDOMAIN: , value = cisco.com

47 16:52:38.097 06/18/03 Sev=Info/5 IKE/0x6300000D
MODE_CFG_REPLY: Attribute = MODECFG_UNITY_SPLIT_INCLUDE (# of split_nets),
value = 0x00000001

48 16:52:38.097 06/18/03 Sev=Info/5 IKE/0x6300000F
SPLIT_NET #1
subnet = 172.18.124.0
mask = 255.255.255.0
protocol = 0
src port = 0
dest port=0

49 16:52:38.097 06/18/03 Sev=Info/4 CM/0x63100019

Mode Config data received

50 16:52:38.347 06/18/03 Sev=Info/5 IKE/0x63000055

Received a key request from Driver for IP address 10.1.1.1,
GW IP = 10.1.1.1

51 16:52:38.347 06/18/03 Sev=Info/4 IKE/0x63000013

SENDING >>> ISAKMP OAK QM *(HASH, SA, NON, ID, ID) to 10.1.1.1

52 16:52:38.728 06/18/03 Sev=Info/5 IKE/0x6300002F

Received ISAKMP packet: peer = 10.1.1.1

53 16:52:38.728 06/18/03 Sev=Info/4 IKE/0x63000014

RECEIVING <<< ISAKMP OAK QM *(HASH, SA, NON, ID, ID, NOTIFY:STATUS_RESP_LIFETIME)
from 10.1.1.1

54 16:52:38.738 06/18/03 Sev=Info/5 IKE/0x63000044

RESPONDER-LIFETIME notify has value of 3600 seconds

55 16:52:38.738 06/18/03 Sev=Info/5 IKE/0x63000045

RESPONDER-LIFETIME notify has value of 4608000 kb

56 16:52:38.738 06/18/03 Sev=Info/4 IKE/0x63000013

SENDING >>> ISAKMP OAK QM *(HASH) to 10.1.1.1

57 16:52:38.738 06/18/03 Sev=Info/5 IKE/0x63000058

Loading IPsec SA (Message ID = 0x7AB5F1A7 OUTBOUND SPI = 0xC0BE2FC6
INBOUND SPI = 0x56FFC535)

58 16:52:38.788 06/18/03 Sev=Info/5 IKE/0x63000025

Loaded OUTBOUND ESP SPI: 0xC0BE2FC6

59 16:52:38.798 06/18/03 Sev=Info/5 IKE/0x63000026

Loaded INBOUND ESP SPI: 0x56FFC535

60 16:52:38.798 06/18/03 Sev=Info/4 CM/0x6310001A

One secure connection established

61 16:52:38.828 06/18/03 Sev=Info/6 DIALER/0x63300003

Connection established.

62 16:52:38.868 06/18/03 Sev=Info/6 CVPND/0x63400011

Found matching adapter

63 16:52:38.968 06/18/03 Sev=Info/6 CVPND/0x63400011

Found matching adapter

64 16:52:39.819 06/18/03 Sev=Info/4 CM/0x63100037

Address watch added for 10.0.0.1. Current address(es): 10.0.0.1.

65 16:52:40.280 06/18/03 Sev=Info/4 IPSEC/0x63700014

Deleted all keys

66 16:52:40.280 06/18/03 Sev=Info/4 IPSEC/0x63700010

Created a new key structure

67 16:52:40.290 06/18/03 Sev=Info/4 IPSEC/0x6370000F

Added key with SPI=0xc62fbec0 into key list

68 16:52:40.290 06/18/03 Sev=Info/4 IPSEC/0x63700010

Created a new key structure

69 16:52:40.290 06/18/03 Sev=Info/4 IPSEC/0x6370000F

Added key with SPI=0x35c5ff56 into key list

70 16:52:41.562 06/18/03 Sev=Info/6 DIALER/0x63300008
MAPI32 Information - Outlook not default mail client

71 16:52:54.230 06/18/03 Sev=Info/5 IKE/0x63000055
Received a key request from Driver for IP address 1.1.1.2, GW IP = 10.1.1.1

72 16:52:54.250 06/18/03 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH, SA, NON, ID, ID) to 10.1.1.1

73 16:52:54.731 06/18/03 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 10.1.1.1

74 16:52:54.731 06/18/03 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK QM *(HASH, SA, NON, ID, ID, NOTIFY:STATUS_RESP_LIFETIME)
from 10.1.1.1

75 16:52:54.741 06/18/03 Sev=Info/5 IKE/0x63000044
RESPONDER-LIFETIME notify has value of 3600 seconds

76 16:52:54.741 06/18/03 Sev=Info/5 IKE/0x63000045
RESPONDER-LIFETIME notify has value of 4608000 kb

77 16:52:54.741 06/18/03 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH) to 10.1.1.1

78 16:52:54.741 06/18/03 Sev=Info/5 IKE/0x63000058
Loading IPsec SA (Message ID = 0x41A55AFF OUTBOUND SPI = 0xCCEDA620
INBOUND SPI = 0x0C5B3DB2)

79 16:52:54.771 06/18/03 Sev=Info/5 IKE/0x63000025
Loaded OUTBOUND ESP SPI: 0xCCEDA620

80 16:52:54.781 06/18/03 Sev=Info/5 IKE/0x63000026
Loaded INBOUND ESP SPI: 0x0C5B3DB2

81 16:52:54.781 06/18/03 Sev=Info/4 CM/0x63100021
Additional Phase 2 SA established.

82 16:52:55.472 06/18/03 Sev=Info/4 IPSEC/0x63700010
Created a new key structure

83 16:52:55.472 06/18/03 Sev=Info/4 IPSEC/0x6370000F
Added key with SPI=0x20a6edcc into key list

84 16:52:55.472 06/18/03 Sev=Info/4 IPSEC/0x63700010
Created a new key structure

85 16:52:55.472 06/18/03 Sev=Info/4 IPSEC/0x6370000F
Added key with SPI=0xb23d5b0c into key list

86 16:52:55.472 06/18/03 Sev=Info/4 IPSEC/0x63700019
Activate outbound key with SPI=0x20a6edcc for inbound key with SPI=0xb23d5b0c

[Informations connexes](#)

- [Page prise en charge de la technologie RADIUS](#)
- [Page de support de la négociation IPsec/des protocoles IKE](#)
- [Cisco VPN Client Support Page](#)
- [Request For Comments \(RFC\)](#)
- [Support et documentation techniques - Cisco Systems](#)