

OSPF-niet zo uitgebreid gebied type 7 tot type 5 Link-Staat conversie van advertenties

Inhoud

[Inleiding](#)

[Voorwaarden](#)

[Vereisten](#)

[Gebruikte componenten](#)

[Conventies](#)

[Configureren](#)

[Netwerkdigram](#)

[Configuraties](#)

[Verifiëren](#)

[Onderzoek de OSPF-database](#)

[Problemen oplossen](#)

[Gerelateerde informatie](#)

[Inleiding](#)

Dit document toont hoe Open Snelst Path First (OSPF) een Not So Stubby Area (NSSA) type 7 link-state advertentie (LSA) converteert naar een type 5 LSA.

[Voorwaarden](#)

[Vereisten](#)

Er zijn geen specifieke vereisten van toepassing op dit document.

[Gebruikte componenten](#)

Dit document is niet beperkt tot specifieke software- en hardware-versies.

[Conventies](#)

Raadpleeg [Cisco Technical Tips Conventions \(Conventies voor technische tips van Cisco\)](#) voor meer informatie over documentconventies.

[Configureren](#)


Deze sectie bevat informatie over het configureren van de functies die in dit document worden

beschreven.

N.B.: Als u aanvullende informatie wilt vinden over de opdrachten in dit document, gebruikt u het [Opdrachtplanningprogramma](#) (alleen [geregistreerd](#) klanten).

Netwerkdigram

Dit document gebruikt de netwerkinstellingen die in dit diagram worden weergegeven.

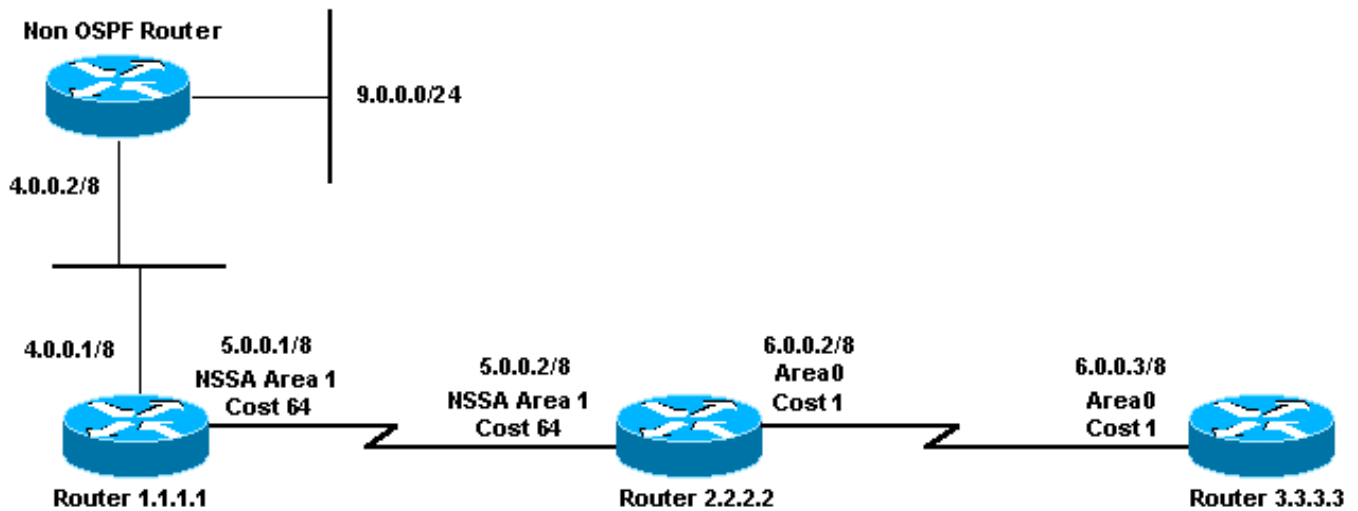

Configuraties

Dit document gebruikt de configuraties die hier worden weergegeven.

- [router 1.1.1.1](#)
- [router 2.2.2.2](#)
- [router 3.3.3.3](#)

router 1.1.1.1

Current configuration:

```
hostname r1.1.1.1

interface Loopback0
 ip address 1.1.1.1 255.0.0.0

interface Serial2/1/0
 ip address 5.0.0.1 255.0.0.0

interface Ethernet2/0/0
 ip address 4.0.0.1 255.0.0.0

router ospf 4
 redistribute static metric 5 metric-type 1
 network 5.0.0.0 0.255.255.255 area 1
 network 4.0.0.0 0.255.255.255 area 1
 area 1 nssa

ip route 9.0.0.0 255.0.0.0 4.0.0.2
```

end
router 2.2.2.2
Current configuration: hostname r2.2.2.2 interface Loopback0 ip address 2.2.2.2 255.0.0.0 interface Serial0/1/0 ip address 5.0.0.2 255.0.0.0 interface ATM1/0.20 ip address 6.0.0.2 255.0.0.0 router ospf 2 network 5.0.0.0 0.255.255.255 area 1 network 6.0.0.0 0.255.255.255 area 0 area 1 nssa end
router 3.3.3.3
Current configuration: hostname r3.3.3.3 interface Loopback0 ip address 3.3.3.3 255.0.0.0 interface ATM2/0.20 point-to-point ip address 6.0.0.3 255.0.0.0 router ospf 2 network 6.0.0.0 0.255.255.255 area 0 end

Verifiëren

Deze sectie verschaft informatie die u kunt gebruiken om te bevestigen dat uw configuratie correct werkt.

Bepaalde opdrachten met **show** worden ondersteund door de tool [Output Interpreter \(alleen voor geregistreerde klanten\)](#). Hiermee kunt u een analyse van de output van opdrachten met **show** genereren.

- [ip ospf database](#)-hiermee wordt een lijst van LSA's weergegeven en typt ze in een database van de verbindingstaat. Deze lijst geeft alleen de informatie in de LSA header weer.
- **Toon ip ospf gegevensbank nssa-extern**-de informatie van de Beeldingen slechts over de externe LSAs van NSSA.
- **ip ospf database extern**-displays alleen informatie over de externe LSA's tonen.
- **Toon ip ospf database [router] [link-staat-id]**—Hier wordt een lijst weergegeven van alle LSA's van een router in de database. LSA's worden geproduceerd door elke router, en deze

fundamentele LSA's maken een lijst van alle verbindingen, of interfaces, samen met de staten en de uitgaande kosten van de verbindingen. Ze worden alleen overstromd in het gebied waar ze vandaan komen.

- **Toon ip ospf gegevensbestand samenvatting <link-staat id>** —Hiermee geeft u de summierende links van de gebiedskader router (ABR) weer.
- **[toon ip route](#)**-Toont de huidige status van de routingtabel.

Onderzoek de OSPF-database

Om te zien hoe de OSPF-database deze netwerkomgeving ziet, gebruikt u de opdracht **ip ospf-database tonen**.

```
r2.2.2.2#show ip ospf database
```

```
OSPF Router with ID (2.2.2.2) (Process ID 2)
```

```
Router Link States (Area 0)
```

Link ID	ADV Router	Age	Seq#	Checksum	Link count
2.2.2.2	2.2.2.2	1235	0x8000001D	0xD9FF	2
3.3.3.3	3.3.3.3	1100	0x8000000B	0x9455	2

```
Summary Net Link States (Area 0)
```

Link ID	ADV Router	Age	Seq#	Checksum
4.0.0.0	2.2.2.2	1979	0x80000002	0xFDE7
5.0.0.0	2.2.2.2	1483	0x80000004	0x8864

```
Router Link States (Area 1)
```

Link ID	ADV Router	Age	Seq#	Checksum	Link count
1.1.1.1	1.1.1.1	319	0x8000000C	0xAFA8	3
2.2.2.2	2.2.2.2	220	0x8000002F	0xD478	2

```
Summary Net Link States (Area 1)
```

Link ID	ADV Router	Age	Seq#	Checksum
6.0.0.0	2.2.2.2	1483	0x8000001C	0x7894

```
Type-7 AS External Link States (Area 1)
```

Link ID	ADV Router	Age	Seq#	Checksum	Tag
9.0.0.0	1.1.1.1	334	0x80000005	0xD738	0

```
Type-5 AS External Link States
```

Link ID	ADV Router	Age	Seq#	Checksum	Tag
9.0.0.0	2.2.2.2	1725	0x80000004	0x50C6	0

Om externe routes in een NSSA te adverteren, creëert de autonome systeem grensrouter (ASBR) nssa-externe LSAs (type 7).

```
r2.2.2.2#show ip ospf database nssa-external 9.0.0.0
```

```
OSPF Router with ID (2.2.2.2) (Process ID 2)
```

```
Type-7 AS External Link States (Area 1)
```

```
Routing Bit Set on this LSA
LS age: 381
Options: (No TOS-capability, Type 7/5 translation, DC)
!--- This can be translated into a type 5 LSA by !--- an ABR. LS Type: AS External Link Link
State ID: 9.0.0.0 (External Network Number ) !--- The ASBR (Router 1.1.1.1) advertises !---
9.0.0.0/8. Advertising Router: 1.1.1.1 !--- Router ID of the ASBR. LS Seq Number: 80000005
Checksum: 0xD738 Length: 36 Network Mask: /8 Metric Type: 1 (Comparable directly to link state
metric) TOS: 0 Metric: 5 Forward Address: 4.0.0.1 !--- Forwarding address is incorrectly
specified !--- as an interface on the ASBR.
```

ABR converteert type 7 LSA's naar type 5 LSA's en verspreidt het type 5 LSA's in normale gebieden.

```
r2.2.2.2#show ip ospf database external 9.0.0.0
```

```
OSPF Router with ID (2.2.2.2) (Process ID 2)
```

```
Type-5 AS External Link States
```

```
LS age: 1782
Options: (No TOS-capability, DC)
LS Type: AS External Link
Link State ID: 9.0.0.0 (External Network Number )
!--- Router 2.2.2.2 advertises 9.0.0.0/8. Advertising Router: 2.2.2.2 !--- When the conversion
is complete, the advertising !--- router ID becomes the ABR router ID !--- because the ABR
originates this type 5 LSA. LS Seq Number: 80000004 Checksum: 0x50C6 Length: 36 Network Mask: /8
Metric Type: 1 (Comparable directly to link state metric) TOS: 0 Metric: 5 Forward Address:
4.0.0.1 External Route Tag: 0 r2.2.2.2#show ip ospf database router 1.1.1.1
```

```
OSPF Router with ID (2.2.2.2) (Process ID 2)
```

```
Router Link States (Area 1)
```

```
Routing Bit Set on this LSA
LS age: 426
Options: (No TOS-capability, DC)
LS Type: Router Links
Link State ID: 1.1.1.1
!--- For router links, Link State ID is always the same !--- as the advertising router (next
line). Advertising Router: 1.1.1.1 LS Seq Number: 8000000C Checksum: 0xAFA8 Length: 60 AS
Boundary Router !--- Bit E in the router LSA indicates that this router !--- originates from
external LSAs. Number of Links: 3 !--- There are three links in area 1. Link connected to: a
Stub Network !--- This represents the Ethernet segment 4.0.0.0/8. (Link ID) Network/subnet
number: 4.0.0.0 (Link Data) Network Mask: 255.0.0.0 Number of TOS metrics: 0 TOS 0 Metrics: 10
!--- The OSPF cost of the Ethernet segment. Link connected to: another Router (point-to-point)
!--- Shows that Router 1.1.1.1 is a neighbor with !--- Router 2.2.2.2. (Link ID) Neighboring
Router ID: 2.2.2.2 (Link Data) Router Interface address: 5.0.0.1 !--- The interface address that
connects to Router !--- 2.2.2.2 is 5.0.0.1. Number of TOS metrics: 0 TOS 0 Metrics: 64 !--- The
OSPF cost of the link that connects !--- the two routers. Link connected to: a Stub Network !---
This represents the serial link 5.0.0.0/8. (Link ID) Network/subnet number: 5.0.0.0 (Link Data)
Network Mask: 255.0.0.0 Number of TOS metrics: 0 TOS 0 Metrics: 64 !--- The OSPF cost of the
serial link.
```

U kunt aan de dikke uitvoer hier zien dat hoewel router 2.2.2.2 geen herverdelings uitspraken in zijn configuratie heeft, het nog een ASBR is omdat het type 7 LSAs in type 5 LSAs converteert.

```
r2.2.2.2#show ip ospf database router 2.2.2.2
```

```
OSPF Router with ID (2.2.2.2) (Process ID 2)
```

```
Router Link States (Area 0)
```

LS age: 1361
Options: (No TOS-capability, DC)
LS Type: Router Links
Link State ID: 2.2.2.2
Advertising Router: 2.2.2.2
LS Seq Number: 8000001D
Checksum: 0xD9FF
Length: 48
Area Border Router

!--- Bit B is set in the router LSA to indicate !--- that this router is an ABR. AS Boundary Router

!--- Bit E in the router LSA indicates that this router !--- originates from external LSAs.
Number of Links: 2 *!--- There are two links in area 0.* Link connected to: another Router (point-to-point) (Link ID) Neighboring Router ID: 3.3.3.3 (Link Data) Router Interface address: 6.0.0.2
Number of TOS metrics: 0 TOS 0 Metrics: 1 Link connected to: a Stub Network (Link ID)
Network/subnet number: 6.0.0.0 (Link Data) Network Mask: 255.0.0.0 Number of TOS metrics: 0 TOS 0 Metrics: 1 Router Link States (Area 1) LS age: 346 Options: (No TOS-capability, DC) LS Type: Router Links Link State ID: 2.2.2.2 Advertising Router: 2.2.2.2 LS Seq Number: 8000002F
Checksum: 0xD478 Length: 48 Area Border Router AS Boundary Router Number of Links: 2 Link connected to: another Router (point-to-point) (Link ID) Neighboring Router ID: 1.1.1.1 (Link Data) Router Interface address: 5.0.0.2 Number of TOS metrics: 0 TOS 0 Metrics: 64 Link connected to: a Stub Network (Link ID) Network/subnet number: 5.0.0.0 (Link Data) Network Mask: 255.0.0.0 Number of TOS metrics: 0 TOS 0 Metrics: 64 r2.2.2.2#**show ip ospf database router 3.3.3.3**

OSPF Router with ID (2.2.2.2) (Process ID 2)

Router Link States (Area 0)

LS age: 1245
Options: (No TOS-capability, DC)
LS Type: Router Links
Link State ID: 3.3.3.3
Advertising Router: 3.3.3.3
LS Seq Number: 8000000B
Checksum: 0x9455
Length: 48
Number of Links: 2

Link connected to: another Router (point-to-point)
(Link ID) Neighboring Router ID: 2.2.2.2
(Link Data) Router Interface address: 6.0.0.3
Number of TOS metrics: 0
TOS 0 Metrics: 1

Link connected to: a Stub Network
(Link ID) Network/subnet number: 6.0.0.0
(Link Data) Network Mask: 255.0.0.0
Number of TOS metrics: 0
TOS 0 Metrics: 1

Om routes van het ene gebied naar het andere bekend te maken, creëert het ABR beknopte LSA's (type 3).

r2.2.2.2#**show ip ospf database summary 4.0.0.0**

OSPF Router with ID (2.2.2.2) (Process ID 2)

Summary Net Link States (Area 0)

LS age: 172
Options: (No TOS-capability, DC)
LS Type: Summary Links(Network)

```
Link State ID: 4.0.0.0 (summary Network Number)
!--- The ABR (Router 2.2.2.2) advertises !--- 4.0.0.0/8 into area 0. Advertising Router:
2.2.2.2 LS Seq Number: 80000003 Checksum: 0xFBE8 Length: 28 Network Mask: /8 TOS: 0 Metric: 74
r2.2.2.2#show ip ospf database summary 5.0.0.0
```

```
OSPF Router with ID (2.2.2.2) (Process ID 2)
```

```
Summary Net Link States (Area 0)
```

```
LS age: 1687
Options: (No TOS-capability, DC)
LS Type: Summary Links(Network)
Link State ID: 5.0.0.0 (summary Network Number)
!--- The ABR (Router 2.2.2.2) advertises !--- 5.0.0.0/8 into area 0. Advertising Router:
2.2.2.2 LS Seq Number: 80000004 Checksum: 0x8864 Length: 28 Network Mask: /8 TOS: 0 Metric: 64
r2.2.2.2#show ip ospf database summary 6.0.0.0
```

```
OSPF Router with ID (2.2.2.2) (Process ID 2)
```

```
Summary Net Link States (Area 1)
```

```
LS age: 1697
Options: (No TOS-capability, DC)
LS Type: Summary Links(Network)
Link State ID: 6.0.0.0 (summary Network Number)
!--- The ABR (Router 2.2.2.2) advertises !--- 6.0.0.0/8 into area 1. Advertising Router:
2.2.2.2 LS Seq Number: 8000001C Checksum: 0x7894 Length: 28 Network Mask: /8 TOS: 0 Metric: 1
```

De ASBR-synthese LSA's zijn in dit geval niet nodig omdat het ABR afkomstig is van de externe LSA en het ABR bereikbaar is binnen gebied 0. Vergelijk dit voorbeeld met een scenario waarin de NSSA een normaal gebied was door te kijken naar het gegevensbestand voorbeeld [Hoe OSPF externe Routes in meerdere gebieden verspreidt](#).

Deze routingtabeluitvoer toont de verschillende typen OSPF-routes die 9.0.0 door elke router bekend zijn.

```
r1.1.1.1#show ip route 9.0.0.0
Routing entry for 9.0.0.0/8
  Known via "static", distance 1, metric 0
  Redistributing via ospf 4
  Advertised by ospf 4 metric 5 metric-type 1
  Routing Descriptor Blocks:
  * 4.0.0.2
    Route metric is 0, traffic share count is 1

r2.2.2.2#show ip route ospf
O   4.0.0.0/8 [110/74] via 5.0.0.1, 01:10:13, Serial0/1/0
O N1 9.0.0.0/8 [110/79] via 5.0.0.1, 01:07:20, Serial0/1/0

R3.3.3.3#show ip route ospf
O IA 4.0.0.0/8 [110/75] via 6.0.0.2, 02:11:14, ATM2/0.20
O IA 5.0.0.0/8 [110/65] via 6.0.0.2, 03:10:41, ATM2/0.20
O E1 9.0.0.0/8 [110/80] via 6.0.0.2, 02:08:11, ATM2/0.20
```

Problemen oplossen

Er is momenteel geen specifieke troubleshooting-informatie beschikbaar voor deze configuratie.

Gerelateerde informatie

- [Hoe OSPF externe routers in meerdere gebieden doorgeeft](#)
- [OSPF-Databaseverklaring](#)
- [OSPF-technologie-ondersteuning](#)
- [Ondersteuningspagina voor IP-routing](#)
- [Technische ondersteuning en documentatie – Cisco Systems](#)