

# Konfigurationsbeispiel für WPA2-PSK und offene Authentifizierung mit Cisco 5760 WLC

## Inhalt

[Einführung](#)

[Voraussetzungen](#)

[Anforderungen](#)

[Verwendete Komponenten](#)

[Konfigurieren](#)

[Netzwerkdiagramm](#)

[WPA2-PSK-Konfiguration mit CLI](#)

[WPA2-PSK-Konfiguration mit GUI](#)

[Authentifizierungskonfiguration über CLI öffnen](#)

[Authentifizierungskonfiguration über GUI öffnen](#)

[Überprüfen](#)

[Fehlerbehebung](#)

## Einführung

In diesem Dokument werden die Vorteile der Verwendung von Wi-Fi Protected Access 2 (WPA2) in einem WLAN erläutert. Das Dokument enthält zwei Konfigurationsbeispiele für die Implementierung von WPA2 in einem WLAN:

- Konfiguration eines WPA2 Pre-Shared Key (PSK)
- Konfiguration der offenen Authentifizierung

## Voraussetzungen

### Anforderungen

Cisco empfiehlt, über Kenntnisse in folgenden Bereichen zu verfügen:

- Wireless Protected Access (WPA)
- WLAN-Sicherheitslösungen

### Verwendete Komponenten

Die Informationen in diesem Dokument basieren auf den folgenden Software- und Hardwareversionen:

- Cisco Wireless LAN Controller (WLC) der Serie 5700 mit Cisco IOS<sup>®</sup> XE Software, Version 3.3
- Cisco Aironet Lightweight Access Point der Serie 3600
- Microsoft Windows 7 - natives Wireless-SupPLICANT

Die Informationen in diesem Dokument wurden von den Geräten in einer bestimmten Laborumgebung erstellt. Alle in diesem Dokument verwendeten Geräte haben mit einer leeren (Standard-)Konfiguration begonnen. Wenn Ihr Netzwerk in Betrieb ist, stellen Sie sicher, dass Sie die potenziellen Auswirkungen eines Befehls verstehen.

## Konfigurieren

**Hinweis:** Verwenden Sie das [Command Lookup Tool](#) (nur [registrierte](#) Kunden), um weitere Informationen zu den in diesem Abschnitt verwendeten Befehlen zu erhalten.

## Netzwerkdiagramm

In dieser Abbildung wird das Netzwerkdiagramm angezeigt:

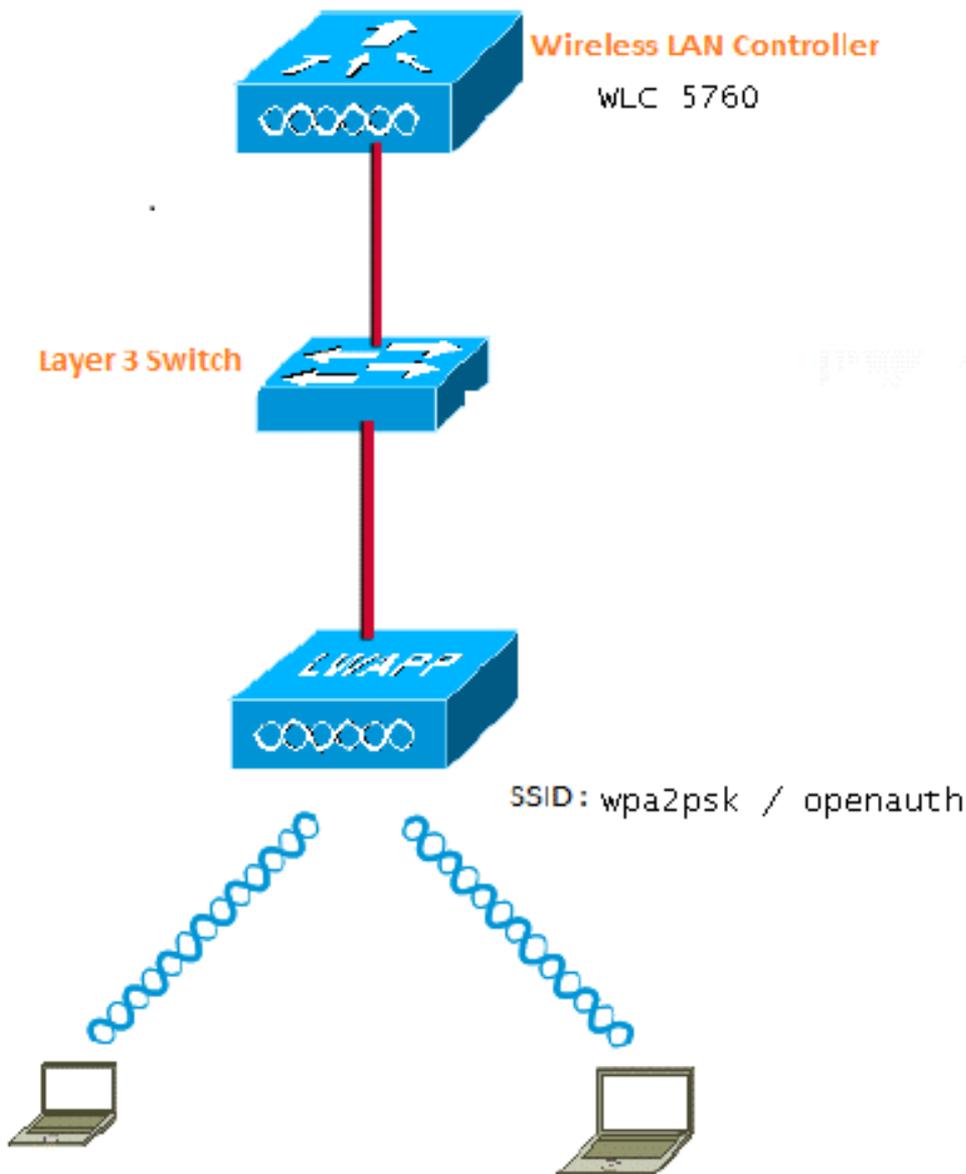


Abbildung 1: Netzwerkdiagramm

## WPA2-PSK-Konfiguration mit CLI

In diesem Beispiel wird das Verfahren beschrieben, mit dem die Befehlszeilenschnittstelle (CLI) zum Konfigurieren von DHCP-Snooping für die für Clients verwendeten VLANs verwendet wird.

VLAN20 wird für Clients verwendet, und der Pool wird auf demselben WLC konfiguriert. Das TenGigabitEthernet1/0/1 des Cisco 5700 WLC ist mit dem Uplink-Switch verbunden. Wenn der DHCP-Server auf dem Server außerhalb des WLC oder auf einem externen DHCP-Server konfiguriert ist, müssen Sie DHCP-Snooping- und Relay-Informationen vertrauen.

```
ip device tracking
ip dhcp snooping vlan 12,20,30,40
ip dhcp snooping
!
ip dhcp pool vlan20
```

```
network 20.20.20.0 255.255.255.0
default-router 20.20.20.1
```

```
interface Vlan20
 ip address 20.20.20.1 255.255.255.0
```

```
interface TenGigabitEthernet1/0/1
 switchport trunk native vlan 12
 switchport mode trunk
 ip dhcp relay information trusted
 ip dhcp snooping trust
```

```
wlan wpa2psk 1 wpa2psk
 client vlan 20
 no security wpa akm dot1x
 security wpa akm psk set-key ascii 0 Cisco123
 no shutdown
```

**Hinweis:** Wenn Ihre Konfiguration ein Leerzeichen im PSK-Kennwort enthält, verwenden Sie das Format "password PSK". Das gleiche Format sollte auch bei der Konfiguration mit der GUI verwendet werden.


## Beispiel

```
security wpa akm psk set-key ascii 0 "Cisco 123"
```

## WPA2-PSK-Konfiguration mit GUI

Gehen Sie wie folgt vor, um ein WPA2-PSK in der WLC-GUI zu konfigurieren:

1. Navigieren Sie zu **Konfiguration > Wireless > WLAN > WLANs**, und erstellen Sie ein neues WLAN:

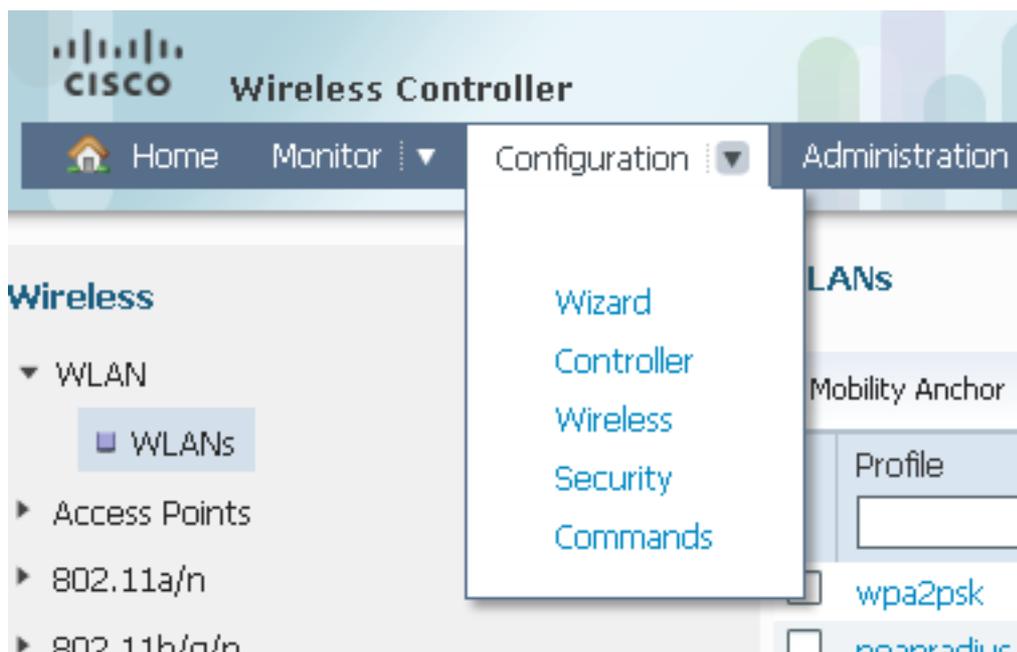

2. Aktivieren Sie WPA2, und ordnen Sie ihn der gewünschten Schnittstelle zu:

**WLAN**  
WLAN > Edit

General Security QOS Advanced

Profile Name	wpa2psk
Type	WLAN
SSID	wpa2psk
Status	<input checked="" type="checkbox"/>
Security Policies	[WPA2][Auth(PSK)] (Modifications done under security tab will appear after applying the changes.)
Radio Policy	All ▾
Interface/Interface Group(G)	default ▾
Broadcast SSID	<input checked="" type="checkbox"/>
Multicast VLAN Feature	<input type="checkbox"/>

3. Klicken Sie auf die Registerkarte **Security**, aktivieren Sie das Kontrollkästchen **WPA2 Policy**, und wählen Sie **AES** als **WPA2 Encryption aus**. Wählen Sie in der Dropdown-Liste **Auth Key Mgmt (Auth-Schlüsselverwaltung)** die Option **PSK**. Geben Sie den PSK ein, den der Client für die Verbindung verwenden soll:

## WLAN

WLAN > Edit

General Security QOS Advanced

Layer2 Layer3 AAA Server

Layer 2 Security WPA + WPA2

MAC Filtering

### WPA+WPA2 Parameters

WPA Policy

WPA2 Policy

WPA2 Encryption  AES  TKIP

Auth Key Mgmt PSK

PSK Format ASCII

••••••••

## Authentifizierungskonfiguration über CLI öffnen

Dies ist ein Beispiel für die Verwendung der CLI, um DHCP-Snooping für die VLANs zu konfigurieren, die für Clients verwendet werden. In diesem Beispiel wird VLAN20 für Clients verwendet. Der Pool wird auf demselben WLC konfiguriert.

TenGigabitEthernet1/0/1 des 5760 WLC ist mit dem Uplink-Switch verbunden. Wenn der DHCP-Server auf dem Server außerhalb des WLC oder auf einem externen DHCP-Server konfiguriert ist, müssen Sie den DHCP-Snooping- und Relay-Informationen vertrauen.

```
ip device tracking
ip dhcp snooping vlan 12,20,30,40
ip dhcp snooping
!
ip dhcp pool vlan20
 network 20.20.20.0 255.255.255.0
 default-router 20.20.20.1

interface Vlan20
 ip address 20.20.20.1 255.255.255.0

interface TenGigabitEthernet1/0/1
```


```
switchport trunk native vlan 12
switchport mode trunk
ip dhcp relay information trusted
ip dhcp snooping trust
```

```
wlan open 5 open
client vlan VLAN0020
no security wpa
no security wpa akm dot1x
no security wpa wpa2
no security wpa wpa2 ciphers aes
session-timeout 1800
no shutdown
```

## Authentifizierungskonfiguration über GUI öffnen

In diesem Verfahren wird beschrieben, wie die offene Authentifizierung in der WLC-GUI konfiguriert wird:

1. Navigieren Sie zu **Konfiguration > Wireless > WLAN > WLANs**, und erstellen Sie ein neues WLAN:

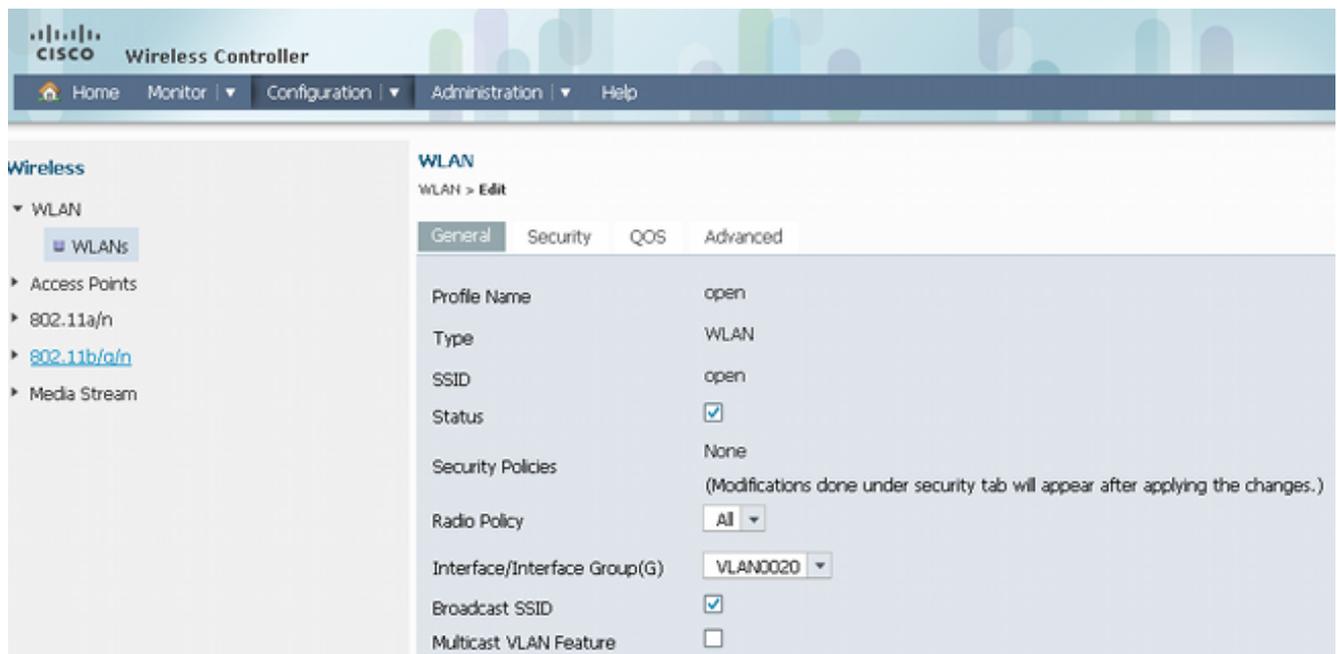

2. Klicken Sie auf die Registerkarte **Sicherheit**. Stellen Sie unter der Registerkarte **Layer 2** und der Registerkarte **Layer 3** alles auf "none" ein. Dies ist ein Beispiel für die Konfigurationsergebnisse:

<input type="checkbox"/>	open	5	open	20	Enabled
--------------------------	------	---	------	----	---------

## Überprüfen

In diesem Abschnitt überprüfen Sie, ob Ihre Konfiguration ordnungsgemäß funktioniert.

Bestätigen Sie, dass der WPA2-PSK-Client verbunden ist:

**Intel® PROSet/Wireless WiFi Connection Utility**

File Tools Advanced Profiles Help



 **You are connected to wpa2psk.**

Network Name: wpa2psk [Details...](#)  
 Speed: 78.0 Mbps  
 Signal Quality: Excellent  
 IP Address: 20.20.20.3

WiFi Networks (59)

	<b>wpa2psk</b> Connected						
	This network has security enabled						
	<b>EAPFAST</b>						
	This network has security enabled						
	<b>DVA</b> Manual						
	This network has security enabled						
	<b>peapradius</b> Manual						
	This network has security enabled						

[Disconnect](#) [Properties...](#) [Refresh](#)

To manage profiles of previously connected WiFi networks, click the Profiles button. [Profiles...](#)

[WiFi On](#) Hardware radio switch: ON [Help?](#) [Close](#)

Bestätigen Sie, dass der Client mit einer offenen Authentifizierung verbunden ist:

**Intel® PROSet/Wireless WiFi Connection Utility**

File Tools Advanced Profiles Help

**You are connected to open.**

Network Name: open  
 Speed: 78.0 Mbps  
 Signal Quality: Excellent  
 IP Address: 20.20.20.3

**WiFi Networks (56)**

Network Name	Status	Security	Capabilities
open	Connected	None	a, g, n
EAPFAST	Manual	Enabled	a, g, n
wpa2psk	Manual	Enabled	a, g, n
DVA	Manual	Enabled	a, g, n

Buttons: Disconnect, Properties..., Refresh, Profiles..., WiFi On, Hardware radio switch: ON, Help?, Close

## Fehlerbehebung

Dieser Abschnitt enthält Informationen zur Fehlerbehebung in Ihrer Konfiguration.

### Hinweise:

Das [Output Interpreter Tool](#) (nur [registrierte](#) Kunden) unterstützt bestimmte **show**-Befehle. Verwenden Sie das Output Interpreter Tool, um eine Analyse der **Ausgabe des Befehls show** anzuzeigen.

Weitere Informationen [zu Debug-Befehlen](#) vor der Verwendung von **Debug-Befehlen** finden Sie unter [Wichtige Informationen](#).

Dies ist ein Beispiel für die Ausgabe von nützlichen **Debug-** und **Ablaufverfolgungsbefehlen**:

```
debug client mac XXXX.XXXX.XXXX
```

```
Controller#sh debugging
```

```
Nova Platform:
```

```
dot11/state debugging is on
pem/events debugging is on
client/mac-addr debugging is on
dot11/detail debugging is on
mac/ filters[string 0021.5c8c.c761] debugging is on
dot11/error debugging is on
dot11/mobile debugging is on
pem/state debugging is on
```

```
set trace group-wireless-client filter mac XXXX.XXXX.XXXX
set trace wcm-dot1x event filter mac XXXX.XXXX.XXXX
set trace wcm-dot1x aaa filter mac XXXX.XXXX.XXXX
set trace aaa wireless events filter mac XXXX.XXXX.XXXX
set trace access-session core sm filter mac XXXX.XXXX.XXXX
set trace access-session method dot1x filter XXXX.XXXX.XXXX
```

```
*Sep 1 05:55:01.321: 0021.5C8C.C761 Association received from mobile on AP
C8F9.F983.4260 1 wcm: i.D^Iw for client
*Sep 1 05:55:01.321: 0021.5C8C.C761 qos upstream policy is unknown and
downstream policy is unknown 1 wcm: r client
*Sep 1 05:55:01.321: 0021.5C8C.C761 apChanged 0 wlanChanged 1 mscb ipAddr
20.20.20.3, apf RadiusOverride 0x0, numIPv6Addr=0 1 wcm: •nJ^Iwy_status 0
attr len^G$8\227v^K
*Sep 1 05:55:01.321: 0021.5C8C.C761 Applying WLAN policy on MSCB. 1 wcm:
ipAddr 20.20.20.3, apf RadiusOverride 0x0, numIPv6Addr=0
*Sep 1 05:55:01.321: 0021.5C8C.C761 Scheduling deletion of Mobile Station: 1
wcm: (callerId: 50) in 1 seconds
*Sep 1 05:55:01.321: 0021.5C8C.C761 Disconnecting client due to switch of
WLANS from 6(wep) to 5(open) 1 wcm:
*Sep 1 05:55:02.193: 0021.5C8C.C761 apfMsExpireCallback (apf_ms.c: 1 wcm: 664)
Expiring Mobile!
*Sep 1 05:55:02.193: 0021.5C8C.C761 apfMsExpireMobileStation (apf_ms.c: 1 wcm:
6953) Changing state for mobile 0021.5C8C.C761 on AP C8F9.F983.4260 from
Associated to Disassociated
*Sep 1 05:55:02.193: 0021.5C8C.C761 Sent Deauthenticate to mobile on BSSID
C8F9.F983.4260 slot 1(caller apf_ms.c: 1 wcm: 7036)
*Sep 1 05:55:02.193: 0021.5C8C.C761 apfMsExpireMobileStation (apf_ms.c: 1 wcm:
7092) Changing state for mobile 0021.5C8C.C761 on AP C8F9.F983.4260 from
Disassociated to Idle
*Sep 1 05:55:02.193: 0021.5C8C.C761 20.20.20.3 RUN (20) Deleted mobile LWAPP
rule on AP [ C8F9.F983.4260 ] 1 wcm: 5C8C.C761 on AP C8F9.F983.4260 from
Disassociated to Idle
*Sep 1 05:55:02.193: 0021.5C8C.C761 20.20.20.3 RUN (20) FastSSID for the
client [ C8F9.F983.4260 ] NOTENABLED 1 wcm: C.C761 on AP C8F9.F983.4260
from Disassociated to Idle
*Sep 1 05:55:02.193: 0021.5C8C.C761 Incrementing the Reassociation Count 1 for
client (of interface VLAN0020) 1 wcm: D
*Sep 1 05:55:02.193: 0021.5C8C.C761 Clearing Address 20.20.20.3 on mobile 1
wcm: for client (of interface VLAN0020)
*Sep 1 05:55:02.193: PEM rcv processing msg Del SCB(4) 1 wcm: 0.20.3 on
mobile
```

\*Sep 1 05:55:02.193: 0021.5C8C.C761 20.20.20.3 RUN (20) Skipping TMP rule  
add 1 wcm: lient (of interface VLAN0020)  
\*Sep 1 05:55:02.193: 0021.5C8C.C761 20.20.20.3 RUN (20) Change state to  
DHCP\_REQD (7) last state RUN (20) 1 wcm:  
\*Sep 1 05:55:02.193: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: Client 1 m\_vlan 20  
Radio iif id 0xbfcfdc00000003a bssid iif id 0x8959800000004a, bssid  
C8F9.F983.4260  
\*Sep 1 05:55:02.193: 0021.5C8C.C761 WCDB\_AUTH: 1 wcm: Adding opt82 len 0  
\*Sep 1 05:55:02.193: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: Suppressing SPI  
(client pending deletion) pemstate 7 state LEARN\_IP(2) vlan 20 client\_id  
0xac70800000004b mob=Local(1) ackflag 2 dropd 0, delete 1  
\*Sep 1 05:55:02.193: 0021.5C8C.C761 Sending SPI spi\_epm\_epm\_terminate\_session  
successfull 1 wcm: pemstate 7 state LEARN\_IP(2) vlan 20 client\_id  
0xac70800000004b mob=Local(1) ackflag 2 dropd 0, delete 1  
\*Sep 1 05:55:02.194: 0021.5C8C.C761 Sending SPI spi\_epm\_epm\_terminate\_session  
successfull 1 wcm: pemstate 7 state LEARN\_IP(2) vlan 20 client\_id  
0xac70800000004b mob=Local(1) ackflag 2 dropd 0, delete 1  
\*Sep 1 05:55:02.194: 0021.5C8C.C761 Deleting wireless client; Reason code 0,  
Preset 1, AAA cause 1 1 wcm: 7 state LEARN\_IP(2) vlan 20 client\_id  
0xac70800000004b mob=Local(1) ackflag 2 dropd 0, delete 1  
\*Sep 1 05:55:02.194: 0021.5C8C.C761 WCDB\_DEL: 1 wcm: Successfully sent  
\*Sep 1 05:55:02.194: 0021.5C8C.C761 Expiring mobile state delete 1 wcm: on  
code 0, Preset 1, AAA cause 1  
\*Sep 1 05:55:02.194: 0021.5C8C.C761 0.0.0.0 DHCP\_REQD (7) Handling pemDelScb  
Event skipping delete 1 wcm: state LEARN\_IP(2) vlan 20 client\_id  
0xac70800000004b mob=Local(1) ackflag 2 dropd 0, delete 1  
\*Sep 1 05:55:02.197: 0021.5C8C.C761 WCDB SPI response msg handler client code  
1 mob state 1 1 wcm: g delete  
\*Sep 1 05:55:02.197: 0021.5C8C.C761 apfProcessWcdbClientDelete: 1 wcm: Delete  
ACK from WCDB.  
\*Sep 1 05:55:02.197: 0021.5C8C.C761 WCDB\_DELACK: 1 wcm: wcdbAckRecvdFlag  
updated  
\*Sep 1 05:55:02.197: 0021.5C8C.C761 WCDB\_DELACK: 1 wcm: Client IIF Id dealloc  
SUCCESS w/ 0xac70800000004b.  
\*Sep 1 05:55:02.197: 0021.5C8C.C761 Invoked platform delete and cleared handle  
1 wcm: w/ 0xac70800000004b.  
\*Sep 1 05:55:02.197: 0021.5C8C.C761 Deleting mobile on AP C8F9.F983.4260 (1)  
1 wcm: w/ 0xac70800000004b.  
\*Sep 1 05:55:02.197: 0021.5C8C.C761 Unlinked and freed mscb 1 wcm:  
8F9.F983.4260 (1)  
\*Sep 1 05:55:02.197: WCDB\_IIF: 1 wcm: Ack Message ID: 0xac70800000004b code  
1003  
\*Sep 1 05:55:02.379: 0021.5C8C.C761 Adding mobile on LWAPP AP C8F9.F983.4260  
(1) 1 wcm: xac7080000.D^Iwb.  
\*Sep 1 05:55:02.379: 0021.5C8C.C761 Creating WL station entry for client -  
rc 0 1 wcm:  
\*Sep 1 05:55:02.379: 0021.5C8C.C761 Association received from mobile on AP  
C8F9.F983.4260 1 wcm: 0.D^Iwb.  
\*Sep 1 05:55:02.379: 0021.5C8C.C761 qos upstream policy is unknown and  
downstream policy is unknown 1 wcm:  
\*Sep 1 05:55:02.379: 0021.5C8C.C761 apChanged 0 wlanChanged 0 mscb ipAddr  
0.0.0.0, apf RadiusOverride 0x0, numIPv6Addr=0 1 wcm: \2105H.nJ^Iwlient\_id  
0xac708000^G\$8\227v^K  
\*Sep 1 05:55:02.379: 0021.5C8C.C761 Applying WLAN policy on MSCB. 1 wcm:  
ipAddr 0.0.0.0, apf RadiusOverride 0x0, numIPv6Addr=0  
\*Sep 1 05:55:02.379: 0021.5C8C.C761 Applying WLAN ACL policies to client 1  
wcm: 0.0.0.0, apf RadiusOverride 0x0, numIPv6Addr=0  
\*Sep 1 05:55:02.379: 0021.5C8C.C761 No Interface ACL used for Wireless client  
in WCM(NGWC) 1 wcm: usOverride 0x0, numIPv6Addr=0  
\*Sep 1 05:55:02.379: 0021.5C8C.C761 Applying site-specific IPv6 override for  
station 0021.5C8C.C761 - vapId 5, site 'default-group', interface  
'VLAN0020' 1 wcm:  
\*Sep 1 05:55:02.379: 0021.5C8C.C761 Applying local bridging Interface Policy  
for station 0021.5C8C.C761 - vlan 20, interface 'VLAN0020' 1 wcm: erface

'VLAN0020'

\*Sep 1 05:55:02.379: 0021.5C8C.C761 STA - rates (8): 1 wcm:

140 18 152 36 176 72 96 108 0 0 0 0 0 0 0

\*Sep 1 05:55:02.379: 0021.5C8C.C761 new capwap\_wtp\_iif\_id b6818000000038,

sm capwap\_wtp\_iif\_id 0 1 wcm: 8C.C761 - vlan 20, interface 'VLAN0020'

\*Sep 1 05:55:02.379: 0021.5C8C.C761 WCDB\_ADD: 1 wcm: Radio IIFID

0xbfc0c00000003a, BSSID IIF Id 0xbb30c0000000046, COS 4

\*Sep 1 05:55:02.379: Load Balancer: 1 wcm: Success, Resource allocated are:

Active Switch number: 1, Active Asic number : 0, Reserve Switch number 0

Reserve Asic number 0. AP Asic num 0

\*Sep 1 05:55:02.379: 0021.5C8C.C761 WCDB\_ADD: 1 wcm: Anchor Sw 1, Doppler 0

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_ALLOCATE: 1 wcm: Client IIF Id alloc

SUCCESS w/ client 8e7bc000000004d (state 0).

\*Sep 1 05:55:02.380: 0021.5C8C.C761 iifid Clearing Ack flag 1 wcm: F Id alloc

SUCCESS w/ client 8e7bc000000004d (state 0).

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_ADD: 1 wcm: Adding opt82 len 0

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_ADD: 1 wcm: Cleaering Ack flag

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_ADD: 1 wcm: ssid open bssid

C8F9.F983.4260 vlan 20 auth=ASSOCIATION(0) wlan(ap-group/global) 5/5

client 0 assoc 1 mob=Unassoc(0) radio 1 m\_vlan 20 ip 0.0.0.0 src

0xb68180000000038 dst 0x0 cid 0x8e7bc000000004d glob rsc id 14dhcpsrv

0.0.0.0 ty

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_ADD: 1 wcm: msch iifid

0x8e7bc000000004d msinfo iifid 0x0

\*Sep 1 05:55:02.380: 0021.5C8C.C761 0.0.0.0 START (0) Initializing policy 1

wcm: info iifid 0x0

\*Sep 1 05:55:02.380: 0021.5C8C.C761 0.0.0.0 START (0) Change state to

AUTHCHECK (2) last state AUTHCHECK (2) 1 wcm: -group/global) 5/5 client 0

assoc 1 mob=Unassoc(0) radio 1 m\_vlan 20 ip 0.0.0.0 src 0xb68180000000038

dst 0x0 cid 0x8e7bc000000004d glob rsc id 14dhcpsrv 0.0.0.0 ty

\*Sep 1 05:55:02.380: 0021.5C8C.C761 0.0.0.0 AUTHCHECK (2) Change state to

L2AUTHCOMPLETE (4) last state L2AUTHCOMPLETE (4) 1 wcm: 5/5 client 0 assoc

1 mob=Unassoc(0) radio 1 m\_vlan 20 ip 0.0.0.0 src 0xb68180000000038 dst 0x0

cid 0x8e7bc000000004d glob rsc id 14dhcpsrv 0.0.0.0 ty

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: Client 1 m\_vlan 20

Radio iif id 0xbfc0c000000003a bssid iif id 0xbb30c0000000046, bssid

C8F9.F983.4260

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_AUTH: 1 wcm: Adding opt82 len 0

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_LLM: 1 wcm: NoRun Prev Mob 0, Curr

Mob 0 llmReq 1, return False

\*Sep 1 05:55:02.380: 0021.5C8C.C761 auth state 1 mob state 0 setWme 0 wme 1

roam\_sent 0 1 wcm: rn False

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: auth=L2\_AUTH(1) vlan

20 radio 1 client\_id 0x8e7bc000000004d mobility=Unassoc(0) src\_int

0xb68180000000038 dst\_int 0x0 ackflag 0 reassoc\_client 0 llm\_notif 0 ip

0.0.0.0 ip\_learn\_type UNKNOWN

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: In L2 auth but l2ack

waiting lfag not set,so set

\*Sep 1 05:55:02.380: 0021.5C8C.C761 0.0.0.0 L2AUTHCOMPLETE (4) DHCP Not

required on AP C8F9.F983.4260 vapId 5 apVapId 5for this client 1 wcm:

68180000000038 dst\_int 0x0 ackflag 0 reassoc\_client 0 llm\_notif 0 i\$=6v.0.0.0

it^\_Dv^7HnP6v^D6H15Ht^\_Dv\$6H8^ r^D6H>&5v8^ r^D6H>&5v^D6Ht^M^Lw^7H8^ r

\*Sep 1 05:55:02.380: WCDB\_IIF: 1 wcm: Ack Message ID: 0x8e7bc000000004d code

1001

\*Sep 1 05:55:02.380: 0021.5C8C.C761 Not Using WMM Compliance code qosCap 00 1

wcm: quired on AP C8F9.F983.4260 vapId 5 apVapId 5for this client

\*Sep 1 05:55:02.380: 0021.5C8C.C761 0.0.0.0 L2AUTHCOMPLETE (4) Plumbed

mobile LWAPP rule on AP C8F9.F983.4260 vapId 5 apVapId 5 1 wcm: client

\*Sep 1 05:55:02.380: 0021.5C8C.C761 0.0.0.0 L2AUTHCOMPLETE (4) Change state

to DHCP\_REQD (7) last state DHCP\_REQD (7) 1 wcm: apVapId 5

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: Client 1 m\_vlan 20

Radio iif id 0xbfc0c000000003a bssid iif id 0xbb30c0000000046, bssid

C8F9.F983.4260

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_AUTH: 1 wcm: Adding opt82 len 0

\*Sep 1 05:55:02.380: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: Suppressing SPI (Mobility state not known) pemstate 7 state LEARN\_IP(2) vlan 20 client\_id 0x8e7bc00000004d mob=Unassoc(0) ackflag 1 dropd 0

\*Sep 1 05:55:02.380: 0021.5C8C.C761 Incrementing the Reassociation Count 1 for client (of interface VLAN0020) 1 wcm: EARN\_IP(2) vlan 20 client\_id 0x8e7bc00000004d mob=Unassoc(0) ackflag 1 dropd 0

\*Sep 1 05:55:02.380: 0021.5C8C.C761 apfPemAddUser2 (apf\_policy.c: 1 wcm: 161) Changing state for mobile 0021.5C8C.C761 on AP C8F9.F983.4260 from Idle to Associated

\*Sep 1 05:55:02.380: 0021.5C8C.C761 Scheduling deletion of Mobile Station: 1 wcm: (callerId: 49) in 1800 seconds

\*Sep 1 05:55:02.380: 0021.5C8C.C761 Ms Timeout = 1800, Session Timeout = 1800 1 wcm: llerId: 49) in 1800 seconds

\*Sep 1 05:55:02.381: 0021.5C8C.C761 Sending Assoc Response to station on BSSID C8F9.F983.4260 (status 0) ApVapId 5 Slot 1 1 wcm: .F983.4260 from Idle to Associated

\*Sep 1 05:55:02.381: 0021.5C8C.C761 apfProcessAssocReq (apf\_80211.c: 1 wcm: 5260) Changing state for mobile 0021.5C8C.C761 on AP C8F9.F983.4260 from Associated to Associated

\*Sep 1 05:55:02.381: 0021.5C8C.C761 0.0.0.0 DHCP\_REQD (7) pemAdvanceState2: 1 wcm: MOBILITY-INCOMPLETE with state 7.

\*Sep 1 05:55:02.381: 0021.5C8C.C761 0.0.0.0 DHCP\_REQD (7) pemAdvanceState2: 1 wcm: MOBILITY-INCOMPLETE with state 7.

\*Sep 1 05:55:02.381: 0021.5C8C.C761 0.0.0.0 DHCP\_REQD (7) pemAdvanceState2: 1 wcm: MOBILITY-COMPLETE with state 7.

\*Sep 1 05:55:02.381: 0021.5C8C.C761 0.0.0.0 DHCP\_REQD (7) State Update from Mobility-Incomplete to Mobility-Complete, mobility role=Local, client state=APF\_MS\_STATE\_ASSOCIATED 1 wcm: 1 dropd 0

\*Sep 1 05:55:02.381: 0021.5C8C.C761 0.0.0.0 DHCP\_REQD (7) pemAdvanceState2 3611, Adding TMP rule 1 wcm: o Mobility-Complete, mobility role=Local, client state=APF\_MS\_STATE\_ASSOCIATED

\*Sep 1 05:55:02.381: 0021.5C8C.C761 0.0.0.0 DHCP\_REQD (7) Adding Fast Path rule on AP C8F9.F983.4260 , slot 1 802.1P = 0 1 wcm: role=Local, client state=APF\_MS\_STATE\_ASSOCIATED

\*Sep 1 05:55:02.381: 0021.5C8C.C761 0.0.0.0 DHCP\_REQD (7) Successfully plumbed mobile rule 1 wcm: F9.F983.4260 , slot 1 802.1P = 0^M

\*Sep 1 05:55:02.381: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: Client 1 m\_vlan 20 Radio iif id 0xbfcd000000003a bssid iif id 0xbb30c000000046, bssid C8F9.F983.4260

\*Sep 1 05:55:02.381: 0021.5C8C.C761 WCDB\_AUTH: 1 wcm: Adding opt82 len 0

\*Sep 1 05:55:02.381: 0021.5C8C.C761 WCDB\_LLM: 1 wcm: NoRun Prev Mob 0, Curr Mob 1 llmReq 1, return False

\*Sep 1 05:55:02.381: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: Suppressing SPI (ACK message not recvd) pemstate 7 state LEARN\_IP(2) vlan 20 client\_id 0x8e7bc00000004d mob=Local(1) ackflag 1 dropd 1

\*Sep 1 05:55:02.381: 0021.5C8C.C761 Error updating wcdb on mobility complete 1 wcm: not recvd) pemstate 7 state LEARN\_IP(2) vlan 20 client\_id 0x8e7bc00000004d mob=Local(1) ackflag 1 dropd 1

\*Sep 1 05:55:02.381: PEM recv processing msg Epm spi response(12) 1 wcm: complete

\*Sep 1 05:55:02.381: 0021.5C8C.C761 aaa attribute list length is 79 1 wcm: complete

\*Sep 1 05:55:02.381: 0021.5C8C.C761 Sending SPI spi\_epm\_epm\_session\_create successfull 1 wcm: ) pemstate 7 state LEARN\_IP(2) vlan 20 client\_id 0x8e7bc00000004d mob=Local(1) ackflag 1 dropd 1

\*Sep 1 05:55:02.381: PEM recv processing msg Add SCB(3) 1 wcm: pm\_session\_create successfull

\*Sep 1 05:55:02.381: 0021.5C8C.C761 0.0.0.0, auth\_state 7 mmRole Local !!! 1 wcm: successfull

\*Sep 1 05:55:02.381: 0021.5C8C.C761 0.0.0.0, auth\_state 7 mmRole Local, updating wcdb not needed 1 wcm: 7 state LEARN\_IP(2) vlan 20 client\_id 0x8e7bc00000004d mob=Local(1) ackflag 1 dropd 1

\*Sep 1 05:55:02.381: 0021.5C8C.C761 Tclas Plumb needed: 1 wcm: 0

\*Sep 1 05:55:02.384: EPM: 1 wcm: Session create resp - client handle

8e7bc00000004d session b8000020  
\*Sep 1 05:55:02.384: EPM: 1 wcm: Netflow session create resp - client handle  
8e7bc00000004d sess b8000020  
\*Sep 1 05:55:02.384: PEM rcv processing msg Epm spi response(12) 1 wcm:  
le 8e7bc00000004d sess b8000020  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 Received session\_create\_response for  
client handle 40105511256850509 1 wcm: LEARN\_IP(2) vlan 20 client\_id  
0x8e7bc00000004d mob=Local(1) ackflag 1 dropd 1  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 Received session\_create\_response with EPM  
session handle 3087007776 1 wcm:  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 Send request to EPM 1 wcm: ate\_response  
with EPM session handle 3087007776  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 aaa attribute list length is 5 1 wcm: e  
with EPM session handle 3087007776  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 Sending Activate request for session  
handle 3087007776 successful 1 wcm: 6  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 Post-auth policy request sent! Now wait  
for post-auth policy ACK from EPM 1 wcm: N\_IP(2) vlan 20 client\_id  
0x8e7bc00000004d mob=Local(1) ackflag 1 dropd 1  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 WCDB SPI response msg handler client code  
0 mob state 0 1 wcm: licy ACK from EPM  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 WcdbClientUpdate: 1 wcm: L2 Auth ACK from  
WCDB  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 WCDB\_L2ACK: 1 wcm: wcdbAckRecvdFlag  
updated  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: Client 1 m\_vlan 20  
Radio iif id 0xbfcfdc00000003a bssid iif id 0xbb30c000000046, bssid  
C8F9.F983.4260  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 WCDB\_AUTH: 1 wcm: Adding opt82 len 0  
\*Sep 1 05:55:02.384: 0021.5C8C.C761 WCDB\_LLM: 1 wcm: NoRun Prev Mob 0, Curr  
Mob 1 llmReq 1, return False  
\*Sep 1 05:55:02.385: 0021.5C8C.C761 auth state 2 mob state 1 setWme 0 wme 1  
roam\_sent 0 1 wcm: rn False  
\*Sep 1 05:55:02.385: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: auth=LEARN\_IP(2) vlan  
20 radio 1 client\_id 0x8e7bc00000004d mobility=Local(1) src\_int  
0xb6818000000038 dst\_int 0x0 ackflag 2 reassoc\_client 0 llm\_notif 0 ip  
0.0.0.0 ip\_learn\_type UNKNOWN  
\*Sep 1 05:55:02.385: EPM: 1 wcm: Init feature, client handle 8e7bc00000004d  
session b8000020 authz ec00000e  
\*Sep 1 05:55:02.385: EPM: 1 wcm: Activate feature client handle  
8e7bc00000004d sess b8000020 authz ec00000e  
\*Sep 1 05:55:02.385: PEM rcv processing msg Epm spi response(12) 1 wcm: 004d  
sess b8000020 authz ec00000e  
\*Sep 1 05:55:02.385: 0021.5C8C.C761 Received activate\_features\_resp for client  
handle 40105511256850509 1 wcm: 004d mobility=Local(1) src\_int  
0xb6818000000038 dst\_int 0x0 ackflag 2 reassoc\_client 0 llm\_notif 0  
ip\$=6v0.0.0 ipt^Dv^\7HnP6v^D6Hl5Ht^\_Dv\$6H8^ r^D6H>&5v8^  
r^D6H>&5v^D6Ht^M^Lw^\7H8^ r  
\*Sep 1 05:55:02.385: 0021.5C8C.C761 Received activate\_features\_resp for EPM  
session handle 3087007776 1 wcm: 9  
\*Sep 1 05:55:02.385: EPM: 1 wcm: Policy enforcement - client handle  
8e7bc00000004d session 2800000e authz ec00000e  
\*Sep 1 05:55:02.385: EPM: 1 wcm: Netflow policy enforcement - client handle  
8e7bc00000004d sess 2800000e authz ec00000e msg\_type 0 policy\_status 0 attr  
len 0  
\*Sep 1 05:55:02.385: PEM rcv processing msg Epm spi response(12) 1 wcm: e  
8e7bc00000004d sess 2800000e authz ec00000e msg\_type 0 policy\_status 0 attr  
len 0  
\*Sep 1 05:55:02.385: 0021.5C8C.C761 Received policy\_enforcement\_response for  
client handle 40105511256850509 1 wcm: 00e msg\_type 0 policy\_status 0 attr  
len 0  
\*Sep 1 05:55:02.385: 0021.5C8C.C761 Received policy\_enforcement\_response for  
EPM session handle 671088654 1 wcm: 09  
\*Sep 1 05:55:02.385: 0021.5C8C.C761 Received response for

\_EPM\_SPI\_ACTIVATE\_FEATURES request sent for client 1 wcm: 00e msg\_type 0  
policy\_status 0 attr len 0  
\*Sep 1 05:55:02.385: 0021.5C8C.C761 Received \_EPM\_SPI\_STATUS\_SUCCESS for  
request sent for client 1 wcm: for client  
\*Sep 1 05:55:02.385: 0021.5C8C.C761 Post-auth policy ACK recvd from EPM, unset  
flag on MSCB 1 wcm: ient  
\*Sep 1 05:55:02.400: 0021.5C8C.C761 WCDB\_IP\_BIND: 1 wcm: w/ IPv4 20.20.20.3  
ip\_learn\_type DHCP add\_delete 1,options\_length 0  
\*Sep 1 05:55:02.400: 0021.5C8C.C761 WcdbClientUpdate: 1 wcm: IP Binding from  
WCDB ip\_learn\_type 1, add\_or\_delete 1  
\*Sep 1 05:55:02.400: 0021.5C8C.C761 IPv4 Addr: 1 wcm: 20:20:20:3  
\*Sep 1 05:55:02.400: 0021.5C8C.C761 MS got the IP, resetting the Reassociation  
Count 0 for client 1 wcm: \_delete 1  
\*Sep 1 05:55:02.400: 0021.5C8C.C761 20.20.20.3 DHCP\_REQD (7) Change state to  
RUN (20) last state RUN (20) 1 wcm: length 0  
\*Sep 1 05:55:02.400: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: Client 1 m\_vlan 20  
Radio iif id 0xbfcfdc00000003a bssid iif id 0xbb30c000000046, bssid  
C8F9.F983.4260  
\*Sep 1 05:55:02.400: 0021.5C8C.C761 WCDB\_AUTH: 1 wcm: Adding opt82 len 0  
\*Sep 1 05:55:02.401: 0021.5C8C.C761 WCDB\_LLM: 1 wcm: prev Mob state 1 curr  
Mob State 1 llReq flag 0  
\*Sep 1 05:55:02.401: 0021.5C8C.C761 auth state 4 mob state 1 setWme 0 wme 1  
roam\_sent 0 1 wcm: g 0  
\*Sep 1 05:55:02.401: 0021.5C8C.C761 WCDB\_CHANGE: 1 wcm: auth=RUN(4) vlan 20  
radio 1 client\_id 0x8e7bc00000004d mobility=Local(1) src\_int  
0xb6818000000038 dst\_int 0x0 ackflag 2 reassoc\_client 0 llm\_notif 0 ip  
20.20.20.3 ip\_learn\_type DHCP  
\*Sep 1 05:55:02.401: 0021.5C8C.C761 20.20.20.3 RUN (20) Reached  
PLUMBFASPATH: 1 wcm: from line 4430  
\*Sep 1 05:55:02.401: 0021.5C8C.C761 20.20.20.3 RUN (20) Replacing Fast Path  
rule on AP C8F9.F983.4260 , slot 1 802.1P = 0  
1 wcm: 0xb6818000000038 dst\_int 0x0 ackflag 2 reassoc\_client 0 llm\_notif 0 ip  
20.\$=6v0.3 ip\_lt^\_Dv^\\7HnP6v^D6Hl5Ht^\_Dv\$6H8^ r^D6H>&5v8^  
r^D6H>&5v^D6Ht^M^Lw^\\7H8^ r  
\*Sep 1 05:55:02.401: 0021.5C8C.C761 20.20.20.3 RUN (20) Successfully plumbed  
mobile rule 1 wcm: C8F9.F983.4260 , slot 1 802.1P = 0^M  
\*Sep 1 05:55:02.401: 0021.5C8C.C761  
Sending IPv4 update to Controller 10.105.135.176 1 wcm: e  
\*Sep 1 05:55:02.401: 0021.5C8C.C761 Assigning Address 20.20.20.3 to mobile 1  
wcm: 05.135.176  
\*Sep 1 05:55:02.401: PEM recv processing msg Add SCB(3) 1 wcm: 20.20.3 to  
mobile  
\*Sep 1 05:55:02.401: 0021.5C8C.C761 20.20.20.3, auth\_state 20 mmRole Local !!!  
1 wcm: 135.176  
\*Sep 1 05:55:02.401: 0021.5C8C.C761 20.20.20.3, auth\_state 20 mmRole Local,  
updating wcdb not needed 1 wcm: 3.4260 , slot 1 802.1P = 0^M  
\*Sep 1 05:55:02.401: 0021.5C8C.C761 Tclas Plumb needed: 1 wcm: 0  
\*Sep 1 05:55:20.083: 0021.5C8C.C761  
Client stats update: 1 wcm: Time now in sec 1378014920, Last Acct Msg Sent at  
1378014902 sec