

FMC لبق نم FTD HA چمانرب ةرادإ متت

تايوت حمل

[قم دق م ل](#)

[ةيساس أال تابل طت م ل](#)

[تابل طت م ل](#)

[ةمدخت س م ل تانوك م ل](#)

[ةماع قرظن](#)

[ةيساس أ تاملول عم](#)

[ن يوك ت ل](#)

[ةيقرت ل ةمزح ل ي م ح ت 1. ةوطخ ل](#)

[دادعت س ل ا ص ح ف 2. ةوطخ ل](#)

[ل ا ع ر ف و ت ي ف FTD ة ي ق ر ت 3. ةوطخ ل](#)

[\(ي ر ا ي ت خ ا\) ط ش ن ن ل ا ر ي ظ ن ل ل ا ل ي د ب ت 4. ةوطخ ل](#)

[ي ئ ا ه ن ل ل ا ر ش ن ل ل ا 5. ةوطخ ل](#)

[ة ح ص ل ل ا ن م ق ق ح ت ل ل ا](#)

ةمدق م ل

رفوت ةلاح ي ف Cisco نم نم آال ةيامحل رادج ديدهت ةيامح ةيقرت ةيلمع دنتس م ل اذه فص ي ةيامحل رادج ةرادإ زكرم ةطساوب ةرادم ل ل ا ع.

ةيساس أال تابل طت م ل

تابل طت م ل

ةيلال عيضاوم ل ا ب ةفرعم ك ي دل نوك ت ن ا ب Cisco ي صوت:

- ةئيه ت ل ا و (HA) ي ل ا ع ل ا ر ف و ت ل ا م ي ه ا ف م
- (FMC) نم آال ةيامحل رادج ةرادإ زكرم ن يوك ت
- Cisco نم (FTD) ةيامحل رادج ديدهت ن ع نم آال ع ا ف د ل ا ن يوك ت

ةمدخت س م ل تانوك م ل

ي ل ا د ن ت س م ل ا ا ذ ه ي ف ة د ر ا و ل ا ت ا م و ل ع م ل ا د ن ت س ت

- 7.2.4 رادص ل ا ، (FMC) ي ر ه ا ظ ل ا ة ي ا م ح ل ا ر ا د ج ة ر ا د ا ز ك ر م
- 7.0.1 رادص ل ا ، Cisco نم ي ر ه ا ظ ل ا (FTD) ة ي ا م ح ل ا ر ا د ج د ي د ه ت د ص ع ا ف د ل ا ج م ا ن ر ب

ةصاخ ةيلمعم ةئيب ي ف ةدوجوم ل ا ةزهج أال نم دنتس م ل ا اذه ي ف ةدراول ا تاملول عم ل ا ءاشن ا مت تناك اذ ا. (يضا رت ف ا) حوسمم ن يوك ت ب دنتس م ل ا اذه ي ف ةمدخت س م ل ا ةزهج أال عيمج ت ا د ب ر م ا ي ا ل ل م ت ح م ل ا ر ي ث ا ت ل ل ك م ه ف ن م د ك ا ت ف ، ل ي غ ش ت ل ا د ي ق ك ت ك ب ش

ةمراع ةرظن

دحاوريظن ةيقرت ي ف (FMC) لكهال ةرادا ي ف مكحتلا ةدحو اب لمعت يتلا ةقيرطاللا لثمت لبق لشفلا زواجتل ،"طشنلا" م ث ،"دادعتسال" ةيلمع ءارجا متي ،ةيادلل ي ف .ةرم لك ي ف ةطشنلا ةيقرتلا لامكإ

ةيساسا تامولعم

ةيقرتلا لبق software.cisco.com نم ةيقرتلا ةمزح ليزنت بجي

طشنلا FTD ي ف show high-availability config رمالا ليغشتب مق ،(CLI) رماوا رطس ةهجاو ىلع يلعال رفوتلا ةلاح نم ققحتلل

```
> show high-availability config
Failover On
Failover unit Secondary
Failover LAN Interface: FAILOVER_LINK GigabitEthernet0/0 (up)
Reconnect timeout 0:00:00
Unit Poll frequency 1 seconds, holdtime 15 seconds
Interface Poll frequency 5 seconds, holdtime 25 seconds
Interface Policy 1
Monitored Interfaces 3 of 1285 maximum
MAC Address Move Notification Interval not set
failover replication http
Version: Ours 9.16(2)5, Mate 9.16(2)5
Serial Number: Ours 9AJJSEGJS2T, Mate 9AVLW3FSSK8
Last Failover at: 00:37:48 UTC Jul 20 2023

This host: Secondary - Standby Ready
  Active time: 4585 (sec)
  slot 0: ASAv hw/sw rev (/9.16(2)5) status (Up Sys)
    Interface INSIDE (10.10.153.2): Normal (Monitored)
    Interface diagnostic (0.0.0.0): Normal (Waiting)
    Interface OUTSIDE (10.20.153.2): Normal (Monitored)
  slot 1: snort rev (1.0) status (up)
  slot 2: diskstatus rev (1.0) status (up)

Other host: Primary - Active
  Active time: 60847 (sec)
  Interface INSIDE (10.10.153.1): Normal (Monitored)
  Interface diagnostic (0.0.0.0): Normal (Waiting)
  Interface OUTSIDE (10.20.153.1): Normal (Monitored)
  slot 1: snort rev (1.0) status (up)
  slot 2: diskstatus rev (1.0) status (up)
```

Stateful Failover Logical Update Statistics

```
Link : FAILOVER_LINK GigabitEthernet0/0 (up)
Stateful Obj   xmit      xerr      rcv        rerr
General        9192       0         10774      0
sys cmd        9094       0         9092       0
...
Rule DB B-Sync 0           0           0           0
Rule DB P-Sync 0           0           204         0
Rule DB Delete 0           0           1           0
```

Logical Update Queue Information

	Cur	Max	Total
Recv Q:	0	9	45336
Xmit Q:	0	11	11572

ةيقرتلا عباتف ،ةرهاظ اطاخأ كانه نكت مل اذا

نيوكتلا


ةيقرتلا ةمزح ليحت 1. ةوطخال

- ةيوسرلا مدختس مل ةهجاو مادختساب FMC لىل FTD ةيقرت ةمزح ليحتب مق رادصا و FTD زارط لىل ادا نسا Cisco جمارب عقوم نم اقبس م ارجالا اذه ليزنت بجي ةبغرلا .




هتيقرت متيس يذلا ديجلا FTD رادصا يواسي وا لىل عا FMC رادصا نا نم دكات ريذحت

تأثير تحديثات > ملاحظة

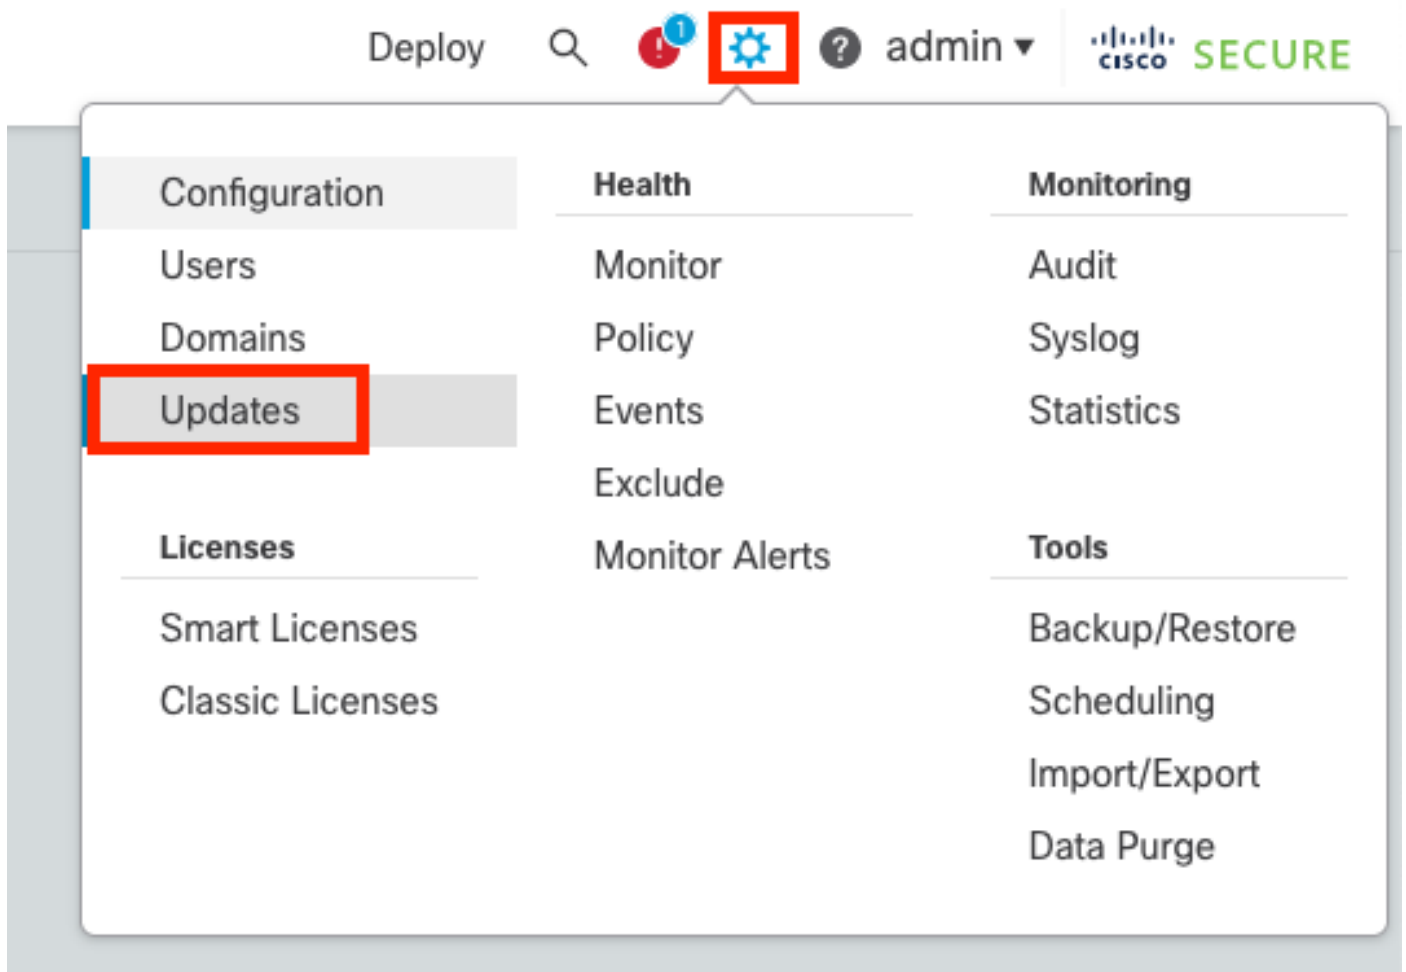

- ل.م.ح.ت.ل.ث.د.ح.ت.د.ح.

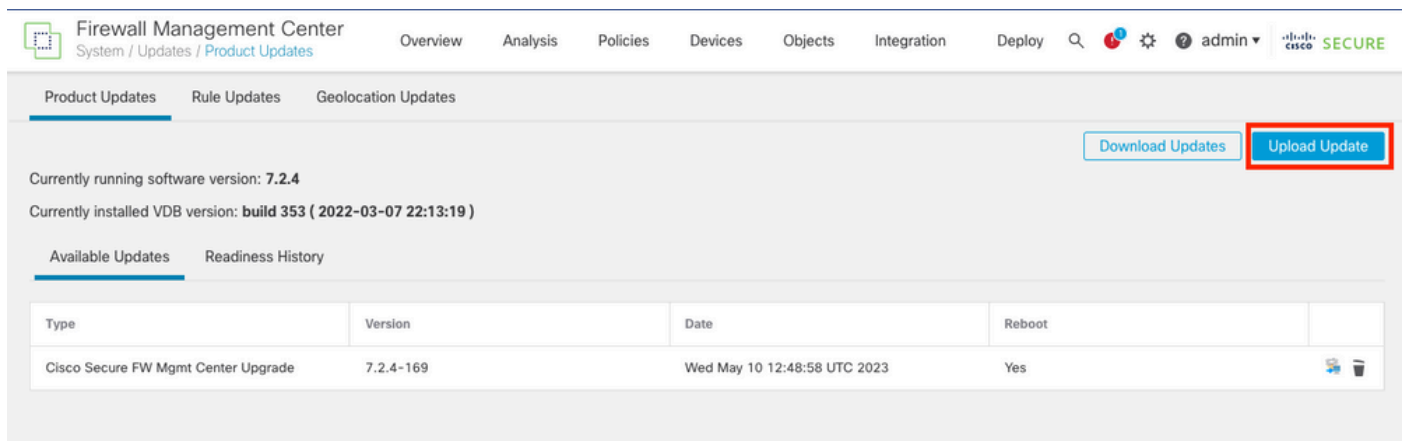

- ل.م.ح.ت.ل.ث.د.ح.ت.د.ح.م.ث.، اقباس اهليزنت مت يتل ةروصل نع اثح ب حفت

Firewall Management Center
System / Updates / Product Updates

Overview Analysis Policies Devices Objects Integration Deploy

Product Updates Rule Updates Geolocation Updates

Currently running software version: 7.2.4

Updates

Upload software updates and patches here.

Action Upload local software update package
 Specify software update source (Firewall Threat Defense devices only)

Package Cisco_FTD_Upgrade-7.2.4-165.sh.REL.tar

Cancel Upload

دادعتسالا صحف 2. ةوطخل

ةيقرتلة عباتمل ةزهج ةزهجالا تناك اذا ام دادعتسالا صحف تايلمع دكؤت.

- ةححصلا ةيقرتلة مزح يف تيبتتلا رايخ دح.

Firewall Management Center
System / Updates / Product Updates

Overview Analysis Policies Devices Objects Integration Deploy





Product Updates Rule Updates Geolocation Updates

Download Updates Upload Update

Success
Upload succeeded

Currently running software version: 7.2.4
Currently installed VDB version: build 353 (2022-03-07 22:13:19)

Available Updates Readiness History

Type	Version	Date	Reboot	
Cisco Secure FW Mgmt Center Upgrade	7.2.4-169	Wed May 10 12:48:58 UTC 2023	Yes	 
Cisco FTD Upgrade	7.2.4-165	Wed May 3 20:22:28 UTC 2023	Yes	 

ل ديدحتلا نوكي، ةلحال هذه يف. اهلضفت يتلا ةيقرتلا دح

- قباسلا رادصإلا إله ةدوعلاو ةيقرتلا لشف دنع يئاقلتلا ءاغلإلا
- ةحجانلا ةيقرتلا دعب عاجرالا نيكمت
- snort 3 إله 2 جم انربلا ةيقرت
- دادعتسالا نم ققحتلا قوف رقناو FTD ب ةصاخلا HA ةومجم دح.

Product Updates Rule Updates Geolocation Updates

Currently running software version: 7.2.4

Selected Update

Type	Cisco FTD Upgrade
Version	7.2.4-165
Date	Wed May 3 20:22:28 UTC 2023
Reboot	Yes

Automatically cancel on upgrade failure and roll back to the previous version (Applies to individual units in HA or Clusters)

Enable revert after successful upgrade

Upgrade Snort 2 to Snort 3
After the software upgrade, eligible devices will upgrade from Snort 2 to Snort 3 when you deploy configurations. For devices that are ineligible because they use custom Intrusion or Network Analysis Policies, we strongly recommend you manually upgrade to Snort 3 for improved detection and performance. [Learn more](#)

By Group

<input checked="" type="checkbox"/>	Ungrouped (1 total)	Compatibility Check	Readiness Check Results	Readiness Check Completed	Snort 3	Estimated Upgrade Time	
<input checked="" type="checkbox"/>	FTD_HA Cisco Firepower Threat Defense for VMware Cluster						
<input checked="" type="checkbox"/>	FTD_A (active) 10.4.11.87 - Cisco Firepower Threat Defense for VMware v7.0.1	Compatibility check passed. Proceed with			N/A	10 min	
<input checked="" type="checkbox"/>	FTD_B 10.4.11.86 - Cisco Firepower Threat Defense for VMware v7.0.1	Compatibility check passed. Proceed with			N/A	10 min	

ماهمال > لئاسرلا زكرم لئاسر ي ف مدقتلا نم ققحتلا نكمي

Policies Devices Objects Integration Deploy

admin

SECURE

Deployments Upgrades Health Tasks

20+ total 0 waiting 0 running 0 retrying 20+ success 0 failures

Filter

Remote Readiness Check

Checking Cisco FTD Upgrade 7.2.4-165 on [FTD_HA] 2m 11s

10.4.11.86: Success. OK to upgrade to 7.2.4-165 version.

10.4.11.87: Success. OK to upgrade to 7.2.4-165 version.

ءارج نكمي، "ءاجن" يه ءءيتنل او FTD نم لك ي ف دادءتسالال نم ققحتلا لامك متي امءنع ءيقرتلا

By Group

<input type="checkbox"/>	Ungrouped (1 total)	Compatibility Check	Readiness Check Results	Readiness Check Completed	Snort 3	Estimated Upgrade Time	
<input type="checkbox"/>	FTD_HA Cisco Firepower Threat Defense for VMware Cluster						
<input type="checkbox"/>	FTD_A (active) 10.4.11.87 - Cisco Firepower Threat Defense for VMware v7.0.1	Compatibility check passed. Proceed with	Success	2023-07-20 14:33:00	N/A	10 min	
<input type="checkbox"/>	FTD_B 10.4.11.86 - Cisco Firepower Threat Defense for VMware v7.0.1	Compatibility check passed. Proceed with	Success	2023-07-20 14:33:00	N/A	10 min	

لاع رفوت ي ف FTD ءيقرت 3 ءوطءالا

• تېبثت قوف رقن او HA چوز ددح .

Firewall Management Center
System / Updates / Upload Update

Overview Analysis Policies Devices Objects Integration Deploy admin

Product Updates Rule Updates Geolocation Updates

Warnings

- Version 7.2.0 onwards, the Intelligent Application Bypass (IAB) setting is deprecated for ... [See More](#)
- Version 7.2.0 onwards, the port_scan inspector is deprecated for Snort 3 ... [See More](#)

Currently running software version: 7.2.4

Selected Update

Type	Cisco FTD Upgrade
Version	7.2.4-165
Date	Wed May 3 20:22:28 UTC 2023
Reboot	Yes

Automatically cancel on upgrade failure and roll back to the previous version (Applies to individual units in HA or Clusters)

Enable revert after successful upgrade

Upgrade Snort 2 to Snort 3
After the software upgrade, eligible devices will upgrade from Snort 2 to Snort 3 when you deploy configurations. For devices that are ineligible because they use custom Intrusion or Network Analysis Policies, we strongly recommend you manually upgrade to Snort 3 for improved detection and performance. [Learn more](#)

By Group

<input checked="" type="checkbox"/>	Ungrouped (1 total)	Compatibility Check	Readiness Check Results	Readiness Check Completed	Snort 3	Estimated Upgrade Time	
<input checked="" type="checkbox"/>	FTD_HA Cisco Firepower Threat Defense for VMware Cluster						
<input checked="" type="checkbox"/>	FTD_A (active) 10.4.11.87 - Cisco Firepower Threat Defense for VMware v7.0.1	Compatibility check passed. Proceed with	Success	2023-07-20 14:33:00	N/A	10 min	
<input checked="" type="checkbox"/>	FTD_B 10.4.11.86 - Cisco Firepower Threat Defense for VMware v7.0.1	Compatibility check passed. Proceed with	Success	2023-07-20 14:33:00	N/A	10 min	

Back Check Readiness Install

OK. ددح . ةققرتلا لامك إل ديهمتلا ةداعإب ماظنلا موقوي ، ةققرتلا ةعبات مل ريذحت

10.88.243.115:43092


Update installation will reboot the system(s). Are you sure you want to continue?

Cancel OK

ماهملا > لئاسرلا زكرم لئاسر ري ف مدقتلا نم ققحتلا نكمي

Deployments Upgrades **Health** **Tasks** Show Notifications

20+ total | 0 waiting | 1 running | 0 retrying | 20+ success | 0 failures

 Remote Install

Apply Cisco FTD Upgrade 7.2.4-165 to FTD_HA 8m 57s

FTD_B : Upgrade in progress: (14% done.12 mins to reboot). Updating Operating System...
(300_os/100_install_Fire_Linux_OS_aquila.sh (in background: 200_pre/600_ftd_onbox_data_export.sh))

firepower: View details.

تالچس وەي مۆس رەق ي رط ب م دقت لال ضرع م تي ، ل ي ص اف ت لال ضرع FirePOWER: قوف ت ر ق ن ا ذ ا
status.log.

Upgrade in Progress



FTD_B

10.4.11.86

Cisco Firepower Threat Defense for VMware (Version: 7.0.1-84)

Version: 7.2.4-165 | **Size:** 1.04 GB | **Build Date:** May 3, 2023 8:22 PM UTC

Initiated By: admin | **Initiated At:** Jul 20, 2023 2:58 PM EDT



14% Completed (12 minutes left)

Upgrade In Progress...

Updating Operating System... (300_os/100_install_Fire_Linux_OS_aquila.sh (in background: 200_pre/600_ftd_onbox_data_export.sh))

• Upgrade will automatically cancel on failure and roll back to the previous version.

Log Details



```
Thu Jul 20 18:56:51 UTC 2023 7% Running script 200_pre/202_disable_syncd.sh... 13 mins
Thu Jul 20 18:56:51 UTC 2023 7% Running script 200_pre/400_restrict_rpc.sh... 13 mins
Thu Jul 20 18:56:51 UTC 2023 7% Running script 200_pre/500_stop_system.sh... 13 mins
Thu Jul 20 18:57:17 UTC 2023 7% Running script 200_pre/501_recovery.sh... 13 mins rema
Thu Jul 20 18:57:18 UTC 2023 14% Running script 200_pre/505_revert_prep.sh... 12 mins
Thu Jul 20 18:58:05 UTC 2023 14% Running script 200_pre/999_enable_sync.sh... 12 mins
Thu Jul 20 18:58:05 UTC 2023 14% Running script 300_os/001_verify_bundle.sh... 12 mins
Thu Jul 20 18:58:06 UTC 2023 14% Running script 300_os/002_set_auto_neg.pl... 12 mins
Thu Jul 20 18:58:06 UTC 2023 14% Running script 300_os/060_fix_fstab.sh... 12 mins re
Thu Jul 20 18:58:06 UTC 2023 14% Running script 300_os/100_install_Fire_Linux_OS_aqui
```

Cancel Upgrade

Close

FTD لكل ة قيقو د 20 ي لاوح ة قيقرت لا قرغت ست :ة طحال م

ري ب خ ي ل ل ق ت ن ا : /ngfw/var/log/sf/ دل ج م ن ي س ح ت ي ف ت ص ح ف ت ن ك ع ي ط ت س ي م د ق ت ، ي ف C L I
ذ ف ن م ر ذ ج ل ل ل خ د ا و ب و ل س ا

```
> expert
admin@firepower:~$ sudo su
Password:
root@firepower:/home/admin# cd /ngfw/var/log/sf

root@firepower:/ngfw/var/log/sf# ls
Cisco_FTD_Upgrade-7.2.4

root@firepower:/ngfw/var/log/sf# cd Cisco_FTD_Upgrade-7.2.4

root@firepower:/ngfw/var/log/sf/Cisco_FTD_Upgrade-7.2.4# ls
000_start AQ_UUID DBCheck.log finished_kickstart.flag flags.conf main_upgrade_script.log status.log

root@firepower:/ngfw/var/log/sf/Cisco_FTD_Upgrade-7.2.4# tail -f status.log
```

```
state:running
ui:Upgrade has begun.
ui: Upgrade in progress: ( 0% done.14 mins to reboot). Checking device readiness... (000_start/000_00_r
...
ui: Upgrade in progress: (64% done. 5 mins to reboot). Finishing the upgrade... (999_finish/999_zzz_com
ui: Upgrade complete
ui: The system will now reboot.
ui:System will now reboot.
```

Broadcast message from root@firepower (Thu Jul 20 19:05:20 2023):

System will reboot in 5 seconds due to system upgrade.


Broadcast message from root@firepower (Thu Jul 20 19:05:25 2023):

System will reboot now due to system upgrade.


Broadcast message from root@firepower (Thu Jul 20 19:05:34 2023):

The system is going down for reboot NOW!

رہظاتو، (GUI) ڈیوسررلا مدختسملا هجواو یلع ةیقرتلا ؤلاح یلع "لمتكم" ةمالع عضو متي ةیلالاتاوطخلا.

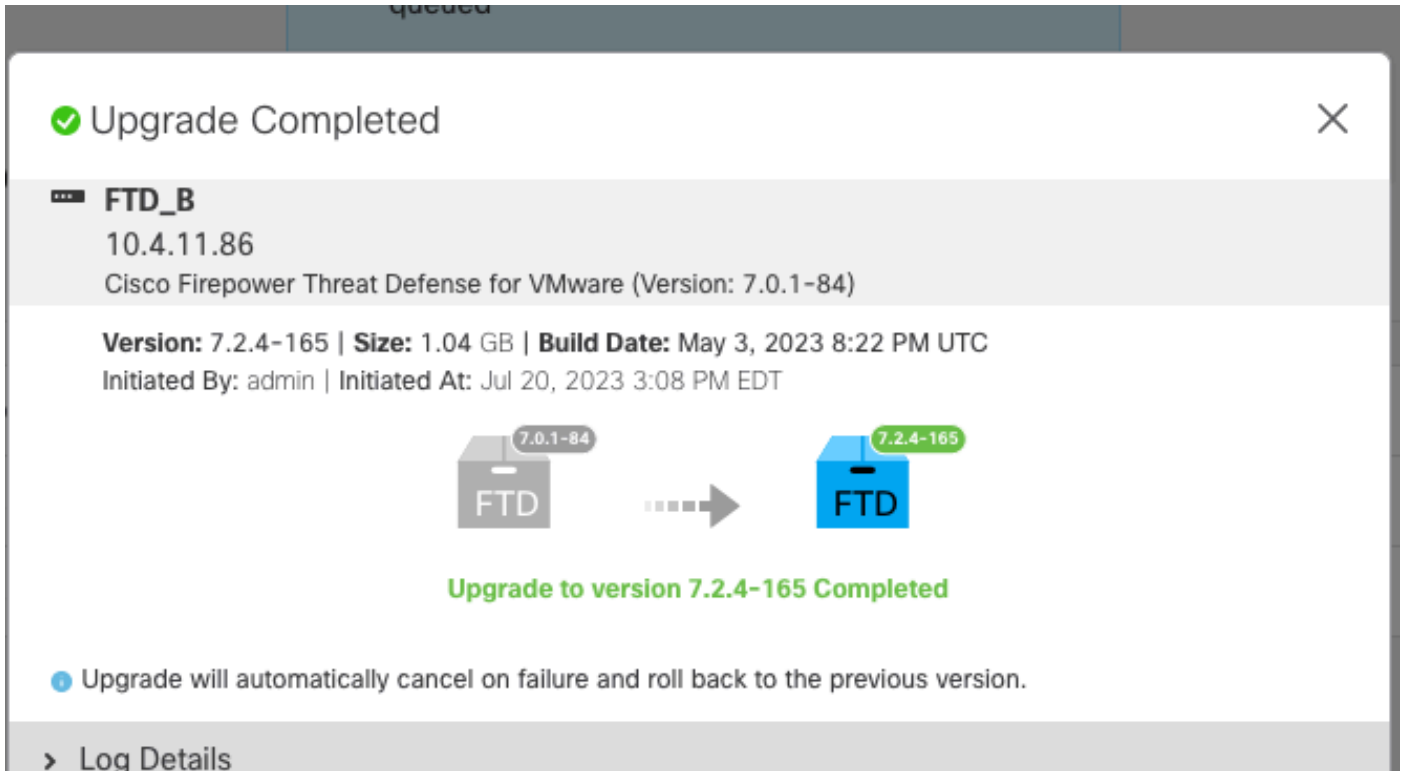

طشنلا زاهجال یف أدبت، یطايتحال زاهجال یف ةیقرتلا لامتك دعب.

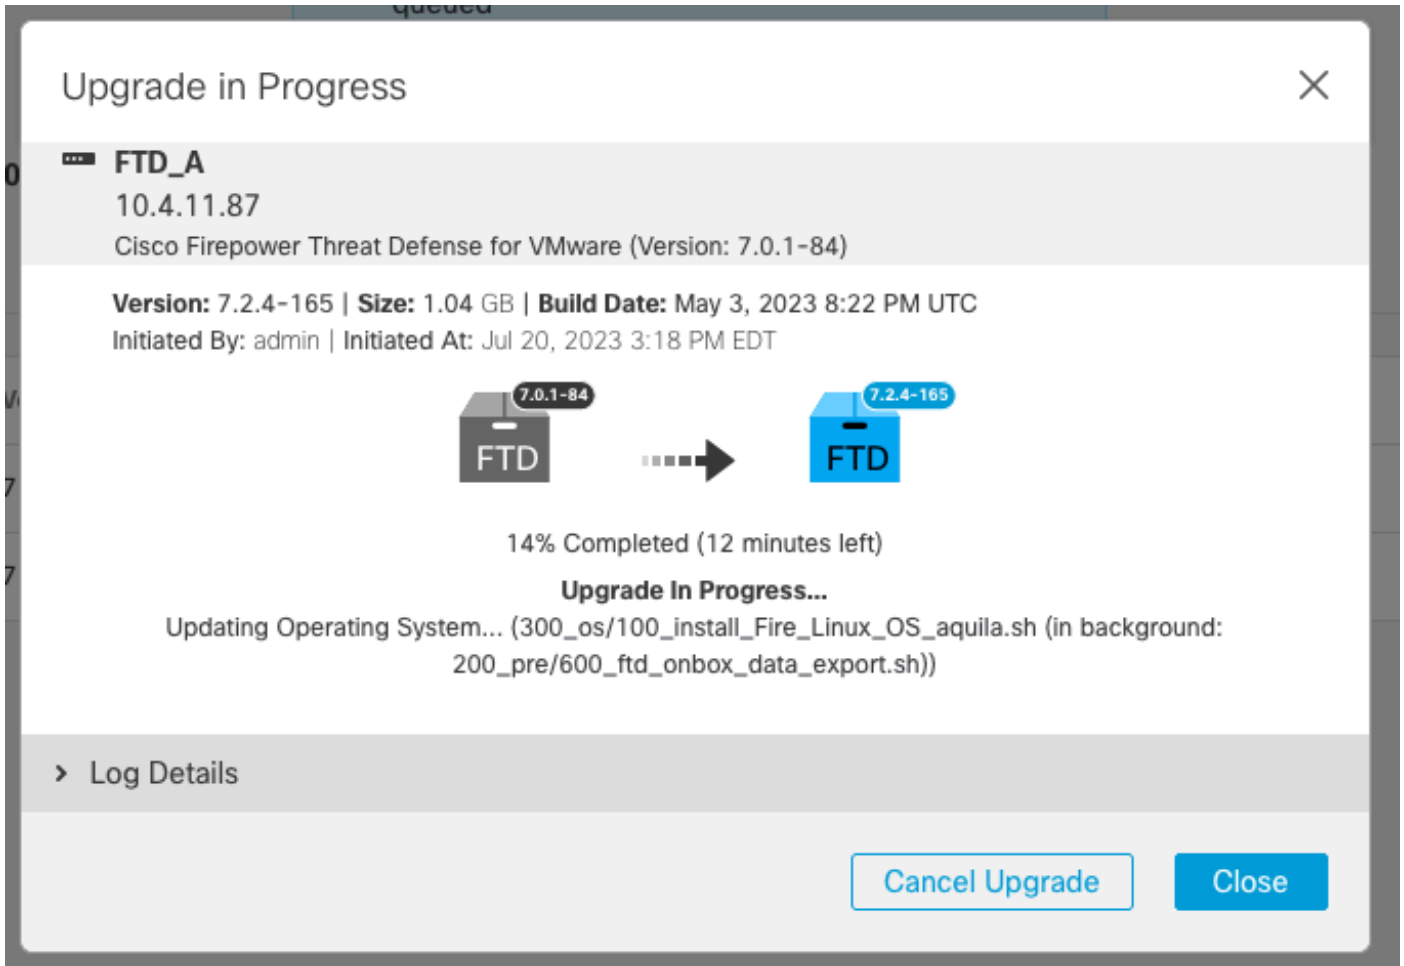

(موظفون لا معدل في صيخشت لرم أو أال رطس ةه جاو) LINA إلى لوقت نا، (CLI) رماو أال رطس ةه جاو في
show failure over state رماو أال مادخت ساب دادعت سالا عضو في فTD لشف لزوجت ةلاح نم ققحت و
state.


```
> system support diagnostic-cli
Attaching to Diagnostic CLI ... Press 'Ctrl+a then d' to detach.
Type help or '?' for a list of available commands.
```

```
firepower> enable
Password:
firepower# show failover state
```

	State	Last Failure Reason	Date/Time
This host -	Secondary		
	Standby Ready	None	
Other host -	Primary		
	Active	None	

```
====Configuration State====
  Sync Done - STANDBY
====Communication State====
  Mac set
```

```
firepower#
  Switching to Active
```

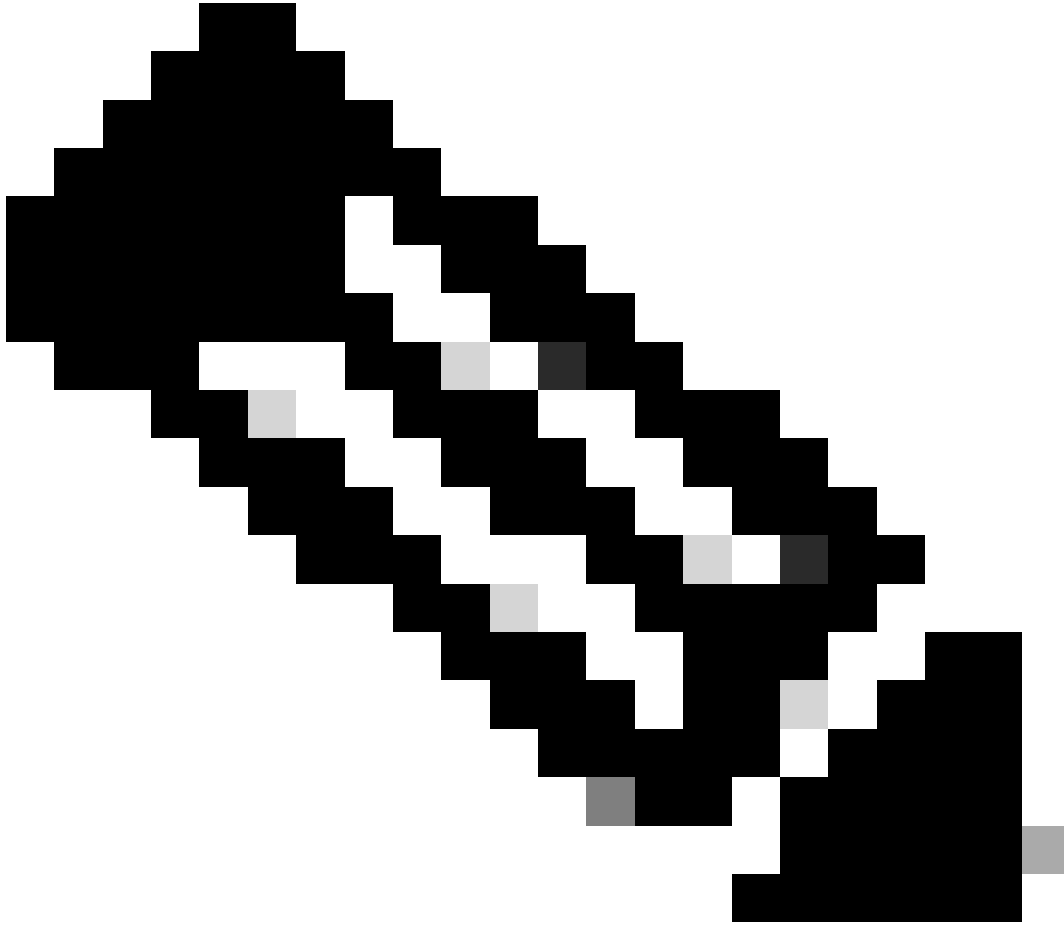

ديهمت ةداعإ تايلمع لبق. ةققرتلا نم عزك اياقلا لشفلا زواجت ثدحي: ةطحال م
ةققرتلا لامكإو ةطشنلا FTD.

ليغشتلا ةداعإ مزلي، ةققرتلا لامتك دنع

✔ Upgrade Completed



FTD_A

10.4.11.87

Cisco Firepower Threat Defense for VMware (Version: 7.0.1-84)

Version: 7.2.4-165 | **Size:** 1.04 GB | **Build Date:** May 3, 2023 8:22 PM UTC

Initiated By: admin | **Initiated At:** Jul 20, 2023 3:28 PM EDT




Upgrade to version 7.2.4-165 Completed

> Log Details

Close

(يراي تخا) طشنن لاريظنن لايديت 4. ةوطخال

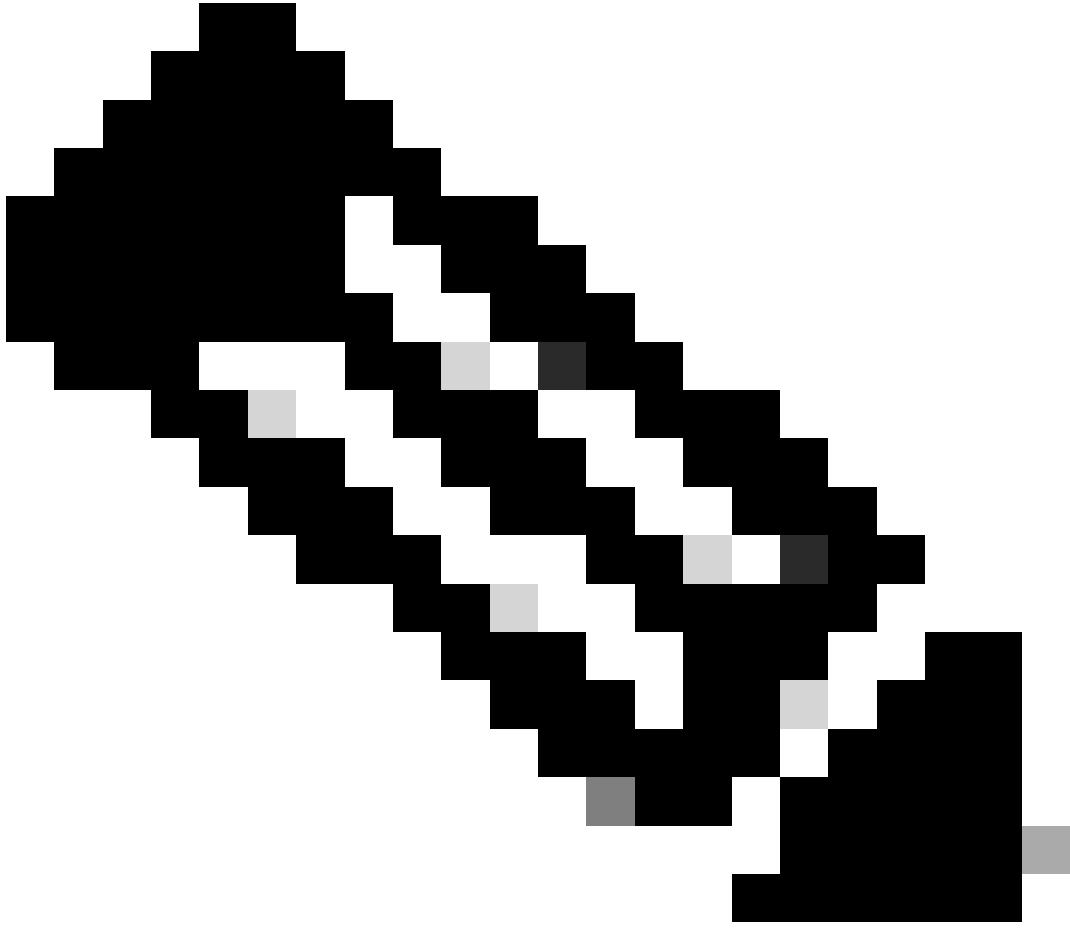

يتم ايلم ع ريثأت يا هل نوكي ال هناف، اطشن يوناثلا زاهجلا ناك اذا: عظهارم دعاست ةسرامم لصفأ وه دادعتسالال لثم يوناثو طشن ياساسأ زاهج يلع رفوتلانا إن شدحي نأ نكمي لشف زواجت يا بقعت يلع

لشفال زواجت مادختسإ نكميو، دادعتسالال عضو يف نأل ال FTD Active نوكي، ةلجالا هذه يف ال Active يلإ ىرخأ ةرم هنييعل يوديلا

- ريرحتلا ةمالعل ةرواجملا ثالثللا طاقنلا يلإ لقتنا

View By: Group
 All (2) ● Error (0) ● Warning (0) ● Offline (0) ● Normal (2) ● Deployment Pending (1) ● Upgrade (2) ● Snort 3 (2) 🔍 Search Device **Add**

[Collapse All](#)

<input type="checkbox"/>	Name	Model	Ver...	Chassis	Licenses	Access Control Policy	Auto RollBack	
<input type="checkbox"/>	Ungrouped (1)							
<input type="checkbox"/>	FTD_HA High Availability							
<input checked="" type="checkbox"/>	FTD_A(Primary, Standby) 10.4.11.87 - Routed	FTDv for VMware	7.2.4	N/A	Base, Threat (1 more...)	policy_lab	↶	⋮
<input checked="" type="checkbox"/>	FTD_B(Secondary, Active) 10.4.11.86 - Routed	FTDv for VMware	7.2.4	N/A	Base, Threat (1 more...)	policy_lab	↶	⋮

• طشنلا لوح مالا ريظن ددح.

View By: Group
 All (2) ● Error (0) ● Warning (0) ● Offline (0) ● Normal (2) ● Deployment Pending (1) ● Upgrade (2) ● Snort 3 (2) 🔍 Search Device **Add**

[Collapse All](#)

<input type="checkbox"/>	Name	Model	Ver...	Chassis	Licenses	Access Control Policy	Auto RollBack	
<input type="checkbox"/>	Ungrouped (1)							
<input type="checkbox"/>	FTD_HA High Availability							
<input checked="" type="checkbox"/>	FTD_A(Primary, Standby) 10.4.11.87 - Routed	FTDv for VMware	7.2.4	N/A	Base, Threat (1 more...)	policy_lab	↶	⋮
<input checked="" type="checkbox"/>	FTD_B(Secondary, Active) 10.4.11.86 - Routed	FTDv for VMware	7.2.4	N/A	Base, Threat (1 more...)	policy_lab	↶	⋮

Switch Active Peer

Break

Force refresh node status

Delete

Revert Upgrade

Health Monitor

Troubleshoot Files

• لشفال زواجت ديكأتل معن ددح.

Switch Active Peer

Are you sure you want to make "FTD_A" the active peer?

No

Yes

لش فل زواجت وة قرت الة يه ان في لال ال رفوت الة لاج نم ققحت الة
ة زه الة اءا ا > ة زه ا

Firewall Management Center
Devices / Device Management

Overview Analysis Policies **Devices** Objects Integration Deploy

View By: Group

All (2) Error (0) Warning (0) Offline (0) Normal (2) Deployment Pending (1) Upgrade (2) Snort 3 (2)

Deployment History

Search Device Add

Collapse All

Name	Model	Ver...	Chassis	Licenses	Access Control Policy	Auto RollBack
Un grouped (1)						
FTD_HA High Availability						
FTD_A(Primary, Active) Snort 3 10.4.11.87 - Routed	FTDv for VMware	7.2.4	N/A	Base, Threat (1 more...)	policy_lab	
FTD_B(Secondary, Standby) Snort 3 10.4.11.86 - Routed	FTDv for VMware	7.2.4	N/A	Base, Threat (1 more...)	policy_lab	

يئه ان الة رشن الة 5. ة وطل الة

- زاه الة اءه الة رشن > رشن ة زه الة الة ة سايس رشن

Cisco Firepower Extensible Operating System (FX-OS) v2.12.0 (build 499)
Cisco Firepower Threat Defense for VMware v7.2.4 (build 165)

> show failover state

	State	Last Failure Reason	Date/Time
This host -	Primary Active	None	
Other host -	Secondary Standby Ready	None	

====Configuration State====

====Communication State====

Mac set

> show failover

Failover On

Failover unit Primary

Failover LAN Interface: FAILOVER_LINK GigabitEthernet0/0 (up)

Reconnect timeout 0:00:00

Unit Poll frequency 1 seconds, holdtime 15 seconds

Interface Poll frequency 5 seconds, holdtime 25 seconds

Interface Policy 1

Monitored Interfaces 3 of 1285 maximum

MAC Address Move Notification Interval not set

failover replication http

Version: Ours 9.18(3)39, Mate 9.18(3)39

Serial Number: Ours 9AVLW3FSSK8, Mate 9AJJSEGJS2T

Last Failover at: 19:56:41 UTC Jul 20 2023

This host: Primary - Active

Active time: 181629 (sec)

slot 0: ASAv hw/sw rev (/9.18(3)39) status (Up Sys)

Interface INSIDE (10.10.153.1): Normal (Monitored)

Interface OUTSIDE (10.20.153.1): Normal (Monitored)

Interface diagnostic (0.0.0.0): Normal (Waiting)

slot 1: snort rev (1.0) status (up)

slot 2: diskstatus rev (1.0) status (up)

Other host: Secondary - Standby Ready

Active time: 2390 (sec)

Interface INSIDE (10.10.153.2): Normal (Monitored)

Interface OUTSIDE (10.20.153.2): Normal (Monitored)

Interface diagnostic (0.0.0.0): Normal (Waiting)

slot 1: snort rev (1.0) status (up)

slot 2: diskstatus rev (1.0) status (up)

Stateful Failover Logical Update Statistics

Link : FAILOVER_LINK GigabitEthernet0/0 (up)

Stateful Obj	xmit	xerr	rcv	rerr
General	29336	0	24445	0
sys cmd	24418	0	24393	0

...

Logical Update Queue Information

	Cur	Max	Total
Recv Q:	0	11	25331
Xmit Q:	0	1	127887

نوكت ذئنيح ، ةميس يلاعلا رفوتلا ةلاح تناكو رادصإلا سفن يلع FTD نم لك ناك اذا

ةلمتكم ةيقرتلا

ةمچرتل هذه ل و ح

ةلأل تاي نقتل ن م ة و مچ م ادخت ساب دن تسم ل ا ذه Cisco ت مچرت
م ل ا ل ا ا ن ا ع مچ ي ف ن ي م دخت س م ل ل م عد ي و ت ح م م ي دقت ل ة ي ر ش ب ل و
امك ة ق ي ق د ن و ك ت ن ل ة ي ل ا ة مچرت ل ض ف ا ن ا ة ظ ح ال م ي ج ر ي . ة ص ا خ ل ا م ه ت غ ل ب
Cisco ي ل خ ت . ف ر ت ح م مچرت م ا ه م د ق ي ي ت ل ا ة ي ف ا ر ت ح ال ا ة مچرت ل ا ع م ل ا ح ل ا و ه
ي ل ا م ا د ع و ج ر ل ا ب ي ص و ت و ت ا مچرت ل ا هذه ة ق د ن ع ا ه ت ي ل و ئ س م Cisco
Systems (ر ف و ت م ط ب ا ر ل ا) ي ل ص ا ل ا ي ز ي ل ج ن ا ل ا دن ت س م ل ا