

حاتفم 9000 ةزافح ةدام ىلع MPLS تقوقد

تايوتحمل

[ةمدقملا](#)

[ةيساسألا تابلطتملا](#)

[تابلطتملا](#)

[ةمدختسملا تانوكملا](#)

[ةيساسأ تامولعم](#)

[تاحلطم](#)

[ققحتلاو نيوكتلا](#)

[MPLS بلق يف ةدحاو ةوطخلا رواجت عم L3VPN 1. ويرانيسلا](#)

[نيوكتلا ليصافت](#)

[يساسألا ققحتلا](#)

[ةئدابلا ةجمرب](#)

[VPNv4 تايست ةجمرب](#)

[LDP تايست ةجمرب](#)

[P و PEs تاهجوم ني ب ECMP عم L3VPN 2. ويرانيسلا](#)

[نيوكتلا ليصافت](#)

[يساسألا ققحتلا](#)

[ةئدابلا ةجمرب](#)

[VPNv4 تايست ةجمرب](#)

[LDP تايست ةجمرب](#)

[امحالص او ةزهجال ريوطت عاااخأ فاشكتسأ](#)

[ةزهجال MPLS ةمظنا](#)

[ةزهجال ةحص نم ققحتلا رماو](#)

[IPv4 جالعو MPLS قاطن دح](#)

[TAC ل عيمجتلا رماو](#)

[ةلص تاذا تامولعم](#)

ةمدقملا

(MPLS) تالوكوتوربلا ددعتم ةيمستلا ليوحت نيوكت ةيفي دنستسما اذه فصي Catalyst 9000 تالوحم ىلع هتحص نم ققحتلاو (VPN) ةيرهاطلا ةصاخلا ةكبشلا 3 ةقبطلل Series Switches.

ةيساسألا تابلطتملا

تابلطتملا

ةيلاتلا عيضاوملاب ةفرعم كيديل نوكت ناب Cisco ي صوت:

- IP هيجوت ةداعا

- BGP (BGP) ةي دودحل ةب اوبال لوكوتورب
- MPLS

ةمدخت سمل اناوكملا

ةي لالت ةي داملا اناوكملا و اوجماربال اارادصل اىل دنن سمل اذ ةي ةدراول تامول عمل دنن ست

- C9500 لىل Cisco IOS® XE 16.12.4
- C9300 لىل Cisco IOS® XE 16.12.4
- C3850 لىل Cisco IOS® XE 16.9.6

ةصاخ ةي لمعم ةئيبي ةي ةدوجوملا ةزهجال نم دنن سمل اذ ةي ةدراول تامول عمل ااشن ا مت تنك اذ ا. (يضا رتفا) حوسمم نيوكتب دنن سمل اذ ةي ةمدخت سمل ةزهجال ةي مچ ت ادب رما يال لم تحت حمل ري ثاتلل كم هف نم دكاتف ، ليغش الت دي ق ك تكبش

ةي ساسا تامول عم

BGP م دخت سي ريظن اىل ريظن ج ذومن MPLS نم (L3VPN) 3 ةق بطل VPN تاكبش م دخت ست ع قاوملا نم ةعومجم نم MPLS VPN نوكتي . VPN ةك بشب ةق لعت ملام تامول عمل ا ع يزوتل ةدحاو لمعت ، االمعلا ع قاوم نم ع قوم لك ةي . MPLS دوزمل ةي ساسا ةك بشب ةطساوب ةلصت ملام ةزهجال ري فوت لىل رثك ا و ا دحاوب ةلصت ملام (CE) االمعلا ةي ف رطل ةزهجال نم رثك ا و ا (PE) ةي ف رطل

ع مچ ل وحم لك ج رخت سي ، ةك بشل ةمزل ربت ام نيبي ، 3 ةق بطل نم يدي لقتل ا هي جوتل ا ةي هذو مادخت سا متي م ث . 3 ةق بطل سار نم ةمزل ا هي جوت ةداع ا ةلصل ا تا ذ تامول عمل ا ةمزل ةي لالت ا ةوطخل ا دي دحتل ا هي جوت لودج ةي ف ث حبل لسره فك تامول عمل ا

، ةه جولا ناو نع ل قح وه سارل ا ةي ةلصل ا و ذ دي حولا ل قحلا نوكي ، اعويش رثك ا ةلحلا ةي بجي ، كلذل ةجيتنو . اضي ا ةلصل ا تا ذ ا رخال سارل ا ل قح نوكت دق ، ا ل ا حلا ضعب ةي ف نكلو ، كلذل ا ةفاضل ا بو . ةمزل ا هلاخ نم رمت ل وحم لك ةي ف لقت سمل لك بشب سارل ا لي لحت ا رجا ، ل وحم لك لىل دق عم لودج ث حب ا رجا اضي ا بجي .

سار نيي عت متي كلذل دع ب . طقف ةدحاو ةرم 3 ةق بطل سار لي لحت متي ، ةي مس لتل ا لي وحت ةي ف abEI . ي مس ت ةل كي هم ريغ ل وطل ا ةت باث ةمي ق ةي ف 3 ةق بطل ا

س وورل ا كلت نا املاط ، ةي مس لتل ا س فن اىل ا م جرتت نا ةف لتخملا س وورل ا نم دي دعلل نكمي **ؤفاكت ةئف** ةي مس لتل ا ل ثمت ، ع قاو ا ةي ف . ةي لالت ا ةوطخل ل را ي ت خالا س فن اىل ا ام ئاد ي دؤت زيي م لتل ا نكمي ، اهنع تفل تفل ت خا ام هم ، ي ت ل مزل ا نم ةعومجم ي (FEC) **هي جوتل ا ةداع** . هي جوتل ا ةداع ةفي ظو ةطساوب اهنبي

ةمزل سار تا يوتحم لىل ع ري صر ح لك بشب اس سؤم ةي مس لتل ا لي ل ووال را ي ت خالا نوكي نا مزلي ال تا وطل خالا ةي ف مزل ا هي جوت ةداع ا ا رارقلا دنن ست نا نكمي ، ل ا ثملا لي بس لىل ع 3 ةق بطل ا لىل ا لامواع لىل اضي ا ةي لالت ا

م تي . 3 ةق بطل ا ةمزل ا ةمدقم ةي ف ةري صق ةي مس لتل ا سار ةفاضل ا متت ، ةي مس لتل ا نيي عت درجم نم ل وحم لك لال خ نم ةي لالت ا تا وطل خالا ةي ف . ةمزل ا نم عزك ةك بشل ا ربت سارل ا اذ ل قن لودج ث حب لال خ نم ا رارقلا ا ذ ا ت ا متي و تا ي م س لتل ا لي دبت متي ، ةك بشل ا ةي ف MPLS ا ل وحم سار مي ي ق ت ةداع ا مزلي ال ، ي لالت ا بو . ةمزل ا سار ةي ف ةل حرملا ةي مس لتل ا MPLS هي جوت ةداع ا ، لك ي هم ريغو تباث لوط تا ذ ةي مس لتل ا نال ارظنو . ةك بشل ا لال خ نم ةمزل ا ل قن ا نثا ةمزل ا ، اعوس دح لىل ع ةي رس و ةرشابم نوكت MPLS هي جوت ةداع ا لودج ةي ف ث حبل ا ةي لمع ا ف

قلعتي اميف لقتسم يلحم رارق داختاب ةكبشال ي (LSR) ةيمست ليوت هجوم لك موقبي نارتقالا اذه فرعي. هيجوتلال ةداع| وُفاكت ةئف ليثمتل اهمادختسا متي ةيمست ةميق ياب متي. اهب تماق يتلا ةيمستلا طباورب اهناريح مالعاب LSR لك موقت. ةيمست طبرب: تالوكوتوربال هذه ةطساوب ةرواجمال تالوحملا ةطساوب ةيمستلا طباورل يعوللا اذه ليهست

- زهجالا يلا ةدنتسملا لدعملال ديدحت تاودأ نيكمت - (LDP) ةيمستلا عيزوت لوكوتورب رب هيجوتلال ةداع| معدل ةيمستلا تامولعمل لدابت نم MPLS ةكبش ي ف ةريظنلا (LSR) MPLS ةكبش ي ف ةدحاولا ةوطخلال
- ةيضارتفالال ةصاخلا MPLS تاكبش معدل مدختسي - (BGP) ةيدودخلال ةرابعلال لوكوتورب (VPN)

اهلقن متي يتلا ةيمستلا ةميق نوكت، ل LSR B يلا LSR A نم ةامسم ةمزح لاسرا متي ام دنع ةداع| وُفاكت ةئف ليثمتل LSR B اهنبيعت مت يتلا ةيمستلا ةميق يه IP ةمزح ةطساوب ةكبشلال IP ةمزح زايح| عم ةيمستلا ةميق ريغتت، يلاتالابو. ةمزحلل هيجوتلال

ليلدلا اذه مادختسا ةيفيك

يف زهجالا يوتسم نم ققحتلال مسق مي دقت متيو، ني هوييرانيس يلا ليلدلال ميسقت مت دنتسملال ةياهن:

- MPLS زكرم لخاد ةوطخلال يداحأ رواجتلا
- MPLS زكرم لخاد (ECMP) تاراسملا ةددعتم ةفلكتلا ةيواستم رواجتلا تاي لمع
- سايقملا تالكشمل TCAM مادختسا نم ققحتلا ةيفيك

MPLS زاغ لكل تاي ماستلاو تائدابلا نم ققحتلا وييرانيس لك يطغيو

تاحل طصم

MPLS	ليوتح ةيمستلا ددعتم تالوكوتوربال	رورم ةكرح ةرادا تاردقو عادال جمدت عادال ةقئاف مزح هيجوت ةداع ةينقت م (2 ةقبطلا) تانايبال طابترا ةقبط نم ليديتلاب ةصاخلا تانايبال قبطلا) ةكبشلا ةقبط نم هيجوتلل عادالو ةنورملاو عسوتلا ةيلباق
PE	رفوملا ةفاح (هجوملا/لوحملال)	C لمع نم IP تائداب يقلتت يتلا رفوملا ةكبش صاخلا ةفاحلا زاغ MPLS ةباحس يلا اهررمتو
CE	لي ماعلا ةفاح (هجوملا/لوحملال)	IP/MPLS ةكبش لرفوملا ةفاح هجومب لصتم لي ماعلا لمع نكاما ي ف زاغ ةمدخلال رفومل
LDP	لوكوتورب فاشتكا ةيمستلا	نيب ايئاقلت اهلدابتو تاي ماستلا عاشن يلع لمعي لوكوتورب وه LDP اي لجم هب ةصاخلا تائدابلل تاي ماست عاشن اب هجوم لك موقبي. تاهجوملا هناريجل ةيمستلا ميق نع نلعي
اسيل	راسم فيفص ةيمستلا لوحم	يجزومن L3VPN ي ف. ةنيعم MPLS هجو يلا لوصولل تاي ماستلا ةومجم ي دل ف، TE قفن كانه ناك اذا. ةقابط IGP + VPN يقلتت عي طتسي تان 6 يلا لصي ام Catalyst 9000 م عدي نأ نكمي. IGP + VPN + ةيمستلا LSPA مس تاي ماستلا نم فيفصلا اذه يلع قلطيو، تاي ماست
فرعم سدكم ةيمستلا	سدكم فرعم ةيمستلا	(LLOWS LSPA) ةكراشم (a) تاي ماست سدكم فيرعتل ديرف سره ف ج
ةيمست	ةيمست	م نم ةددعتم تاي ماست مزر نوكتي. ثحبلل ةمدختسملا MPLS ةيمست تاي ماست.
فرعم ةئدابلا	ةئدابلا فرعم	تافرعم نم ددع كانه) ةئداب لكل ماع دروم عاشن اب Catalyst 9000 موقبي (ةئداب لك ةيمست صي صخت ةلاح ي ف تاراسملا ددع يواسي تائدابلا فيضملا، فيضملا راسم) 1:1 ل اقباطم نوكي ةئزجتلا ةركاذ ي ف لاد
ما	مات قباطات	


		(ةرشابم لصتم ل)
LPM	قباطات لوطاً ةئدابلل	EM) عون يه اراسم (/32) لقاً وأ /31 نوئي راسم ي
ماك يت	ةثلاث ةركاذ ةلباق هيجوتلل يوتحملل	تالخدم ةثالثب تالخالإال تامالعتساو نيختب موقوي ةركاذلا نم عون يتل تالخالإال ي ةركاذلا نم عونلا اذه مادختسا بجي x و 1 و 0: ةفلتخم نوكت نلو، لخالإال س فنل ةددعتم تاقباطات كانه نوئي نأ اهيف نكمي >" ةميق وأ اعانق لودجلا اذه نمضتي. ةديرف لخالإال لكل ةجتانللا ةئجتلا لخالإال اذه قباطي ال وأ لخالإال اذه قباطي ناك اذا ام ةفرعمب هل حمست
ةب دح	ةلباق ةركاذ هيجوتلل يوتحملل	ةزهجالا (TCAM/ةئجتلا) ةزهجالا ةركاذل ماع حلطصم
علض	تامولعم ةدعاق هيجوتلا	"show ip route" ي هتدهاشم تمت يذل هيجوتلا لودج
ابت	تامولعم ةدعاق هيجوتلا ةداع	لإل رشؤم عم ARP و RIB لودج ةطساوب ةفاضم تائداب عم طسبم لودج ADJ
لصتم ةرشابم	لصتم قي رط ةرشابم	(ةرواجتم ARP) ايلحم ةلصتم فيضم ةئداب
لصتم ريغ لكش ب رشابم	راسم لصتم ريغ لكش ب رشابم	هليل لوصولل ةمداق ةيئان ةطقن ربع رمي قي رط
جدا	(لودج) رواجت	مزحلال ةباتك ةداعإل ةمدختسملا ةيئالاتلا ةوطخل تامولعم نيخت
ما	مات قباطات ةثلاث ةركاذ	نشابم ريغ /32 ةفيضملا ةزهجالا تائداب، ةلصتملا ةفيضملا ةزهجالا
ماك يت	ةلباق هيجوتلل يوتحملل	رصقألا وأ /31 ةرشابملا ريغ تائدابلا
امت عم طأ	جم انرب كحملا ليغشت ي مامال Forward	(ةزهجالا) ASIC ةقبط كحملا ليغشت
ف-نام فإ	Manager - ةداع يوتسم هيجوتلا	أ اهفدحت وأ FED تامولعم فيضت يتللا جماربل تانئاك FMAN-FP ريدي اهل يدعت
يس	ةطحم رشؤم	(سرهللا ةباتك ةداعإ = RI) ةمزحلال ةباتك ةداعإ تامولعم = ةطحم رشؤم (ةهجالا سرهف = DI) ةرداصللا ةهجالا تامولعم و
RI	ةباتك ةداع سرهللا	طخال رواجت يلا 3 ةقبطلا هيجوت ةداعإل MAC ناونع ةباتك ةداعإ تامولعم ةيئالاتلا
يآ يد	ةهجالا سرهف	ةرداصللا ةهجالا يلا ريشي يذل سرهللا

ققحتلا ونيوكتلا

MPLS بلق ي ةدحاولا ةوطخل رواجت عم L3VPN 1. ويراني سللا

ةيعجرم ايجولوبوط

ي Catalyst 9500 و PE ةزهجالا Catalyst 9300 switches تالوحملا لمعت، لاثملا اذه ضارغلأ
CE. ةزهجالا Catalyst 3850 تالوحم لمعت و P، زاك Stackwise ةيرهاظلا ةفيظولا

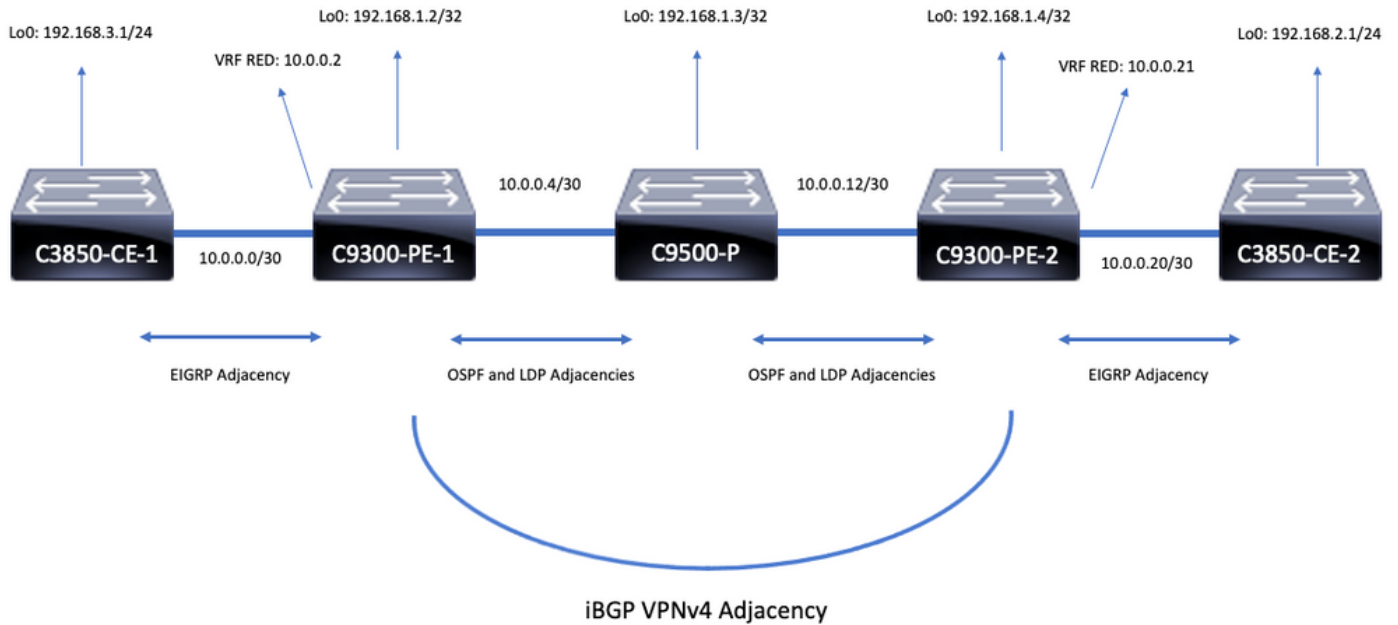

نېوكت لالې صافات

نېوكت C3850-CE-1

```
hostname C3850-CE-1
!
interface Loopback0
ip address 192.168.3.1 255.255.255.0
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.1 255.255.255.252
!
router eigrp 420
network 10.0.0.0 0.0.0.3
network 192.168.3.0 0.0.0.255
eigrp stub connected summary
!
ip route 0.0.0.0 0.0.0.0 10.0.0.2
```

نېوكت C9300-PE-1

```
hostname C9300-PE-1
!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.2 255.255.255.255
!
interface GigabitEthernet1/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.2 255.255.255.252
!
```

```
interface GigabitEthernet1/0/2
no switchport
ip address 10.0.0.5 255.255.255.252
!
router eigrp 420
!
address-family ipv4 vrf RED
network 10.0.0.0 0.0.0.3
autonomous-system 420
exit-address-family
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.4 remote-as 69420
neighbor 192.168.1.4 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.4 activate
neighbor 192.168.1.4 send-community extended
exit-address-family
!
address-family ipv4 vrf RED
redistribute eigrp 420
exit-address-family
```

نيوكت C9500-P

```
hostname C9500-P
!
interface Loopback0
ip address 192.168.1.3 255.255.255.255
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.6 255.255.255.252
!
interface TenGigabitEthernet1/0/2
no switchport
ip address 10.0.0.13 255.255.255.252
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
```

نيوكت C9300-CE-2

```
hostname C9300-PE-2
!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.4 255.255.255.255
!
```

```

interface GigabitEthernet2/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.21 255.255.255.252
!
interface GigabitEthernet2/0/2
no switchport
ip address 10.0.0.14 255.255.255.252
!
router eigrp 400
!
address-family ipv4 vrf RED
network 10.0.0.20 0.0.0.3
autonomous-system 400
exit-address-family
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.2 remote-as 69420
neighbor 192.168.1.2 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.2 activate
neighbor 192.168.1.2 send-community extended
exit-address-family
!
address-family ipv4 vrf RED
redistribute eigrp 400
exit-address-family

```

نيوكت C3850-CE-2

```

hostname C3850-CE-2
!
interface Loopback0
ip address 192.168.2.1 255.255.255.0
!
interface TenGigabitEthernet2/0/1
no switchport
ip address 10.0.0.22 255.255.255.252
!
router eigrp 400
network 10.0.0.20 0.0.0.3
network 192.168.2.0 0.0.0.255
eigrp stub connected summary
!
ip route 0.0.0.0 0.0.0.0 10.0.0.21

```

ي اساس ال ق قحت ال

اهنم ق قحت ال ب جي ة ي اساس ا تاب ل ط تم ك انه ، MPLS ة ح م ر ب ة ح ص نم ق قحت ال ل ب ق :

- دو جوم PE لى ال PE ل اص ت ا ة ح ص نم ق قحت ال
- PEs ن ي ب (LSP) ة ي م س ت ل ل ل و ح م ال ر ا س م ال ة ح ص نم ق قحت ال
- PEs ن ي ب BGPv4 ر و ا ج ت نم ق قحت ال
- LDP و VPNv4 ت ا ي م س ت ة ح ص نم ق قحت ال
- MPLS م ه ي ج و ت ة د ا ع ا ل و د ج ة ح ص نم ق قحت ال

PE إلى PE لاصتا نم ققحتلا

دكؤي ال اذه نكلو، يلحمل اعجرتسال نم ردصملاو ديعلبلا PE اعجرتسال لاصتا رابتخا كنكمي اعجرتسال IP نيوانع نع نالعالا متي هنال ارطن، ديچ (LSP) MPLS ةمالعل لوحملا راسملا نأ يلفسلا عزجلا يف.

ةصاخلا Loopback0 تاهجاو لالخ نم PE to PE MP-BGP VPNv4 رواجت قيقحت متي: **ةظالم** اهب.

```
C9300-PE-1#ping 192.168.1.4 source 192.168.1.2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.1.4, timeout is 2 seconds:
Packet sent with a source address of 192.168.1.2
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms C9300-PE-1#show ip route
192.168.1.4
Routing entry for 192.168.1.4/32
Known via "ospf 420", distance 110, metric 3, type intra area
Last update from 10.0.0.10 on GigabitEthernet1/0/3, 00:55:58 ago
Routing Descriptor Blocks:
* 10.0.0.6, from 192.168.1.4, 00:55:58 ago, via GigabitEthernet1/0/2
Route metric is 3, traffic share count is 1
```

LSP ةحص نم ققحتلا

تاي مست عي مجو LSP نم ققحتلل PE loopback إلى PE MPLS traceroute مادختسا كنكمي راسملا لعل MPLS LDP.

ال اذهو، LDP ةي مست، ةدحاو ةي مست يوس اذه MPLS traceroute ل ح ضر في ال: **ةظالم** مادختساب اه ضر في متي رورملا ةكرح نأ شيح، ةحجان CE نم رورملا ةكرح نأ تبثي (ةي جراخلا) LDP ةقصلملاو (ةي لخادلا) VPNv4 ةقصلملاو، ني قصلم.

```
C9300-PE-1#traceroute mpls ipv4 192.168.1.4/32 source 192.168.1.2
Tracing MPLS Label Switched Path to 192.168.1.4/32, timeout is 2 seconds

Codes: '.' - success, 'Q' - request not sent, '.' - timeout,
'L' - labeled output interface, 'B' - unlabeled output interface,
'D' - DS Map mismatch, 'F' - no FEC mapping, 'f' - FEC mismatch,
'M' - malformed request, 'm' - unsupported tlvs, 'N' - no label entry,
'P' - no rx intf label prot, 'p' - premature termination of LSP,
'R' - transit router, 'I' - unknown upstream index,
'l' - Label switched with FEC change, 'd' - see DDMAP for return code,
'X' - unknown return code, 'x' - return code 0

Type escape sequence to abort.
 0 10.0.0.5 MRU 1500 [Labels: 17 Exp: 0]
L 1 10.0.0.6 MRU 1500 [Labels: explicit-null Exp: 0] 8 ms
! 2 10.0.0.14 2 ms
```

حجان VPNv4 دوجو راهظا ديرتو CE فلخ زاهج وأ CE إلى لوصولا قح كي دل نكي مل اذا CE هجاوت يتلا ةهجاول نم لاصتالا رابتخا ةل واهم كنكمي LDP ربع تامالعل ري صم/ضر فيو ديعلبلا PE لعل VRF يف CE هجاوت يتلا يخال ةهجاولا إلى PE لعل VRF يف.

```
C9300-PE-1#ping vrf RED 10.0.0.21 source 10.0.0.2
```


Type escape sequence to abort.

Sending 5, 100-byte ICMP Echos to 10.0.0.21, timeout is 2 seconds:

Packet sent with a source address of 10.0.0.2

!!!!

Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/2 ms

PEs نيب BGP VPNv4 رواجت ةحص نم ققحتلا

```
C9300-PE-1#show bgp vpnv4 unicast all neighbors 192.168.1.4
```

```
BGP neighbor is 192.168.1.4, remote AS 69420, internal link
```

```
BGP version 4, remote router ID 192.168.1.4
```

```
BGP state = Established, up for 00:57:37
```

```
Last read 00:00:41, last write 00:00:41, hold time is 180, keepalive interval is 60 seconds
```

```
Neighbor sessions:
```

```
1 active, is not multisession capable (disabled)
```

```
Neighbor capabilities:
```

```
Route refresh: advertised and received(new)
```

```
Four-octets ASN Capability: advertised and received
```

```
Address family IPv4 Unicast: advertised and received
```

```
Address family VPNv4 Unicast: advertised and received
```

```
Enhanced Refresh Capability: advertised and received
```

```
Multisession Capability:
```

```
Stateful switchover support enabled: NO for session 1
```

```
Message statistics:
```

```
InQ depth is 0
```

```
OutQ depth is 0
```

```
Sent Rcvd
```

```
Opens: 1 1
```

```
Notifications: 0 0
```

```
Updates: 6 6
```

```
Keepalives: 62 63
```

```
Route Refresh: 0 0
```

```
Total: 69 70
```

```
Do log neighbor state changes (via global configuration)
```

```
Default minimum time between advertisement runs is 0 seconds
```

```
<snip>
```

```
C9300-PE-2#show bgp vpnv4 unicast all neighbors 192.168.1.2
```

```
BGP neighbor is 192.168.1.2, remote AS 69420, internal link
```

```
BGP version 4, remote router ID 192.168.1.2
```

```
BGP state = Established, up for 01:01:00
```

```
Last read 00:00:13, last write 00:00:37, hold time is 180, keepalive interval is 60 seconds
```

```
Neighbor sessions:
```

```
1 active, is not multisession capable (disabled)
```

```
Neighbor capabilities:
```

```
Route refresh: advertised and received(new)
```

```
Four-octets ASN Capability: advertised and received
```

```
Address family IPv4 Unicast: advertised and received
```

```
Address family VPNv4 Unicast: advertised and received
```

```
Enhanced Refresh Capability: advertised and received
```

```
Multisession Capability:
```

```
Stateful switchover support enabled: NO for session 1
```

```
Message statistics:
```

```
InQ depth is 0
```

```
OutQ depth is 0
```

```
Sent Rcvd
```

```
Opens: 1 1
```

```
Notifications: 0 0
```

```
Updates: 6 6
```

```
Keepalives: 67 66
```

Route Refresh: 0 0

Total: 74 73

Do log neighbor state changes (via global configuration)

Default minimum time between advertisement runs is 0 seconds

ةئداب ي ق ل ت م ت و ، د ع ب ن ع PE VPNv4 ر و ا ج ت ل ي غ ش ت م ت

C9300-PE-1#show bgp vpnv4 unicast all summary

BGP router identifier 192.168.1.2, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 16:19:10 Jun 1 2021 UTC (01:32:00.716 ago)

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
192.168.1.4	4	69420	108	108	7	0	0	01:34:52	2

C9300-PE-2#show bgp vpnv4 unicast all summary

BGP router identifier 192.168.1.4, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 16:18:31 Jun 1 2021 UTC (01:37:30.404 ago)

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
192.168.1.2	4	69420	114	114	7	0	0	01:40:22	2

ص ا خ VRF ي ف ت ا ئ د ا ب ل ل ت ل د ا ب ا م ت ق ق د

C9300-PE-1#show ip bgp vpnv4 vrf RED

BGP table version is 10, local router ID is 192.168.1.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
x best-external, a additional-path, c RIB-compressed,
t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*> 10.0.0.0/30	0.0.0.0	0		32768	?
*>i 10.0.0.20/30	192.168.1.4	0	100	0	?
*> 192.168.1.0	10.0.0.1	130816		32768	?
*>i 192.168.2.0	192.168.1.4	130816	100	0	?

C9300-PE-2#show ip bgp vpnv4 vrf RED

BGP table version is 9, local router ID is 192.168.1.4
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,

x best-external, a additional-path, c RIB-compressed,
t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*>i 10.0.0.0/30	192.168.1.2	0	100	0	?
*> 10.0.0.20/30	0.0.0.0	0		32768	?
*>i 192.168.1.0	192.168.1.2	130816	100	0	?
*> 192.168.2.0	10.0.0.22	130816		32768	?

VPNv4 و LDP: تاي م س ت ة ح ص ن م ق ق ح ت ل ا

VRF ل ا ي ف ت ا ئ د ا ب ل ا غ ل ب ي ن ا ت ل م ع ت س ا ن و ك ي ن ا ة ي م س ت VPNv4 ل ا ت ق ق د

C9300-PE-1#show ip bgp vpnv4 vrf RED labels

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	0.0.0.0	20/nolabel(RED)
10.0.0.20/30	192.168.1.4	nolabel/20
192.168.1.0	10.0.0.1	21/nolabel
192.168.2.1/32	192.168.1.4	nolabel/21 <-- VPNv4 label that is imposed to reach

192.168.2.0

C9300-PE-1#show ip route vrf RED 192.168.2.1

Routing Table: RED
Routing entry for 192.168.2.0/24
Known via "bgp 69420", distance 200, metric 130816, type internal
Last update from 192.168.1.4 01:31:56 ago
Routing Descriptor Blocks:
* 192.168.1.4 (default), from 192.168.1.4, 01:31:56 ago
Route metric is 130816, traffic share count is 1
AS Hops 0
MPLS label: 21 <-- VPNv4 label that matches the previous output
MPLS Flags: MPLS Required

C9300-PE-2#show ip bgp vpnv4 vrf RED labels

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	192.168.1.2	nolabel/20
10.0.0.20/30	0.0.0.0	20/nolabel(RED)
192.168.1.0	192.168.1.2	nolabel/21
192.168.2.0	10.0.0.22	21/nolabel <-- VPNv4 label that is advertised to reach

192.168.2.0

C9300-PE-2#show ip route vrf RED 192.168.2.1

Routing Table: RED
Routing entry for 192.168.2.0/24
Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal
Redistributing via eigrp 400, bgp 69420
Advertised by bgp 69420
Last update from 10.0.0.22 on GigabitEthernet2/0/1, 01:34:42 ago
Routing Descriptor Blocks:
* 10.0.0.22, from 10.0.0.22, 01:34:42 ago, via GigabitEthernet2/0/1 <-- CE-facing interface in
the VRF
Route metric is 130816, traffic share count is 1
Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit
Reliability 255/255, minimum MTU 1500 bytes
Loading 1/255, Hops 1

ةمدختسم ال LDP تاي مست نم ققحتال

```
C9300-PE-1#show mpls forwarding-table 192.168.1.4
```

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
19	17	192.168.1.4/32	0		Gi1/0/2	10.0.0.6 <-- 17 is the LDP label imposed to reach PE at 192.168.1.4 through Gi1/0/2

```
C9300-PE-2#show mpls forwarding-table 192.168.1.2
```

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
17	16	192.168.1.2/32	0		Gi2/0/2	10.0.0.13 <-- 16 is the LDP label imposed to reach PE at 192.168.1.4 through Gi2/0/2

مPLS هي جوت ةداع لودج ةحص نم ققحتال

```
C9300-PE-1#show mpls forwarding-table
```

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0		Gi1/0/2	10.0.0.6
17	Pop Label	10.0.0.16/30	0		Gi1/0/2	10.0.0.6
18	Pop Label	10.0.0.12/30	0		Gi1/0/2	10.0.0.6
19	17	192.168.1.4/32	0		Gi1/0/2	10.0.0.6
20	No Label	10.0.0.0/30[V]	1982		aggregate/RED	
21	No Label	192.168.3.0/24[V]	\		Gi1/0/1	10.0.0.1

```
C9300-PE-2#show mpls forwarding-table
```

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0		Gi2/0/2	10.0.0.13
	Pop Label	192.168.1.3/32	0		Gi2/0/3	10.0.0.17
17	16	192.168.1.2/32	164		Gi2/0/2	10.0.0.13
	16	192.168.1.2/32	1224		Gi2/0/3	10.0.0.17
18	Pop Label	10.0.0.4/30	0		Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.4/30	0		Gi2/0/3	10.0.0.17
20	No Label	10.0.0.20/30[V]	0		aggregate/RED	
21	No Label	192.168.2.0/24[V]	\		Gi2/0/1	10.0.0.22

ةئداب لك لى لوصول ةمدختسم ال (LDP) ةي جراخال او (VPNv4) ةي لخال تاي مستال دي كأت في ةني عم VRF

```
C9300-PE-1#show ip cef vrf RED 192.168.2.0/24 detail
```

```
192.168.2.1/32, epoch 0, flags [rib defined all labels]
  recursive via 192.168.1.4 label 21 <-- VPNv4 label
    nexthop 10.0.0.6 GigabitEthernet1/0/2 label 17-(local:19) <-- 17 is the LDP label that is be
imposed to reach the remote PE,
19 is the local LDP label advertised to the P router
```

```
C9300-PE-2#show ip cef vrf RED 192.168.3.0/24 detail
```

```
192.168.1.1/32, epoch 0, flags [rib defined all labels]
  recursive via 192.168.1.2 label 22 <-- VPNv4 label
    nexthop 10.0.0.13 GigabitEthernet2/0/2 label 16-(local:17) <-- 16 is the LDP label that is
be imposed to reach the remote PE,
17 is the local LDP label
```

```
advertised to the P router
```

تانئكال ري دم تاي ئاصح نم ققحتال

ةق لعم تانئاك دجوت ال ،ةيلاثم ل تاهويرانيس ل ي

```
C9300-PE-1#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

```
9500-P#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

```
C9300-PE-2#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
Total-objects: 482
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

ةدابل ةجر رب

MPLS، C9300-PE-1، C9500-P، و C9300-PE-2. تاهجوم ىل ع تائ دابل ةجر رب ي لال مس قل ي طغي

C9300-PE-1 تائ دابل ةجر رب

```
***Software Prefix Programming***
```

```
C9300-PE-1#show ip route vrf RED 192.168.2.1
```

```
Routing Table: RED
```

```
Routing entry for 192.168.2.0/24
```

```
Known via "bgp 69420", distance 200, metric 130816, type internal
```

```
Last update from 192.168.1.4 20:21:40 ago
```

```
Routing Descriptor Blocks:
```

* **192.168.1.4** (default), from 192.168.1.4, 20:21:40 ago <-- **Remote PE reachable in the global routing table**

Route metric is 130816, traffic share count is 1
AS Hops 0
MPLS label: **21** <-- **VPNv4 label**
MPLS Flags: MPLS Required

C9300-PE-1#**show ip route 192.168.1.4**

Routing entry for 192.168.1.4/32

Known via "ospf 420", distance 110, metric 3, type intra area

Last update from 10.0.0.6 on GigabitEthernet1/0/2, 21:27:11 ago

Routing Descriptor Blocks:

* **10.0.0.6**, from 192.168.1.4, 21:27:11 ago, via **GigabitEthernet1/0/2** <-- **Next-hop 10.0.0.6 via Gi1/0/2 to reach**

Route metric is 3, traffic share count is 1

*****FMAN RP Prefix Programming*****

C9300-PE-1#**show ip vrf detail**

VRF RED (**VRF Id = 2**); default RD 69:69; default VPNID <-- **VRF ID is important in subsequent command**

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi1/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

C9300-PE-1#**show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24** <-
- **Index value is the VRF ID from previous command**

Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_LABEL	0x14

C9300-PE-1#**show platform software mpls switch active r0 label index 0x14** <-- **Utilize the Index value from previous command**

Label OCE 0x14 -> OBJ_LABEL (**0x17**) <-- **Utilized in next command**

Flags: Real, Number of labels in the OCE: 1

Label values: 0x15

Backup flags: Pop, UHP, backup label 0x100001

OM handle: 0x3480636fb0

C9300-PE-1#**show platform software mpls switch active r0 label index 0x17** <-- **Utilize the OBJ_LABEL value from previous command**

Label OCE 0x17 -> OBJ_ADJACENCY (**0x46**) <-- **Utilized in next command**

Flags: Real, Number of labels in the OCE: 1

Label values: 0x11

Backup flags: Pop, UHP, backup label 0x100001

OM handle: 0x348062f858

C9300-PE-1#**show platform software adjacency switch active r0 index 0x46** <-- **Utilize the**

OBJ_ADJACENCY value from previous command

Number of adjacency objects: 6

Adjacency id: 0x46 (70)

Interface: **GigabitEthernet1/0/2**, IF index: 54, Link Type: MCP_LINK_TAG <-- **Egress interface**
Encap: **d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47** <-- **MAC ending in DDE4 is the DMAC, MAC ending in D1D6 is SMAC, 8847 is MPLS ETYPE**
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: **10.0.0.6** <-- **Next-hop IP address**
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480636280

*****FMAN FP Prefix Programming*****

C9300-PE-1#**show ip vrf detail**

VRF RED (**VRF Id = 2**); default RD 69:69; default VPNID <-- **VRF ID is important in subsequent command**

Old CLI format, supports IPv4 only
Flags: 0xC
Interfaces:
 Gil/0/1
Address family ipv4 unicast (Table ID = 0x2):
 Flags: 0x0
 Export VPN route-target communities
 RT:69:69
 Import VPN route-target communities
 RT:69:69
 No import route-map
 No global export route-map
 No export route-map
 VRF label distribution protocol: not configured
 VRF label allocation mode: per-prefix

C9300-PE-1#**show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24 detail** <-- **Index value is the VRF ID from previous command**

Forwarding Table

192.168.2.0/24 -> OBJ_LABEL (0x14), urpf: 15 <-- **Utilized in next command**
Prefix Flags: unknown
aom id: 648, HW handle: (nil) (created)

C9300-PE-1#**show platform software mpls switch active f0 label index 0x14** <-- **Utilize the OBJ_LABEL value from the previous command**

Label OCE 0x14 -> OBJ_LABEL (0x17) <-- **Utilized in next command**

Flags: Real, Number of labels in the OCE: 1
Label values: 0x15
Backup flags: Pop, UHP, backup label 0x100001
aom id: 647, CPP handle: 0xdeadbeef (created)

C9300-PE-1#**show platform software mpls switch active f0 label index 0x17** <-- **Utilize the OBJ_LABEL value from the previous command**

Label OCE 0x17 -> OBJ_ADJACENCY (0x46) <-- **Utilized in next command**

Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 664, CPP handle: 0xdeadbeef (created)

Handle:0x7feeeca12bb8 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-
ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7feeeca2af28
Features sharing this resource:Cookie length: 12
01 02 a8 c0 00 00 02 d0 07 00 00 00

Detailed Resource Information (ASIC# 0)

Number of HTM Entries: 1

Entry 0: (handle 0x7feeeca2af28)

Absolute Index: 66036

Time Stamp: 160003

KEY - vrf:2 mtr:0 **prefix:192.168.2.0** rcp_redirect_index:0x0

MASK - vrf:0 mtr:0 **prefix:0.0.0.255** rcp_redirect_index:0x0

FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5

afdLabelOrDestClientId:0 SI:182 destined_to_us:0 hw_stats_idx:0 stats_id:0

redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0x2

SRC-AD = learning_violation:0 need_to_learn:0 locally_connected:0 staticentryViolation:0

rpfValid:1 rpfLe:0 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:0

rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UseRpfmatchTable:0

rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,

sgtCacheControl0 = 0

port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0

group_label:0x0 group_mask:0x0

=====

**C9300-PE-1#show platform hardware fed switch active fwd-asic resource asic all destination-index
range 0x535f 0x535f <-- Utilize the di_id from the previous command**

ASIC#0:

index = 0x535f

pmap = 0x00000000 0x00000000

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0

copySeg = 0

ASIC#1:

index = 0x535f

pmap = 0x00000000 **0x00000002 <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000
0000 0000 0000 0010 = Port 1 (Zero based, count right to left)**

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0
stripSeg = 0
copySeg = 0

C9300-PE-1#show plat soft fed switch active ifm mappings

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
GigabitEthernet1/0/2	0x36	1	0	1	1	0	6	7	2	2	NIF	Y

- Port 1 is the egress port, Gi1/0/2

C9500-P تائىدابلا ةچمرب

Software Prefix Programming

C9500-P#show ip route 192.168.1.4

Routing entry for 192.168.1.4/32

Known via "ospf 420", distance 110, metric 2, type intra area

Last update from 10.0.0.14 on TenGigabitEthernet1/0/2, 1d21h ago

Routing Descriptor Blocks:

* 10.0.0.14, from 192.168.1.4, 1d21h ago, via TenGigabitEthernet1/0/2 <-- Next-hop to reach 192.168.1.4

Route metric is 2, traffic share count is 1

C9500-P#show ip cef 192.168.1.4 detail

192.168.1.4/32, epoch 4

dflt local label info: global/17 [0x3]

nexthop 10.0.0.14 TenGigabitEthernet1/0/2 label explicit-null-(local:17)

FMAN RP Prefix Programming

C9500-P#show platform software ip switch active r0 cef prefix 192.168.1.4/32

Forwarding Table

Prefix/Len	Next Object	Index
192.168.1.4/32	OBJ_LABEL	0x16 <-- Value used in next command

C9500-P#show platform software mpls switch active r0 label index 0x16 <-- Utilize the OBJ_LABEL value from previous command

Label OCE 0x16 -> OBJ_ADJACENCY (0x49) <-- Value used in next command

Flags: Real, Number of labels in the OCE: 1

Label values: 0

Backup flags: Pop, UHP, backup label 0x100001

OM handle: 0x34806492f0

C9500-P#show platform software adjacency switch active r0 index 0x49 <-- Utilize OBJ_ADJACENCY value from previous command

Number of adjacency objects: 8

Adjacency id: 0x49 (73)

Interface: TenGigabitEthernet1/0/2, IF index: 66, Link Type: MCP_LINK_TAG

Encap: 70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47 <-- MAC ending in AE71 is the DMAC, MAC ending in DDD6 is the SMAC, 8847 is MPLS ETYPE

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: unknown

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: 10.0.0.14 <-- Next-hop IP

IP FRR MCP_ADJ_IPFRR_NONE 0

OM handle: 0x3480647760

FMAN FP Prefix Programming

C9500-P#show platform software ip switch active f0 cef prefix 192.168.1.4/32 detail
Forwarding Table

192.168.1.4/32 -> OBJ_LABEL (0x16), urpf: 21 <-- Used in subsequent command
Prefix Flags: unknown
aom id: 567, HW handle: (nil) (created)

C9500-P#show platform software mpls switch active f0 label index 0x16 <-- Utilize the OBJ_LABEL
value from previous command

Label OCE 0x16 -> OBJ_ADJACENCY (0x49) <-- Used in subsequent command
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 589, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software adjacency switch active f0 index 0x49 <-- Utilize the
OBJ_ADJACENCY from previous command
Number of adjacency objects: 8

Adjacency id: 0x49 (73)
Interface: TenGigabitEthernet1/0/2, IF index: 66, Link Type: MCP_LINK_TAG
Encap: 70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47 <-- MAC ending in AE71 is the DMAC, MAC
ending in DDD6 is the SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.14 <-- Next-hop IP
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 535, HW handle: (nil) (created)

*** FED Prefix Programming***

C9500-P#show platform software fed switch active ip route 192.168.1.4/32

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
---	----	---	-----	---	----	-----	-----
0	192.168.1.4/32	0x7f790c4cf0e8	0x0	0	0		

2021/06/14 22:10:54.150 <-- HTM value significant for next command
FIB: prefix_hdl:0x6a000020, mpls_ecr_prefix_hdl:0
===== OCE chain =====
LABEL:objid:22 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local
transport label
flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xb9000037
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3103785015 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71 <-- Matches the next-hop
information to reach 192.168.1.4/32
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7f790c4cdfd8, ri_id:0x38 phdl:0x76000058, ref_cnt:1
si:0x7f790c4c22f8, si_id:0x400b, di_id:0x2 <-- di_id utilized in subsequent commands
ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x2d000027, }
=====
MPLS info: mpls_ecr_scale_prefix_adj:0, mpls_lspa_hdl:0
=====

C9500-P#show platform hardware fwd-asic abstraction print-resource-handle 0x7f790c4cf0e8 1 <--
Utilize the HTM value from previous command

Handle:0x7f790c4cf0e8 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-
ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f790c4cf2f8

Features sharing this resource:Cookie length: 12
04 01 a8 c0 00 00 00 d0 07 00 00 00

Detailed Resource Information (ASIC# 0)

Number of HTM Entries: 1

Entry 0: (handle 0x7f790c4cf2f8)

Absolute Index: 126650

Time Stamp: 40

KEY - vrf:0 mtr:0 **prefix:192.168.1.4** rcp_redirect_index:0x0

MASK - vrf:0 mtr:0 **prefix:0.0.0.0** rcp_redirect_index:0x0

FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5

afdLabelOrDestClientId:0 SI:16395 destined_to_us:0 hw_stats_idx:1 stats_id:0

redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0

SRC-AD = learning_violation:0 need_to_learn:0 locally_connected:0 staticentryViolation:0

rpfValid:1 rpfLe:38 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1

rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UseRpfmatchTable:0

rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,

sgtCacheControl0 = 0

port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0

group_label:0x0 group_mask:0x0

=====

C9500-P#show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x2 0x2 <-- Utilize the di_id value from the previous command

ASIC#0:

index = 0x2

pmap = 0x00000000 0x00000000

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0

copySeg = 0

ASIC#1:

index = 0x2

pmap = 0x00000000 **0x00000002 <-- 0x00000002 in binary is 0000 0000 0000 0000 0000 0000 0000 =**

Port 1 (Zero based, count right to left)

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0

copySeg = 0

C9500-P#show platform software fed switch active ifm mappings

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
TenGigabitEthernet1/0/2	0x42	1	0	1	1	0	10	1	2	2	NIF	Y

- Port 1 is the egress port, TenGig1/0/2

C9300-PE-2 تائ دابل اة چ م ر ب

Software Prefix Programming

C9300-PE-2#show ip route vrf RED 192.168.2.1

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Last update from 10.0.0.22 on GigabitEthernet2/0/1, 1d21h ago

Routing Descriptor Blocks:

* **10.0.0.22**, from 10.0.0.22, 1d21h ago, via GigabitEthernet2/0/1 <-- **Next-hop reachable in the VRF**

Route metric is 130816, traffic share count is 1

Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit

Reliability 255/255, minimum MTU 1500 bytes

Loading 1/255, Hops 1

C9300-PE-2#show ip route vrf RED 10.0.0.22

Routing Table: RED

Routing entry for 10.0.0.20/30

Known via "connected", distance 0, metric 0 (connected, via interface)

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Routing Descriptor Blocks:

* **directly connected**, via GigabitEthernet2/0/1 <-- **Next-hop directly connected**

Route metric is 0, traffic share count is 1

C9300-PE-2#show ip cef vrf RED 192.168.2.0/24 detail

192.168.2.0/24, epoch 0

QOS: Precedence routine (0)

dfilt local label info: other/21 [0x2]

nexthop 10.0.0.22 GigabitEthernet2/0/1

FMAN RP Prefix Programming

C9300-PE-2#show ip vrf detail

VRF RED (VRF Id = 2); default RD 69:69; default VPNID <-- VRF ID is important in subsequent command

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi2/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

C9300-PE-2#show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24
Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_ADJACENCY	0x19

C9300-PE-2#show platform software adjacency switch active r0 index 0x19 <-- Utilize the Index value from previous command

Number of adjacency objects: 6

Adjacency id: 0x19 (25)

Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP

Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0 <-- MAC ending in C9C2 is DMAC, MAC ending in AE42 is SMAC, 0x800 is the IP ETYPE

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: no-l3-inject

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: 10.0.0.22

IP FRR MCP_ADJ_IPFRR_NONE 0

OM handle: 0x348062f118

FMAN FP Prefix Programming

C9300-PE-2#show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24
detail

Forwarding Table

192.168.2.0/24 -> OBJ_ADJACENCY (0x19), urpf: 30 <-- Utilized in next command

Prefix Flags: unknown

aom id: 665, HW handle: (nil) (created)

QPPB precedence: 0

C9300-PE-2#show platform software adjacency switch active f0 index 0x19 <-- Utilize the OBJ_ADJACENCY from previous command

Number of adjacency objects: 6

Adjacency id: 0x19 (25)

Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP

Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: no-l3-inject

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: 10.0.0.22

IP FRR MCP_ADJ_IPFRR_NONE 0

aom id: 659, HW handle: (nil) (created)

FED Prefix Programming

C9300-PE-2#show platform software fed switch active ip route vrf-name RED 192.168.2.0/24

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
-----	------	-----	-------	-----	------	------	-------

---	----	---	-----	---	----	-----	-----
-----	------	-----	-------	-----	------	-------	-------

2	192.168.2.0/24	0x7f7fb4a25648	0x0	0	0		
---	----------------	----------------	-----	---	---	--	--

2021/06/14 17:04:13.460 <-- HTM value significant for next command

FIB: prefix_hdl:0x6e00002a, mpls_ecr_prefix_hdl:0

=====
OCE chain

ADJ:objid:25 {link_type:IP ifnum:0x35, si:0x3300003e, IPv4: 10.0.0.22 }

=====
MPLS info: mpls_ecr_scale_prefix_adj:0, mpls_lspa_hdl:0

=====

C9300-PE-2#show platform hardware fed switch active fwd-asic abstraction print-resource-handle 0x7f7fb4a25648 1 <-- Utilize HTM value from previous command

Handle:0x7f7fb4a25648 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f7fb4a10e58
Features sharing this resource:Cookie length: 12
01 02 a8 c0 00 00 02 d0 07 00 00 00

Detailed Resource Information (ASIC# 0)

Number of HTM Entries: 1

Entry 0: (handle 0x7f7fb4a10e58)

Absolute Index: 66036

Time Stamp: 164911

KEY - vrf:2 mtr:0 prefix:192.168.2.0 rcp_redirect_index:0x0

MASK - vrf:0 mtr:0 prefix:0.0.0.255 rcp_redirect_index:0x0

FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5
afdLabelOrDestClientId:0 SI:182 destined_to_us:0 hw_stats_idx:1 stats_id:0

redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0

SRC-AD = learning_violation:0 need_to_learn:0 locally_connected:0 staticentryViolation:0

rpfValid:1 rpfLe:37 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1

rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UseRpfmatchTable:0

rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,
sgtCacheControl0 = 0

port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0

group_label:0x0 group_mask:0x0

=====

C9300-PE-2#show platform software fed switch active ip adj

IPV4 Adj entries

Table with 6 columns: dest, if_name, dst_mac, si_hdl, ri_hdl, pd_flags. Row 1: 10.0.0.22, GigabitEthernet2/0/1, 0072.78c8.c9c2, 0x7f7fb4a44048, 0x7f7fb4b089d8, 0x0. Row 2: 0x19, 2021/06/14 16:59:43.447, <-- si_hdl used in next command

C9300-PE-2#show platform hardware fed switch active fwd-asic abstraction print-resource-handle 0x7f7fb4a44048 1 <-- Utilize the si_hdl value from previous command

Handle:0x7f7fb4a44048 Res-Type:ASIC_RSC_SI Res-Switch-Num:255 Asic-Num:255 Feature-ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1

priv_ri/priv_si Handle: 0x7f7fb4b089d8Hardware Indices/Handles: index0:0xb6

mtu_index/l3u_ri_index0:0x0 index1:0xb6 mtu_index/l3u_ri_index1:0x0

Features sharing this resource:66 (1)]

Cookie length: 56

00 00 00 00 00 00 00 00 25 00 00 00 00 00 00 00 00 00 00 00 08 00 00 72 78 c8 c9 c2 00 00 00 00
00 00

Detailed Resource Information (ASIC# 0)

Station Index (SI) [0xb6]

RI = 0x2b

DI = 0x5338

stationTableGenericLabel = 0

stationFdConstructionLabel = 0x7

lookupSkipIdIndex = 0
rcpServiceId = 0
dejaVuPreCheckEn = 0
Replication Bitmap: CD

Detailed Resource Information (ASIC# 1)

Station Index (SI) [0xb6]
RI = 0x2b
DI = **0x5338**
stationTableGenericLabel = 0
stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0
rcpServiceId = 0
dejaVuPreCheckEn = 0
Replication Bitmap: LD

=====
C9300-PE-2#show platform hardware fed switch active fwd-asic resource asic all destination-index
range 0x5338 0x5338 <-- Utilize the DI value from previous command
ASIC#0:

index = 0x5338
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

index = 0x5338
pmap = 0x00000000 **0x00000001** <-- **0x00000001 in binary is 0000 0000 0000 0000 0000 0000 0000 0001**
= Port 0 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

C9300-PE-2#show platform software fed switch active ifm map
Interface IF_ID Inst Asic Core Port SubPort Mac Cntx LPN GPN Type Active
GigabitEthernet2/0/1 0x35 1 0 1 **0** 0 26 6 1 97 NIF Y <-
- Port 0 is the egress port, Gi2/0/1

VPNv4 تاي مست ةج مررب

VPNv4 تاي مست ةج مررب ي ل ل ات ال مس ق ل ا ي ط غ ي MPLS PE، C9300-PE-1 و C9300-PE-2. نم ج ا ر خ ا د ج و ي ال ي ل ات ال و VPNv4 ة ي مست ي ل ع ه ي ج و ت ال ة د ا ع ا ب C9500 م و ق ي ال .

C9300-PE-1 VPNv4 تاي مست ةج مررب:

ة د ي ع ب ال ة ئ د ا ب ال س ي ل و PE، ال ة ي ل ح م ال ة ئ د ا ب ال ن م ق ق ح ت .

Software VPNv4 Label Programming

```
C9300-PE-1#show ip cef vrf RED 192.168.3.0/24 detail
```

```
192.168.3.0/24, epoch 0
```

```
QOS: Precedence routine (0)
```

```
dfllt local label info: other/22 [0x2] <-- VPNv4 label associated with the local prefix
```

```
nexthop 10.0.0.1 GigabitEthernet1/0/1
```

FMAN RP VPNv4 Label Programming

```
C9300-PE-1#show platform software mpls switch active r0 eos index 24 <-- Utilize the objid from the FED command
```

```
EOS Choice 0x18, Number of paths: 2
```

```
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
```

```
Next Object Index: 0,0x17
```

```
OM handle: 0x3480631760
```

FMAN FP VPNv4 Label Programming

```
C9300-PE-1#show platform software mpls switch active f0 eos index 24 <-- Utilize the objid from the FED command
```

```
EOS Choice 0x18, Number of paths: 2
```

```
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
```

```
Next Object Index: 0,0x17
```

```
aom id: 5748, CPP handle: 0xdeadbeef (created), flags: 0 <-- Utilized in subsequent command
```

```
C9300-PE-1#show platform software object-manager switch active f0 object 5748 <-- Utilize the aom id from previous command
```

```
Object identifier: 5748
```

```
Description: EOS Choice 0x18
```

```
Status: Done, Epoch: 0, Client data: 0x63150908
```

```
C9300-PE-1#show platform software object-manager switch active f0 object 5748 parents <-- Utilize the aom id
```

```
Object identifier: 7
```

```
Description: Special Object adj_drop
```

```
Status: Done
```

```
Object identifier: 5746
```

```
Description: label 0x17
```

```
Status: Done
```

FED VPNv4 Label Programming

```
C9300-PE-1#show platform software fed switch active mpls forwarding label 22 detail
```

```
LENTY:label:22 nobj:(EOS, 24) lentry_hdl:0x800000a
```

```
modify_cnt:1 backwalk_cnt:0
```

```
lspa_handle:0
```

```
AAL: id:134217738 lbl:22
```

```
eos0:[adj_hdl:0, hw_hdl:0x7fa4c4d72e08]
```

```

eos1:[adj_hdl:0x6e00003e, hw_hdl:0x7fa4c4d72c58]
deagg_vrf_id = 0 lspc_handle:0
EOS:objid:24 local_label:0 flags:0:( ) pdfflags:0 <-- Utilized in previous commands
nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 23) modify:0 bwalk:0
LABEL:objid:23 link_type:IP local_label:22 outlabel:(1048577, 0)
flags:0xc:(UHP,POP,) pdfflags:0x2:(INSTALL_HW_OK,) adj_handle:0x6e00003e
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:1845493822 lbl:0 smac:a0f8.4911.d1e4 dmac:0072.78c8.06e4
sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)
vlan_id:0 vrf_id:0 ri:0x7fa4c4a81af8, ri_id:0x44 phdl:0xf1000024, ref_cnt:1
si:0x7fa4c4d83da8, si_id:0x4012, di_id:0x5338
ADJ:objid:113 {link_type:IP ifnum:0x35, si:0x2000003a, IPv4: 10.0.0.1 }

```

إعدادات C9300-PE-2 VPNv4:

إعدادات PE، لإعدادات VPNv4

Software VPNv4 Label Programming

```

C9300-PE-2#show ip cef vrf RED 192.168.2.0/24 detail
192.168.2.0/24, epoch 0
QOS: Precedence routine (0)
dflt local label info: other/21 [0x2] <-- VPNv4 label associated with local prefix
nexthop 10.0.0.22 GigabitEthernet2/0/1

```

*** FMAN RP VPNv4 Label Programming***

```

C9300-PE-2#show platform software mpls switch active r0 eos index 61 <-- Use the objid from the
FED command

```

```

EOS Choice 0x3d, Number of paths: 2
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
Next Object Index: 0,0x3b
OM handle: 0x348063f2f8

```

*** FMAN FP VPNv4 Label Programming***

```

C9300-PE-2#show platform software mpls switch active f0 eos index 61 <-- Use the objid from the
FED command

```

```

EOS Choice 0x3d, Number of paths: 2
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
Next Object Index: 0,0x3b
aom id: 3541, CPP handle: 0xdeadbeef (created), flags: 0 <-- Utilized in subsequent command

```

```

C9300-PE-2#show platform software object-manager switch active f0 object 3541 <-- Use the aom id
from previous command

```

```

Object identifier: 3541
Description: EOS Choice 0x3d
Status: Done, Epoch: 0, Client data: 0x11079188

```

```

C9300-PE-2#show platform software object-manager switch active f0 object 3541 parents <-- Use
the aom id from previous command

```

```

Object identifier: 7
Description: Special Object adj_drop
Status: Done

```

```

Object identifier: 3540
Description: label 0x3b
Status: Done

```


FMAN FP LDP Label Programming

C9300-PE-1#show platform software mpls switch active f0 label index 59

Label OCE 0x3b -> OBJ_ADJACENCY (0x46)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 7065, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software object-manager switch active f0 object 7065

Object identifier: 7065
Description: label 0x3b
Status: Done, Epoch: 0, Client data: 0x63152218

C9300-PE-1#show platform software object-manager switch active f0 object 7065 parents

Object identifier: 511
Description: adj 0x46, Flags None
Status: Done

FED LDP Label Programming

C9300-PE-1#show platform software fed switch active mpls forwarding label 19 detail

LENTRY:label:19 nobj:(LABEL, 59) lentry_hdl:0xef000007
modify_cnt:7 backwalk_cnt:0
lspa_handle:0
AAL: id:4009754631 lbl:19
eos0:[adj_hdl:0x91000056, hw_hdl:0x7fa4c4d6cae8]
eos1:[adj_hdl:0x91000056, hw_hdl:0x7fa4c4d6c8e8]
deagg_vrf_id = 0 lspa_handle:0
LABEL:objid:59 link_type:MPLS local_label:19 outlabel:(17, 0)
flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x91000056
unsupported_recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:2432696406 lbl:0 smac:a0f8.4911.d1d6 dmac:d4ad.71b5.dde4
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7fa4c4d75fa8, ri_id:0x26 phdl:0x9f00004b, ref_cnt:1
si:0x7fa4c4d5f6c8, si_id:0x4013, di_id:0x535f
ADJ:objid:70 {link_type:MPLS ifnum:0x36, si:0x25000021, }

LDP C9500: تايمستة مجرب

نم ققحت الو، دي ب ال PE ل اهنع نال عال متي يتي لة ل حم ال LDP ةي مست ة حص نم ققحت ال
و FMAN RP ال عجار م FED روظنم نم ة قاطب ال نم ققحت. ة دي ب ال LDP ةي مست ة حص
FMAN FP.

Software LDP Label Programming

C9500-P#show mpls forwarding-table

Table with 6 columns: Local, Outgoing, Prefix, Bytes Label, Outgoing, Next Hop. It shows two entries for LDP labels 16 and 17, both advertised to reach PE 192.168.1.2 and 192.168.1.4 respectively.

FMAN RP LDP Label Programming

C9500-P#show platform software mpls switch active r0 label index 23 <-- Use the obj id from the FED command

Label OCE 0x17 -> OBJ_ADJACENCY (0x3f)

Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480645150

*****FMAN FP LDP Label Programming*****

C9500-P#show platform software mpls switch active f0 label index 23 <-- Use the obj id from the FED command

Label OCE 0x17 -> OBJ_ADJACENCY (0x3f)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 654, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software object-manager switch active f0 object 654 <-- Use the aom id from the previous command

Object identifier: 654
Description: label 0x17
Status: Done, Epoch: 0, Client data: 0x4b41c08

C9500-P#show platform software object-manager switch active f0 object 654 parents <-- Use the aom id from the previous command

Object identifier: 515
Description: adj 0x3f, Flags None
Status: Done

*****FED LDP Label Programming*****

C9500-P#show platform software fed switch active mpls forwarding label 16 detail

LENTRY:label:16 nobj:(LABEL, 23) lentry_hdl:0xec000004
modify_cnt:6 backwalk_cnt:0
lspa_handle:0
AAL: id:3959422980 lbl:16
eos0:[adj_hdl:0xc3000055, hw_hdl:0x7f28944be3c8]
eos1:[adj_hdl:0xc3000055, hw_hdl:0x7f28944be1b8]
deagg_vrf_id = 0 lspa_handle:0
LABEL:objid:23 link_type:MPLS local_label:16 outlabel:(0, 0) <-- Utilized in previous commands
flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xc3000055
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3271557205 lbl:0 smac:d4ad.71b5.dde4 dmac:a0f8.4911.d1d6
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7f289449bf88, ri_id:0x44 phdl:0xe9000057, ref_cnt:1
si:0x7f2894489b58, si_id:0x4009, di_id:0x1
ADJ:objid:63 {link_type:MPLS ifnum:0x41, si:0x57000023, }

*****Software LDP Label Programming*****

C9500-P#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	explicit-n	192.168.1.2/32	23409	Tel/0/1	10.0.0.5
17	explicit-n	192.168.1.4/32	23345	Tel/0/2	10.0.0.14

*****FMAN RP LDP Label Programming*****

C9500-P#show platform software mpls switch active r0 label index 64 <-- Use the obj id from the FED command

Label OCE 0x40 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001

OM handle: 0x3480641d08

FMAN FP LDP Label Programming

C9500-P#show platform software mpls switch active f0 label index 64 <-- Use the obj id from the FED command

Label OCE 0x40 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 657, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software object-manager switch active f0 object 657 <-- Use the aom id value from previous command

Object identifier: 657
Description: label 0x40
Status: Done, Epoch: 0, Client data: 0x4b523f8

C9500-P#show platform software object-manager switch active f0 object 657 parents<-- Use the aom id value from previous command

Object identifier: 535
Description: adj 0x49, Flags None
Status: Done

FED LDP Label Programming

C9500-P#show platform software fed switch active mpls forwarding label 17 detail

LENTRY:label:17 nobj:(LABEL, 64) lentry_hdl:0x8d000005
modify_cnt:6 backwalk_cnt:0
lspa_handle:0
AAL: id:2365587461 lbl:17
eos0:[adj_hdl:0xcc000037, hw_hdl:0x7f2894480438]
eos1:[adj_hdl:0xcc000037, hw_hdl:0x7f2894480228]
deagg_vrf_id = 0 lspa_handle:0
LABEL:objid:64 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Utilized in previous commands
flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xcc000037
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3422552119 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7f2894498008, ri_id:0x38 phdl:0x76000058, ref_cnt:1
si:0x7f2894498478, si_id:0x400b, di_id:0x2
ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x3d000027, }

C9300-PE-2 LDP: تايمست ةجرمرب

نم ققحت الو، دي ب ل PE ل اهنع نال عال م تي يت ل ا ل حم ل LDP ةي م ست ة حص نم ققحت ل و FMAN RP و ل ع ج ا ر م ث FED روظنم نم ة قاط ب ل ل نم ققحت . ة دي ب ل LDP ةي م ست ة حص FMAN FP.

Software LDP Label Programming

C9300-PE-2#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0	Gi2/0/2	10.0.0.13
17	16	192.168.1.2/32	630	Gi2/0/2	10.0.0.13 <-- LDP label 17 is advertised to Remote PE 192.168.1.2
18	Pop Label	10.0.0.4/30	0	Gi2/0/2	10.0.0.13

```

20          No Label    10.0.0.20/30[V]  1260          aggregate/RED
21          No Label    192.168.2.0/24[V]  \
                                     2070          Gi2/0/1      10.0.0.22

```

C9300-PE-2#show platform software mpls switch active r0 label index 82 <-- Utilize the obj id value from the FED Command

```

Label OCE 0x52 -> OBJ_ADJACENCY (0x46)
  Flags: Real, Number of labels in the OCE: 1
  Label values: 0x10
  Backup flags: Pop, UHP, backup label 0x100001
  OM handle: 0x348063ad00

```

C9300-PE-2#show platform software mpls switch active f0 label index 82 <-- Utilize the obj id value from the FED Command

```

Label OCE 0x52 -> OBJ_ADJACENCY (0x46)
  Flags: Real, Number of labels in the OCE: 1
  Label values: 0x10
  Backup flags: Pop, UHP, backup label 0x100001
  aom id: 3624, CPP handle: 0xdeadbeef (created) <-- Used in next commands

```

C9300-PE-2#show platform software object-manager switch active f0 object 3624 <-- Utilize the aom id value

```

Object identifier: 3624
  Description: label 0x52
  Status: Done, Epoch: 0, Client data: 0x11071668

```

C9300-PE-2#show platform software object-manager switch active f0 object 3624 parents <-- Utilize the aom id value

```

Object identifier: 496
  Description: adj 0x46, Flags None
  Status: Done

```

C9300-PE-2#show platform software fed switch active mpls forwarding label 17 detail

```

LENTRY:label:17 nobj:(LABEL, 82) lentry_hdl:0x44000005
  modify_cnt:6 backwalk_cnt:0
  lsp_handle:0
  AAL: id:1140850693 lbl:17
    eos0:[adj_hdl:0x5f000032, hw_hdl:0x7fe8f8a52798]
    eos1:[adj_hdl:0x5f000032, hw_hdl:0x7fe8f8a52588]
    deagg_vrf_id = 0 lsp_handle:0
  LABEL:objid:82 link_type:MPLS local_label:17 outlabel:(16, 0) <-- Used in previous commands
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x5f000032
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:1593835570 lbl:0 smac:70d3.79be.ae71 dmac:d4ad.71b5.ddd6
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7fe8f8a93c78, ri_id:0x3a phdl:0x9f00004b, ref_cnt:1
    si:0x7fe8f8a91188, si_id:0x4011, di_id:0x535f
  ADJ:objid:70 {link_type:MPLS ifnum:0x36, si:0xaa000021, }


```

P و PEs تاهجوم ني ب ECMP عم L3VPN 2. ويراني سلا

ةي عجرم اي جولو بوط

Catalyst تالو حملا لمعت و، CE ةزهجأك Catalyst 3850 switches تالو حملا لمعت ، لاثملا اذه ضارغلأ

زاهج StackWise ةيرهاظلا ةفيظولا في Catalyst 9500 لمعت امنيب ، ةزهجك PE ، 9300 switches
 زكرم في لوكوتورب رواجت و OSPF ، و PE ، و CE ةزهجك نيب لوكوتورب لمعي P .
 (MPLS) ، تالوكوتوربالا ددعتم لي وحتلا بلق ل خاد . PE ةزهجك نيب iBGP VPNv4 رواجت عم ،
 و PE ةزهجك نيب ECMP دجوي .

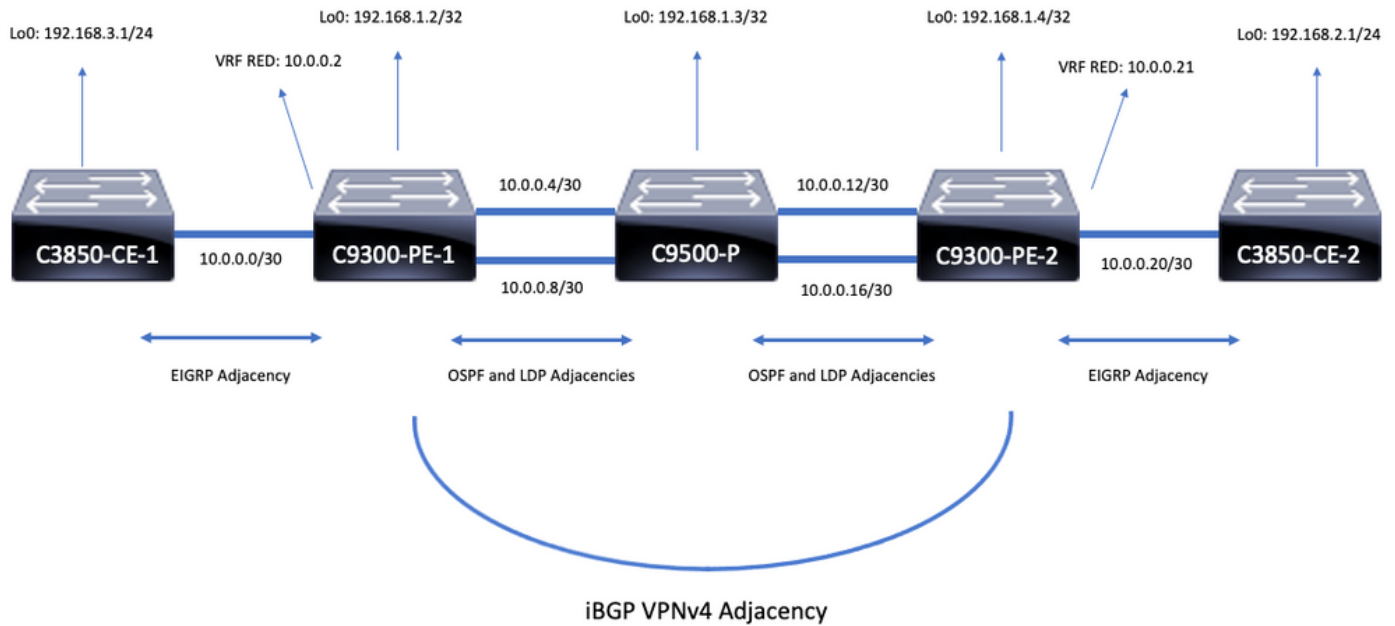

نيوكتالا ليصافت

نيوكت C3850-CE-1

```
hostname C3850-CE-1
!
interface Loopback0
ip address 192.168.3.1 255.255.255.0
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.1 255.255.255.252
!
router eigrp 420
network 10.0.0.0 0.0.0.3
network 192.168.3.0
eigrp stub connected summary
!
ip route 0.0.0.0 0.0.0.0 10.0.0.2
```

نيوكت C9300-PE-1

```
hostname C9300-PE-1
!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.2 255.255.255.255
```



```
!  
interface GigabitEthernet1/0/1  
no switchport  
ip vrf forwarding RED  
ip address 10.0.0.2 255.255.255.252  
!  
interface GigabitEthernet1/0/2  
no switchport  
ip address 10.0.0.5 255.255.255.252  
!  
interface GigabitEthernet1/0/3  
no switchport  
ip address 10.0.0.9 255.255.255.252  
!  
router eigrp 420  
!  
address-family ipv4 vrf RED  
network 10.0.0.0 0.0.0.3  
autonomous-system 420  
exit-address-family  
!  
router ospf 420  
network 0.0.0.0 255.255.255.255 area 0  
mpls ldp autoconfig  
!  
router bgp 69420  
bgp log-neighbor-changes  
neighbor 192.168.1.4 remote-as 69420  
neighbor 192.168.1.4 update-source Loopback0  
!  
address-family vpnv4  
neighbor 192.168.1.4 activate  
neighbor 192.168.1.4 send-community extended  
exit-address-family  
!  
address-family ipv4 vrf RED  
redistribute eigrp 420  
exit-address-family
```

نيوكت C9500-P

```
hostname C9500-P  
!  
interface Loopback0  
ip address 192.168.1.3 255.255.255.255  
!  
interface TenGigabitEthernet1/0/1  
no switchport  
ip address 10.0.0.6 255.255.255.252  
!  
interface TenGigabitEthernet1/0/2  
no switchport  
ip address 10.0.0.13 255.255.255.252  
!  
interface TenGigabitEthernet2/0/1  
no switchport  
ip address 10.0.0.10 255.255.255.252  
!  
interface TenGigabitEthernet2/0/2  
no switchport  
ip address 10.0.0.17 255.255.255.252  
!  
router ospf 420
```

```
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
```

نيوكت C9300-PE-2

```
hostname C9300-PE-2
!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.4 255.255.255.255
!
interface GigabitEthernet2/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.21 255.255.255.252
!
interface GigabitEthernet2/0/2
no switchport
ip address 10.0.0.14 255.255.255.252
!
interface GigabitEthernet2/0/3
no switchport
ip address 10.0.0.18 255.255.255.252
!
router eigrp 400
!
address-family ipv4 vrf RED
network 10.0.0.20 0.0.0.3
autonomous-system 400
exit-address-family
!
router ospf 420
passive-interface GigabitEthernet2/0/24
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.2 remote-as 69420
neighbor 192.168.1.2 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.2 activate
neighbor 192.168.1.2 send-community extended
exit-address-family
!
address-family ipv4 vrf RED
redistribute eigrp 400
exit-address-family
```

نيوكت C3850-CE-2

```
hostname C3850-CE-2
!
interface Loopback0
ip address 192.168.2.1 255.255.255.0
```

```

!
interface TenGigabitEthernet2/0/1
no switchport
ip address 10.0.0.22 255.255.255.252
!
router eigrp 400
network 10.0.0.20 0.0.0.3
network 192.168.2.0
eigrp stub connected summary
!
ip route 0.0.0.0 0.0.0.0 10.0.0.21

```

يساسأل ققحتال

اهنم ققحتال بجي ةساسأ تابلطتم كانه، MPLS ةحمررب ةحص نم ققحتال لبق

- دوجوم PE لى PE لاصتا ةحص نم ققحتال
- PEs ني ب (LSP) ةيمستلل لوجملا راسملا ةحص نم ققحتال
- PEs ني ب BGPv4 رواجت نم ققحتال
- LDP و VPNv4 تايست ةحص نم ققحتال
- MPLS هيچوت ةداع لودج ةحص نم ققحتال

PE لى PE لاصتا نم ققحتال

دكؤي ال اذه نكلو، يلحملا عاجرتسال نم ردصملاو ديعلال PE عاجرتسال لاصتا رابتخا كنكمي عاجرتسال IP نيوانع نع نالعالا متي هنال ارظن، ديچ (LSP) MPLS ةمالعل لوجملا راسملا نال يلفسال اعجالا ف.

ةصاخلا Loopback0 تاهجاو لالخنم MP-BGP VPNv4 PE to PE رواجت ققحت متي: **ةظالم** اها.

```

C9300-PE-1#ping 192.168.1.4 source 192.168.1.2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.1.4, timeout is 2 seconds:
Packet sent with a source address of 192.168.1.2
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms

```

```

C9300-PE-1#show ip route 192.168.1.4
Routing entry for 192.168.1.4/32
  Known via "ospf 420", distance 110, metric 3, type intra area
  Last update from 10.0.0.10 on GigabitEthernet1/0/3, 18:39:30 ago
  Routing Descriptor Blocks:
    10.0.0.10, from 192.168.1.4, 18:39:30 ago, via GigabitEthernet1/0/3
      Route metric is 3, traffic share count is 1
    * 10.0.0.6, from 192.168.1.4, 18:39:30 ago, via GigabitEthernet1/0/2
      Route metric is 3, traffic share count is 1

```

LSP ةحص نم ققحتال

تايست عيجمو LSP نم ققحتال لوجملا PE لى PE لاصتا ةحص نم ققحتال لبق، MPLS traceroute م ادختسا كنكمي راسملا لىع MPLS LDP.

ال اذهو، LDP ةيمست، ةدحاو ةيمست يوس اذه MPLS traceroute لى ضرفي ال: **ةظالم** م ادختساب اهضر ف متي رورملا ةكرح نال ثيچ، ةحجان CE نم رورملا ةكرح نال ثيچ (ةيخراخا ل) LDP ةقصلملاو (ةيلخادلا) VPNv4 ةقصلملاو، نيقيصلم.

```
C9300-PE-1#tracert mpls ipv4 192.168.1.4/32 source 192.168.1.2
Tracing MPLS Label Switched Path to 192.168.1.4/32, timeout is 2 seconds
```

```
Codes: '!' - success, 'Q' - request not sent, '.' - timeout,
'L' - labeled output interface, 'B' - unlabeled output interface,
'D' - DS Map mismatch, 'F' - no FEC mapping, 'f' - FEC mismatch,
'M' - malformed request, 'm' - unsupported tlvs, 'N' - no label entry,
'P' - no rx intf label prot, 'p' - premature termination of LSP,
'R' - transit router, 'I' - unknown upstream index,
'l' - Label switched with FEC change, 'd' - see DDMAP for return code,
'X' - unknown return code, 'x' - return code 0
```

Type escape sequence to abort.

```
0 10.0.0.5 MRU 1500 [Labels: 17 Exp: 0]
L 1 10.0.0.6 MRU 1500 [Labels: explicit-null Exp: 0] 7 ms
! 2 10.0.0.18 1 ms
```

حج ان VPNv4 دوجو راهظا دي رتو CE فلخ زاغ وا CE لى لوصول قح كيدل نكي مل اذا
CE هجاوت يتل اة هجاول نم لاصلت ال رابتخا ة لواجم كنكمي LDP ربع تامالعال ري صم/ضرفو
دي ب ال PE لى ل VRF في CE هجاوت يتل اة هجاول لى ل PE لى ل VRF في

```
C9300-PE-1#ping vrf RED 10.0.0.21 source 10.0.0.2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.21, timeout is 2 seconds:
Packet sent with a source address of 10.0.0.2
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
```

PEs ني ب BGP VPNv4 رواجت نم ققحتل

```
C9300-PE-1#show bgp vpnv4 unicast all neighbors 192.168.1.4
BGP neighbor is 192.168.1.4, remote AS 69420, internal link
  BGP version 4, remote router ID 192.168.1.4
  BGP state = Established, up for 18:40:49
  Last read 00:00:40, last write 00:00:47, hold time is 180, keepalive interval is 60 seconds
  Neighbor sessions:
    1 active, is not multisession capable (disabled)
  Neighbor capabilities:
    Route refresh: advertised and received(new)
    Four-octets ASN Capability: advertised and received
    Address family IPv4 Unicast: advertised and received
    Address family VPNv4 Unicast: advertised and received
    Enhanced Refresh Capability: advertised and received
    Multisession Capability:
      Stateful switchover support enabled: NO for session 1
  Message statistics:
    InQ depth is 0
    OutQ depth is 0

      Sent          Rcvd
Opens:             1          1
Notifications:    0          0
Updates:           4          4
Keepalives:       1237       1233
Route Refresh:    0          0
Total:            1242       1238

Do log neighbor state changes (via global configuration)
Default minimum time between advertisement runs is 0 seconds
<snip>
```

```

C9300-PE-2#show bgp vpnv4 unicast all neighbors 192.168.1.2
BGP neighbor is 192.168.1.2, remote AS 69420, internal link
  BGP version 4, remote router ID 192.168.1.2
  BGP state = Established, up for 18:41:36
  Last read 00:00:42, last write 00:00:32, hold time is 180, keepalive interval is 60 seconds
  Neighbor sessions:
    1 active, is not multisession capable (disabled)
  Neighbor capabilities:
    Route refresh: advertised and received(new)
    Four-octets ASN Capability: advertised and received
    Address family IPv4 Unicast: advertised and received
    Address family VPNv4 Unicast: advertised and received
    Enhanced Refresh Capability: advertised and received
    Multisession Capability:
    Stateful switchover support enabled: NO for session 1
  Message statistics:
    InQ depth is 0
    OutQ depth is 0

                Sent          Rcvd
Opens:           1             1
Notifications:   0             0
Updates:         4             4
Keepalives:     1234          1238
Route Refresh:   0             0
Total:          1239          1243
Do log neighbor state changes (via global configuration)
Default minimum time between advertisement runs is 0 seconds

```

قائمة جيران PE VPNv4، دع ب نع رواجت لي غشت مت

```

C9300-PE-1#show bgp vpnv4 unicast all summary
BGP router identifier 192.168.1.2, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 18:49:56 Jun 23 2021 UTC (18:41:06.070 ago)

Neighbor      V          AS MsgRcvd MsgSent   TblVer  InQ  OutQ  Up/Down  State/PfxRcd
192.168.1.4   4          69420   1240   1244       7     0     0 18:41:59         2

```

```

C9300-PE-2#show bgp vpnv4 unicast all summary
BGP router identifier 192.168.1.4, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 18:49:37 Jun 23 2021 UTC (18:41:06.851 ago)

Neighbor      V          AS MsgRcvd MsgSent   TblVer  InQ  OutQ  Up/Down  State/PfxRcd
192.168.1.2   4          69420   1244   1240       7     0     0 18:42:17         2

```

صاخ VRF تائ دابلا تل داب ام تقود

```
C9300-PE-1#show ip bgp vpnv4 vrf RED
```

```
BGP table version is 7, local router ID is 192.168.1.2
```

```
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
               t secondary path, L long-lived-stale,
```

```
Origin codes: i - IGP, e - EGP, ? - incomplete
```

```
RPKI validation codes: V valid, I invalid, N Not found
```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*> 10.0.0.0/30	0.0.0.0	0		32768	?
*>i 10.0.0.20/30	192.168.1.4	0	100	0	?
*>i 192.168.2.0	192.168.1.4	130816	100	0	?
*> 192.168.3.0	10.0.0.1	130816		32768	?

```
C9300-PE-2#show ip bgp vpnv4 vrf RED
```

```
BGP table version is 7, local router ID is 192.168.1.4
```

```
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
               t secondary path, L long-lived-stale,
```

```
Origin codes: i - IGP, e - EGP, ? - incomplete
```

```
RPKI validation codes: V valid, I invalid, N Not found
```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*>i 10.0.0.0/30	192.168.1.2	0	100	0	?
*> 10.0.0.20/30	0.0.0.0	0		32768	?
*> 192.168.2.0	10.0.0.22	130816		32768	?
*>i 192.168.3.0	192.168.1.2	130816	100	0	?

VPNv4 و LDP تاي م س ت ة حص نم ق قحتلا

```
C9300-PE-1#show ip bgp vpnv4 vrf RED labels
```

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	0.0.0.0	20/nolabel(RED)
10.0.0.20/30	192.168.1.4	nolabel/20
192.168.2.0	192.168.1.4	nolabel/21 <-- VPNv4 label that is be imposed to reach
192.168.20		
192.168.3.0	10.0.0.1	21/nolabel

```
C9300-PE-1#show ip route vrf RED 192.168.2.1
```

```
Routing Table: RED
```

```
Routing entry for 192.168.2.0/24
```

```
Known via "bgp 69420", distance 200, metric 130816, type internal
```

```
Last update from 192.168.1.4 18:41:56 ago
```

```
Routing Descriptor Blocks:
```

```
* 192.168.1.4 (default), from 192.168.1.4, 18:41:56 ago
```

```
Route metric is 130816, traffic share count is 1
```

```
AS Hops 0
```

```
MPLS label: 21 <-- VPNv4 label that matches the previous output
```

```
MPLS Flags: MPLS Required
```

C9300-PE-2#show ip bgp vpnv4 vrf RED labels

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	192.168.1.2	nolabel/20
10.0.0.20/30	0.0.0.0	20/nolabel(RED)
192.168.2.0	10.0.0.22	21/nolabel <-- VPNv4 label that is advertised to reach 192.168.2.0
192.168.3.0	192.168.1.2	nolabel/21

C9300-PE-2#show ip route vrf RED 192.168.2.1

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Last update from 10.0.0.22 on GigabitEthernet2/0/1, 18:45:04 ago

Routing Descriptor Blocks:

* 10.0.0.22, from 10.0.0.22, 18:45:04 ago, via GigabitEthernet2/0/1 <-- **CE-facing interface in the VRF**

Route metric is 130816, traffic share count is 1

Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit

Reliability 255/255, minimum MTU 1500 bytes

Loading 1/255, Hops 1

ةمدختس م ال LDP تاي مست نم ق قحتل

C9300-PE-1#show mpls forwarding-table 192.168.1.4

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
19	17	192.168.1.4/32	0	Gi1/0/2	10.0.0.6 <-- 17 is the LDP label imposed to reach PE at 192.168.1.4 through Gi1/0/2
	17	192.168.1.4/32	0	Gi1/0/3	10.0.0.10 <-- 17 is the LDP label imposed to reach PE at 192.168.1.4 through Gi1/0/3

C9300-PE-2#show mpls forwarding-table 192.168.1.2

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
17	16	192.168.1.2/32	0	Gi2/0/2	10.0.0.13 <-- 16 is the LDP label imposed to reach PE at 192.168.1.2 through Gi2/0/2
	16	192.168.1.2/32	0	Gi2/0/3	10.0.0.17 <-- 16 is the LDP label imposed to reach PE at 192.168.1.2 through Gi2/0/3

م هجوت ةداع لودج ةحص نم ق قحتل MPLS

C9300-PE-1#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0	Gi1/0/2	10.0.0.6
	Pop Label	192.168.1.3/32	0	Gi1/0/3	10.0.0.10
17	Pop Label	10.0.0.16/30	0	Gi1/0/2	10.0.0.6
	Pop Label	10.0.0.16/30	0	Gi1/0/3	10.0.0.10
18	Pop Label	10.0.0.12/30	0	Gi1/0/2	10.0.0.6
	Pop Label	10.0.0.12/30	0	Gi1/0/3	10.0.0.10
19	17	192.168.1.4/32	0	Gi1/0/2	10.0.0.6
	17	192.168.1.4/32	0	Gi1/0/3	10.0.0.10
20	No Label	10.0.0.0/30[V]	630	aggregate/RED	
21	No Label	192.168.3.0/24[V]	\		

```

0 Gi1/0/1 10.0.0.1
C9300-PE-2#show mpls forwarding-table
Local Outgoing Prefix Bytes Label Outgoing Next Hop
Label Label or Tunnel Id Switched interface
16 Pop Label 192.168.1.3/32 0 Gi2/0/2 10.0.0.13
Pop Label 192.168.1.3/32 0 Gi2/0/3 10.0.0.17
17 16 192.168.1.2/32 0 Gi2/0/2 10.0.0.13
16 192.168.1.2/32 0 Gi2/0/3 10.0.0.17
18 Pop Label 10.0.0.4/30 0 Gi2/0/2 10.0.0.13
Pop Label 10.0.0.4/30 0 Gi2/0/3 10.0.0.17
19 Pop Label 10.0.0.8/30 0 Gi2/0/2 10.0.0.13
Pop Label 10.0.0.8/30 0 Gi2/0/3 10.0.0.17
20 No Label 10.0.0.20/30[V] 630 aggregate/RED
21 No Label 192.168.2.0/24[V] \
0 Gi2/0/1 10.0.0.22

```

تأثيرات لوكي لوصول مدمختم ال (LDP) لوجراخ او (VPNv4) لخدال تايم سالت دي كأت في VRF

```

C9300-PE-1#show ip cef vrf RED 192.168.2.0/24 detail
192.168.2.0/24, epoch 0, flags [rib defined all labels]
recursive via 192.168.1.4 label 21 <-- VPNv4 label
nexthop 10.0.0.6 GigabitEthernet1/0/2 label 17-(local:19) <-- 17 is the LDP label that is
imposed to reach the remote PE, 19 is the local LDP label advertised to the P router
nexthop 10.0.0.10 GigabitEthernet1/0/3 label 17-(local:19)<-- 17 is the LDP label that is
imposed to reach the remote PE, 19 is the local LDP label advertised to the P router

```

```

C9300-PE-2#show ip cef vrf RED 192.168.3.0/24 detail
192.168.3.0/24, epoch 0, flags [rib defined all labels]
recursive via 192.168.1.2 label 21 <-- VPNv4 label
nexthop 10.0.0.13 GigabitEthernet2/0/2 label 16-(local:17) <-- 16 is the LDP label that is
imposed to reach the remote PE, 17 is the local LDP label advertised to the P router
nexthop 10.0.0.17 GigabitEthernet2/0/3 label 16-(local:17) <-- 16 is the LDP label that is
imposed to reach the remote PE, 17 is the local LDP label advertised to the P router

```

تاتانك ال ريدم تايا صرح نم ققحت ال

ة قلع تاتانك دجوت ال، لة لاثم ال تاو يران س ال في

```

C9300-PE-1#show platform software object-manager switch active f0 statistics

```

Forwarding Manager Asynchronous Object Manager Statistics

Object update: Pending-issue: 0, Pending-acknowledgement: 0

Batch begin: Pending-issue: 0, Pending-acknowledgement: 0

Batch end: Pending-issue: 0, Pending-acknowledgement: 0

Command: Pending-acknowledgement: 0

Total-objects: 491

Stale-objects: 0

Resolve-objects: 0

Childless-delete-objects: 0

Error-objects: 0

Paused-types: 0

```

9500-P#show platform software object-manager switch active f0 statistics

```

Forwarding Manager Asynchronous Object Manager Statistics

Object update: Pending-issue: 0, Pending-acknowledgement: 0

Batch begin: Pending-issue: 0, Pending-acknowledgement: 0

Batch end: Pending-issue: 0, Pending-acknowledgement: 0


```
Command: Pending-acknowledgement: 0
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
C9300-PE-2#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin: Pending-issue: 0, Pending-acknowledgement: 0
Batch end: Pending-issue: 0, Pending-acknowledgement: 0
Command: Pending-acknowledgement: 0
Total-objects: 482
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

ةدابل ةجرمرب

C9300-PE-1، C9500-P، و MPLS، C9300-PE-1، ةجرمرب لىل ةدابل ةجرمرب لىل مسقلا يطغي.

C9300-PE-1 ةدابل ةجرمرب

Software Prefix Programming

```
C9300-PE-1#show ip route vrf RED 192.168.2.1
```

```
Routing Table: RED
Routing entry for 192.168.2.0/24
  Known via "bgp 69420", distance 200, metric 130816, type internal
  Last update from 192.168.1.4 19:21:45 ago
  Routing Descriptor Blocks:
    * 192.168.1.4 (default), from 192.168.1.4, 19:21:45 ago <-- Remote PE reachable in the global routing table
      Route metric is 130816, traffic share count is 1
      AS Hops 0
      MPLS label: 21 <-- VPNv4 label
      MPLS Flags: MPLS Required
```

```
C9300-PE-1#show ip route 192.168.1.4
```

```
Routing entry for 192.168.1.4/32
  Known via "ospf 420", distance 110, metric 3, type intra area
  Last update from 10.0.0.10 on GigabitEthernet1/0/3, 19:23:17 ago
  Routing Descriptor Blocks:
    10.0.0.10, from 192.168.1.4, 19:23:17 ago, via GigabitEthernet1/0/3 <-- Next-hop to reach 192.168.1.4
      Route metric is 3, traffic share count is 1
    * 10.0.0.6, from 192.168.1.4, 19:23:17 ago, via GigabitEthernet1/0/2 <-- Next-hop to reach 192.168.1.4
      Route metric is 3, traffic share count is 1
```

FMAN RP Prefix Programming

```
C9300-PE-1#show ip vrf detail
```

```
VRF RED (VRF Id = 2); default RD 69:69; default VPNID <-- VRF ID is important in subsequent command
  Old CLI format, supports IPv4 only
  Flags: 0xC
```

Interfaces:
Gi1/0/1
Address family ipv4 unicast (Table ID = 0x2):
Flags: 0x0
Export VPN route-target communities
RT:69:69
Import VPN route-target communities
RT:69:69
No import route-map
No global export route-map
No export route-map
VRF label distribution protocol: not configured
VRF label allocation mode: per-prefix

C9300-PE-1#show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24 <--
- Index value is the VRF ID from previous command

Forwarding Table

Prefix/Len	Next Object	Index
-----	-----	-----
192.168.2.0/24	OBJ_LABEL	0x78

C9300-PE-1#show platform software mpls switch active r0 label index 0x78 <-- Utilize the Index
value from previous command

Label OCE 0x78 -> OBJ_LOADBALANCE (0x70) <-- Utilized in next command

Flags: Real, Number of labels in the OCE: 1
Label values: 0x15
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480644d88

C9300-PE-1#show platform software loadinfo switch active r0 index 0x70 <-- Utilize the
OBJ_LOADBALANCE value from previous command

Number of loadinfo objects: 8

Index: 0x70, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16
Anti-polarising Factor: 0xf4a19ba0
Next Object Type: OBJ_LABEL, OBJ_LABEL
Next obj handle: 0x6e, 0x6f
Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1
Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0
OM handle: 0x3480641fb8

C9300-PE-1#show platform software mpls switch active r0 label index 0x6e <-- Utilize the obj
handle value from previous command

Label OCE 0x6e -> OBJ_ADJACENCY (0x4b)

Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x34806420d0

C9300-PE-1#show platform software mpls switch active r0 label index 0x6f <-- Utilize the obj
handle value from previous command

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)

Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480642268

C9300-PE-1#show platform software adjacency switch active r0 index 0x4b <-- Utilize the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x4b (75)

Interface: GigabitEthernet1/0/2, IF index: 54, Link Type: MCP_LINK_TAG

Encap: d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47 <-- MAC ending in DDE4 is the DMAC, MAC ending in D1D6 is SMAC, 8847 is MPLS ETYPE

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: unknown

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: 10.0.0.6 <-- Next-hop IP address

IP FRR MCP_ADJ_IPFRR_NONE 0

OM handle: 0x34806375f8

C9300-PE-1#show platform software adjacency switch active r0 index 0x4e <-- Utilize the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x4e (78)

Interface: GigabitEthernet1/0/3, IF index: 55, Link Type: MCP_LINK_TAG

Encap: d4:ad:71:b5:dd:c2:a0:f8:49:11:d1:d8:88:47 <-- MAC ending DDC2 is the DMAC, MAC ending in D1D8 is the SMAC, 8847 is the MPLS ETYPE

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: unknown

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: 10.0.0.10 <-- Next-hop IP address

IP FRR MCP_ADJ_IPFRR_NONE 0

OM handle: 0x3480638200

FMAN FP Prefix Programming

C9300-PE-1#show ip vrf detail

VRF RED (VRF Id = 2); default RD 69:69; default VPNID

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gil/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

C9300-PE-1#show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24 detail <-- Index value is the VRF ID from previous command

Forwarding Table

192.168.2.0/24 -> OBJ_LABEL (0x78), urpf: 118

Prefix Flags: unknown

aom id: 618, HW handle: (nil) (created)

C9300-PE-1#show platform software mpls switch active f0 label index 0x78 <-- Use the OBJ_LABEL value from previous command

Label OCE 0x78 -> OBJ_LOADBALANCE (0x70)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x15
Backup flags: Pop, UHP, backup label 0x100001
aom id: 617, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software object-manager switch active f0 object 617 parents <-- Use the aom id from previous command

Object identifier: 600
Description: LB 0x70
Status: Done

C9300-PE-1#show platform software loadinfo switch active f0 index 0x70 <-- Use the LB value from previous command

Number of loadinfo objects: 8

Index: 0x70, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16
Anti-polarising Factor: 0xf4a19ba0
Next Object Type: OBJ_LABEL, OBJ_LABEL
Next obj handle: 0x6e, 0x6f
Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1
Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0
aom id: 600, HW handle: (nil)

C9300-PE-1#show platform software mpls switch active f0 label index 0x6e <-- Use the obj handle values from previous commands

Label OCE 0x6e -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 598, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software mpls switch active f0 label index 0x6f <-- Use the obj handle values from previous command

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 599, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software adjacency switch active f0 index 0x4b <-- Use the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x4b (75)
Interface: GigabitEthernet1/0/2, IF index: 54, Link Type: MCP_LINK_TAG
Encap: d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.6
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 531, HW handle: (nil) (created)

C9300-PE-1#show platform software adjacency switch active f0 index 0x4e <-- Use the

OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x4e (78)

Interface: GigabitEthernet1/0/3, IF index: 55, Link Type: MCP_LINK_TAG

Encap: d4:ad:71:b5:dd:c2:a0:f8:49:11:d1:d8:88:47

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: unknown

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: 10.0.0.10

IP FRR MCP_ADJ_IPFRR_NONE 0

aom id: 535, HW handle: (nil) (created)

*****FED Prefix Programming*****

C9300-PE-1#show platform software fed switch active ip route vrf-name RED 192.168.2.0/24

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
-----	------	-----	-------	-----	------	------	-------

---	----	---	-----	---	----	-----	-----
-----	------	-----	-------	-----	------	-------	-------

2	192.168.2.0/24		0x7fbae8d86228	0x0	0	0	lspa0x2
---	----------------	--	----------------	-----	---	---	---------

2021/06/23 18:50:13.079 <-- HTM value significant for next command

FIB: prefix_hdl:0x50000026, mpls_ecr_prefix_hdl:0

=====
OCE chain
=====

LABEL:objid:120 link_type:IP local_label:1048577 outlabel:(21, 0) <-- VPNv4 label

flags:0x1:(REAL,) pdflags:0x80:(INSTALL_HW_OK,RECIR_ADJ,) adj_handle:0xcb00003c <--

adj_handle and local_adj_hdl values must match

unsupported recursion:0 olbl_changed 0 local_adj:1 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:3405774908 lbl:19 smac:0000.0000.0000 dmac:0000.0000.0000 <-- Label 19 matches the

local transport label

sub_type:0 link_type:0 adj_flags:0x10 label_type:0 rewrite_type:PSH2(121)

vlan_id:0 vrf_id:0 ri:0x7fbae8d73648, ri_id:0x46 phdl:0, ref_cnt:2 <-- ri_id and

ri_idx values must match

si:0x7fbae8d834d8, si_id:0xb6, di_id:0x5013

LB:obj_id:112 link_type:IP num_choices:2 Flags:0

mpls_ecr:1 local_label:19 path_inhw:2 ecrh:0x7d000002 old_ecrh:0

modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0

bwalk:[req:0 in_prog:0 nested:0]

AAL: ecr:id:2097152002 af:0 ecr_type:0 ref:7 ecrh:0x7fbae8a99268(28:2)

hwhdl:3903427176 ::0x7fbae8a98b98,0x7fbae8a9ad48,0x7fbae8a98b98,0x7fbae8a9ad48

Sw Enh ECR scale: objid:112 llabel:19 eos:1 #adjs:2 mixed_adj:0

reprogram_hw:0 ecrhdl:0x7d000002 ecr_hwhdl:0x7fbae8a99268

mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0

ecr_adj: id:4278190135 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:1744830509

sih:0x7fbae8a98b98(179) di_id:20499 rih:0x7fbae8a985d8(33)

adj_lentry [eos0:0x7fbae8d7bf48 eos1:0x7fbae8d76e88]

ecr_adj: id:1392508984 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:2013265966

sih:0x7fbae8a9ad48(180) di_id:20499 rih:0x7fbae8a9a788(46)

adj_lentry [eos0:0x7fbae8d7c1b8 eos1:0x7fbae8d77158]

ecr_prefix_adj: id:2164260921 (ref:1)

sih:0x7fbae8d7df08(181) di_id:20499 rih:0x7fbae8d7db98(68)

LABEL:objid:110 link_type:MPLS local_label:19 outlabel:(17, 0) <-- Label 19 is the local transport label, Label 17 is the LDP label

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xff000037

unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:4278190135 lbl:0 smac:a0f8.4911.d1d6 dmac:d4ad.71b5.dde4 <-- Matches next-hop

information to reach 192.168.2.0/24

sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)

vlan_id:0 vrf_id:0 ri:0x7fbae8d78c48, ri_id:0x40 phdl:0x9f00004b, ref_cnt:1


```
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:
```

```
index = 0x535f
pmap = 0x00000000 0x00000002 <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000
000 0000 0000 0010 = Port 1 (Zero based, count right to left)
```

```
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
```

```
C9300-PE-1#show platform hardware fed switch active fwd-asic resource asic all destination-index
range 0x5360 0x5360 <-- Utilize the di_id from the previous command ASIC#0:
ASIC#0:
```

```
index = 0x5360
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:
```

```
index = 0x5360
pmap = 0x00000000 0x00000004 <-- Looking at 0x00000004, in binary that is 0000 0000 0000 0000
0000 0000 0000 0100 = Port 2 (Zero based, count right to left)
```

```
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
```

```
npuIndex = 0
stripSeg = 0
copySeg = 0
```

```
C9300-PE-1#show platform software fed switch active ifm map
```

```
Interface          IF_ID      Inst Asic Core Port SubPort Mac  Cntx LPN  GPN  Type Active
GigabitEthernet1/0/2  0x36      1  0  1  1  0  6  7  2  2  NIF  Y <--
Port 1 is an egress port, Gi1/0/2
GigabitEthernet1/0/3  0x37      1  0  1  2  0  28  8  3  3  NIF  Y <--
Port 2 is an egress port, Gi1/0/3
```

C9500 تائىدابلا ةچمرب

Software Prefix Programming

```
C9500-P#show ip route 192.168.1.4
```

```
Routing entry for 192.168.1.4/32
```

```
Known via "ospf 420", distance 110, metric 2, type intra area
```

```
Last update from 10.0.0.18 on TenGigabitEthernet2/0/2, 20:15:25 ago
```

```
Routing Descriptor Blocks:
```

```
 10.0.0.18, from 192.168.1.4, 20:15:25 ago, via TenGigabitEthernet2/0/2 <-- Next-hop towards 192.168.1.4
```

```
Route metric is 2, traffic share count is 1
```

```
* 10.0.0.14, from 192.168.1.4, 20:15:25 ago, via TenGigabitEthernet1/0/2 <-- Next-hop towards 192.168.1.4
```

```
Route metric is 2, traffic share count is 1
```

```
C9500-P#show ip cef 192.168.1.4 detail
```

```
192.168.1.4/32, epoch 4, per-destination sharing
```

```
dfmt local label info: global/17 [0x3]
```

```
nexthop 10.0.0.14 TenGigabitEthernet1/0/2 label explicit-null-(local:17) <-- Explicit null to reach 192.168.1.4
```

```
nexthop 10.0.0.18 TenGigabitEthernet2/0/2 label explicit-null-(local:17) <-- Explicit null to reach 192.168.1.4
```

FMAN RP Prefix Programming

```
C9500-P#show platform software ip switch active r0 cef prefix 192.168.1.4/32
```

```
Forwarding Table
```

```
Prefix/Len          Next Object          Index
-----
192.168.1.4/32      OBJ_LOADBALANCE      0x6a
```

```
C9500-P#show platform software loadinfo switch active r0 index 0x6a <-- Use the OBJ_LOADBALANCE value from previous command
```

```
Number of loadinfo objects: 4
```

```
Index: 0x6a, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16
```

```
Anti-polarising Factor: 0x57a70068
```

```
Next Object Type: OBJ_LABEL, OBJ_LABEL
```

```
Next obj handle: 0x68, 0x69
```

```
Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1
```

```
Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0
```

```
OM handle: 0x348064de58
```

```
C9500-P#show platform software mpls switch active r0 label index 0x68 <-- Use the obj handle values from the previous command
```

```
Label OCE 0x68 -> OBJ_ADJACENCY (0x49)
```

```
Flags: Real, Number of labels in the OCE: 1
```

```
Label values: 0
```

```
Backup flags: Pop, UHP, backup label 0x100001
```


OM handle: 0x348064df70

C9500-P#show platform software mpls switch active r0 label index 0x69

Label OCE 0x69 -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064e108

C9500-P#show platform software adjacency switch active r0 index 0x49 <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x49 (73)
Interface: TenGigabitEthernet1/0/2, IF index: 66, Link Type: MCP_LINK_TAG
Encap: 70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47 <-- MAC ending in AE71 is the DMAC, MAC ending is B5DD is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.14 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480647700

C9500-P#show platform software adjacency switch active r0 index 0x4e <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x4e (78)
Interface: TenGigabitEthernet2/0/2, IF index: 68, Link Type: MCP_LINK_TAG
Encap: 70:d3:79:be:ae:61:d4:ad:71:b5:dd:f1:88:47 <-- MAC ending in AE61 is DMAC, MAC ending in B5DD is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.18 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480648f68

FMAN FP Prefix Programming

C9500-P#show platform software ip switch active f0 cef prefix 192.168.1.4/32

Forwarding Table

Prefix/Len	Next Object	Index
192.168.1.4/32	OBJ_LOADBALANCE	0x6a

C9500-P#show platform software loadinfo switch active f0 index 0x6a <-- Use the OBJ_LOADBALANCE value from previous command

Number of loadinfo objects: 4

Index: 0x6a, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16
Anti-polarising Factor: 0x57a70068
Next Object Type: OBJ_LABEL, OBJ_LABEL
Next obj handle: 0x68, 0x69
Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1
Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0

aom id: 578, HW handle: (nil)

C9500-P#show platform software mpls switch active f0 label index 0x68 <-- Use the obj handle values from previous command

Label OCE 0x68 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 576, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 0x69 <-- Use the obj handle values from previous command

Label OCE 0x69 -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 577, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software adjacency switch active f0 index 0x49 <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x49 (73)
Interface: TenGigabitEthernet1/0/2, IF index: 66, Link Type: MCP_LINK_TAG
Encap: 70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47 <-- MAC ending in AE71 is the DMAC, MAC ending in DDD6 is the SMAC, 8847 is the MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.14 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 536, HW handle: (nil) (created)

C9500-P#show platform software adjacency switch active f0 index 0x4e <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x4e (78)
Interface: TenGigabitEthernet2/0/2, IF index: 68, Link Type: MCP_LINK_TAG
Encap: 70:d3:79:be:ae:61:d4:ad:71:b5:dd:f1:88:47 <-- MAC ending in AE61 is the DMAC, MAC ending in DDF1 is the SMAC, 8847 is the MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.18 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 545, HW handle: (nil) (created)

FED Prefix Programming

C9500-P#show platform software fed switch active ip route 192.168.1.4/32

Table with columns: vrf, dest, htm, flags, SGT, DGID, MPLS, Last-modified. Row 1: 0, 192.168.1.4/32, 0x7f0b284c1118, 0x0, 0, 0. Includes a footer note: 2021/06/23 18:47:01.761 <-- HTM value important for subsequent command

```

FIB: prefix_hdl:0x9b000020, mpls_ecr_prefix_hdl:0xdd00003a
===== OCE chain =====
LB:obj_id:106 link_type:IP num_choices:2 Flags:0
    mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0x44000002 old_ecrh:0
    modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
    bwalk:[req:0 in_prog:0 nested:0]
AAL: ecr:id:1140850690 af:0 ecr_type:0 ref:2 ecrh:0x7f0b284a3998(28:2)
hwhdl:675953048 ::0x7f0b284b4268,0x7f0b284a1d78,0x7f0b284b4268,0x7f0b284a1d78
Sw Enh ECR scale: objid:106 llabel:17 eos:1 #adjs:2 mixed_adj:0
reprogram_hw:0 ecrhdl:0x44000002 ecr_hwhdl:0x7f0b284a3998
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:4127195192 is_mpls_adj:1 l3adj_flags:0x100000
    recirc_adj_id:1207959601
        sih:0x7f0b284b4268(181) di_id:23709 rih:0x7f0b284b3ca8(31)
        adj_lentry [eos0:0x7f0b284c38e8 eos1:0x7f0b284cd858]
ecr_adj: id:1157627961 is_mpls_adj:1 l3adj_flags:0x100000
    recirc_adj_id:67108914
        sih:0x7f0b284a1d78(182) di_id:23709 rih:0x7f0b284b47d8(44)
        adj_lentry [eos0:0x7f0b284c3af8 eos1:0x7f0b284cdb28]
ecr_prefix_adj: id:3707764794 (ref:1)
    sih:0x7f0b284c5028(184) di_id:23709 rih:0x7f0b284c4c48(60)
LABEL:objid:104 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local
transport label, 0 is the LDP label
    flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xf6000038
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:4127195192 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71 <-- Matches the next-
hop information to reach 192.168.1.4/32
        sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
        vlan_id:0 vrf_id:0 ri:0x7f0b284ceaa8, ri_id:0x38 phdl:0x76000058, ref_cnt:1
        si:0x7f0b284ceeb8, si_id:0x400b, di_id:0x2 <-- Used in subsequent commands
ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x1f000028, }
LABEL:objid:105 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local
transport label, 0 is the LDP label
    flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x45000039
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:1157627961 lbl:0 smac:d4ad.71b5.ddf1 dmac:70d3.79be.ae61 <-- Matches the next-
hop information to reach 192.168.1.4/32
        sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
        vlan_id:0 vrf_id:0 ri:0x7f0b284c4588, ri_id:0x3a phdl:0x5500005a, ref_cnt:1
        si:0x7f0b284d0548, si_id:0x400c, di_id:0x62 <-- Used in subsequent commands
ADJ:objid:78 {link_type:MPLS ifnum:0x44, si:0x4900002a, }
=====
MPLS info: mpls_ecr_scale_prefix_adj:0xdd00003a, mpls_lspa_hdl:0
=====

```

```

C9500-P#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f0b284c1118 1 <-- Use the HTM value from previous command

```

```

Handle:0x7f0b284c1118 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-
ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f0b284c1328
Features sharing this resource:Cookie length: 12
04 01 a8 c0 00 00 00 d0 07 00 00 00

```

```

Detailed Resource Information (ASIC# 0)
-----

```

```

Number of HTM Entries: 1

```

```

Entry 0: (handle 0x7f0b284c1328)

```

```

Absolute Index: 126650

```

```

Time Stamp: 1

```

```

KEY - vrf:0 mtr:0 prefix:192.168.1.4 rcp_redirect_index:0x0

```

MASK - vrf:0 mtr:0 **prefix:0.0.0.0** rcp_redirect_index:0x0
FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5
afdLabelOrDestClientId:0 SI:184 destined_to_us:0 hw_stats_idx:1 stats_id:0
redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0
SRC-AD = learning_violation:0 need_to_learn:0 locally_connected:0 staticentryViolation:0
rpfValid:1 rpfLe:2 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1
rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UseRpfmatchTable:1
rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,
sgtCacheControl0 = 0
port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0
group_label:0x0 group_mask:0x0

=====

C9500-P#**show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x2 0x2** <-- Use the di_id values from previous command

ASIC#0:

index = 0x2
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

index = 0x2
pmap = 0x00000000 **0x00000002** <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000
0000 0000 0000 0010 = Port 1 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

C9500-P#**show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x62 0x62**

ASIC#0:

index = 0x62
pmap = 0x00000000 **0x00008000** <-- Looking at 0x00008000, in binary that is 0000 0000 0000 0000
1000 0000 0000 0000 = Port 15 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]

ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

index = 0x62
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

C9500-P#show platform software fed switch standby ip route 192.168.1.4/32

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
---	----	---	-----	---	----	-----	-----
0	192.168.1.4/32		0x7f57c0545938 0x0	0	0		

2021/06/23 18:46:51.399 <-- HTM value used in subsequent command

FIB: prefix_hdl:0x29000020, mpls_ecr_prefix_hdl:0x8f000039

=====
OCE chain =====

LB:obj_id:106 link_type:IP num_choices:2 Flags:0

mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0xf1000002 old_ecrh:0

modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0

bwalk:[req:0 in_prog:0 nested:0]

AAL: ecr:id:4043309058 af:0 ecr_type:0 ref:2 ecrh:0x7f57c04d2148(28:2)

hwhdl:3226280264 ::0x7f57c0547538,0x7f57c05497d8,0x7f57c0547538,0x7f57c05497d8

Sw Enh ECR scale: objid:106 llabel:17 eos:1 #adjs:2 mixed_adj:0

reprogram_hw:0 ecrhdl:0xf1000002 ecr_hwhdl:0x7f57c04d2148

mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0

ecr_adj: id:201326647 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:3925868592

sih:0x7f57c0547538(181) di_id:23717 rih:0x7f57c0546f18(31)

adj_lentry [eos0:0x7f57c04c8a08 eos1:0x7f57c04d07f8]

ecr_adj: id:738197560 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:3070230577

sih:0x7f57c05497d8(182) di_id:23717 rih:0x7f57c0547838(44)

adj_lentry [eos0:0x7f57c04c8c18 eos1:0x7f57c04d0ac8]

ecr_prefix_adj: id:2399141945 (ref:1)

sih:0x7f57c04c8788(184) di_id:23717 rih:0x7f57c04c8508(60)

LABEL:objid:104 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local transport label, 0 is the LDP label

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xc000037

unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:201326647 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71 <-- Matches next-hop

information to reach 192.168.1.4/32

sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)

vlan_id:0 vrf_id:0 ri:0x7f57c04d18e8, ri_id:0x38 phdl:0x76000058, ref_cnt:1

```

        si:0x7f57c04d1b18, si_id:0x400b, di_id:0x2 <-- di_id utilized in subsequent
commands
    ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0xdf000027, }
    LABEL:objid:105 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local
transport label, 0 is the LDP label
    flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x2c000038
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:738197560 lbl:0 smac:d4ad.71b5.ddf1 dmac:70d3.79be.ae61 <-- Matches next-hop
information to reach 192.168.1.4/32
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7f57c04da418, ri_id:0x3a phdl:0x5500005a, ref_cnt:1
    si:0x7f57c04da838, si_id:0x400c, di_id:0x62 <-- di_id utilized in subsequent

```

```

commands
    ADJ:objid:78 {link_type:MPLS ifnum:0x44, si:0xfa000029, }
    =====
    MPLS info: mpls_ecr_scale_prefix_adj:0x8f000039, mpls_lsps_hdl:0
    =====

```

C9500-P#**show platform hardware fed switch standby fwd-asic resource asic all destination-index range 0x62 0x62**

ASIC#0:

```

index = 0x62
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

```

```

index = 0x62
pmap = 0x00000000 0x00000002 <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000
0000 0000 0000 0010 = Port 1 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

```

C9500-P#**show platform hardware fed switch standby fwd-asic resource asic all destination-index range 0x2 0x2**

ASIC#0:

```

index = 0x2
pmap = 0x00000000 0x00008000 <-- Looking at 0x00008000, in binary that is 0000 0000 0000 0000
1000 0000 0000 0000 = Port 15 (Zero based, count right to left)

```

```

cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

index = 0x2
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

```

C9500-P#show platform software fed switch active ifm mappings

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
TenGigabitEthernet1/0/2	0x42	1	0	1	1	0	10	1	2	2	NIF	Y <--
Port 1 is an egress port, TenGi1/0/2												
TenGigabitEthernet1/0/16	0x18	0	0	0	15	0	8	11	16	2360	NIF	Y <--
Port 15 is the SVL												

C9500-P#show platform software fed switch standby ifm mappings

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
TenGigabitEthernet2/0/2	0x44	1	0	1	1	0	10	1	2	98	NIF	Y <--
Port 1 is an egress port, TenGi2/0/2												
TenGigabitEthernet2/0/16	0x33	0	0	0	15	0	8	11	16	2360	NIF	Y <--
Port 15 is the SVL												

C9300-PE-2 تائىدابلا نم ققحتلا

*****Software Prefix Programming*****

C9300-PE-2#show ip route vrf RED 192.168.2.0

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Last update from 10.0.0.22 on GigabitEthernet2/0/1, 21:35:22 ago

Routing Descriptor Blocks:

* 10.0.0.22, from 10.0.0.22, 21:35:22 ago, via GigabitEthernet2/0/1 <-- Next-hop to reach

192.168.2.0/24

Route metric is 130816, traffic share count is 1

Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit

Reliability 255/255, minimum MTU 1500 bytes

Loading 1/255, Hops 1

C9300-PE-2#show ip route vrf RED 10.0.0.22

Routing Table: RED

Routing entry for 10.0.0.20/30

Known via "connected", distance 0, metric 0 (connected, via interface)

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Routing Descriptor Blocks:

* directly connected, via GigabitEthernet2/0/1

Route metric is 0, traffic share count is 1

C9300-PE-2#show ip cef vrf RED 192.168.2.0/24 detail

192.168.2.0/24, epoch 0

QOS: Precedence routine (0)

dflt local label info: other/21 [0x2] <-- VPNv4 Label

nexthop 10.0.0.22 GigabitEthernet2/0/1

FMAN RP Prefix Programming

C9300-PE-2#show ip vrf detail

VRF RED (VRF Id = 2); default RD 69:69; default VPNID <-- VRF ID used in next command

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi2/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

C9300-PE-2#show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24 <-
- Use the VRF ID from previous command

Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_ADJACENCY	0x3a

C9300-PE-2#show platform software adjacency switch active r0 index 0x3a <-- Use the
OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x3a (58)

Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP

Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0 <-- MAC ending in C9C2 is the DMAC, MAC ending
in AE42 is SMAC, 0800 is IP ETYPE

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: no-l3-inject

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: 10.0.0.22 <-- Next-hop IP address

IP FRR MCP_ADJ_IPFRR_NONE 0

OM handle: 0x348062b578

FMAN FP Prefix Programming

C9300-PE-2#show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24
Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_ADJACENCY	0x3a

C9300-PE-2#show platform software adjacency switch active f0 index 0x3a <-- Use the
OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x3a (58)

Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP
Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0 <-- MAC ending in C9C2 is the DMAC, MAC ending
in AE42 is SMAC, 0800 is IP ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: no-l3-inject
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.22 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 477, HW handle: (nil) (created)

FED Prefix Programming

C9300-PE-2#show platform hardware fed switch active ip route vrf-name RED 192.168.2.0/24

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
modified							

2	192.168.2.0/24	0x7f0650a7e3e8	0x0	0	0		
---	----------------	----------------	-----	---	---	--	--

2021/06/23 18:46:56.801 <-- HTM value used in subsequent command

FIB: prefix_hdl:0x38000016, mpls_ecr_prefix_hdl:0
===== OCE chain =====
ADJ:objid:58 {link_type:IP ifnum:0x35, si:0x9700001b, IPv4: 10.0.0.22 } <-- objid
relevant in subsequent command, 10.0.0.22 is the next-hop IP

MPLS info: mpls_ecr_scale_prefix_adj:0, mpls_lsapa_hdl:0
=====

C9300-PE-2#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f0650a7e3e8 1 <-- Use the HTM value from previous command

Handle:0x7f0650a7e3e8 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-
ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f0650ba4028

Detailed Resource Information (ASIC# 0)

Number of HTM Entries: 1

Entry 0: (handle 0x7f0650ba4028)

Absolute Index: 92180

Time Stamp: 1

KEY - vrf:2 mtr:0 prefix:192.168.2.0 rcp_redirect_index:0x0

MASK - vrf:255 mtr:0 prefix:255.255.255.0 rcp_redirect_index:0x0

(SI value used later)

FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5
afdLabelOrDestClientId:0 SI:173 destined_to_us:0 hw_stats_idx:1 stats_id:0
redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0
SRC-AD = learning_violation:1 need_to_learn:1 locally_connected:0 staticentryViolation:0
rpfValid:1 rpfLe:37 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1
rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UserRpfmatchTable:0
rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,

sgtCacheControl0 = 0
port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0
group_label:0x0 group_mask:0x0

=====

C9300-PE-2#show platform software fed switch active ip adj
IPV4 Adj entries

dest	if_name	dst_mac	si_hdl	ri_hdl	pd_flags
adj_id	Last-modified				
----	-----	-----	-----	-----	-----
10.0.0.22	GigabitEthernet2/0/1	0072.78c8.c9c2	0x7f0650a32858	0x7f0650a1af48	0x0
0x3a	2021/06/23 18:46:52.956				

C9300-PE-2#show ip arp vrf RED 10.0.0.22

Protocol	Address	Age (min)	Hardware Addr	Type	Interface
Internet	10.0.0.22	131	0072.78c8.c9c2	ARPA	GigabitEthernet2/0/1

<-- dst_mac
matches the ARP entry

C9300-PE-2#show platform hardware fed fwd-asic abstraction print-resource-handle 0x7f0650a32858
1 <-- Use the HTM value from previous command

Handle:0x7f0650a32858 Res-Type:ASIC_RSC_SI Res-Switch-Num:255 Asic-Num:255 Feature-
ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1
priv_ri/priv_si Handle: 0x7f0650a1af48Hardware Indices/Handles: index0:0xad
mtu_index/l3u_ri_index0:0x0 index1:0xad mtu_index/l3u_ri_index1:0x0
Features sharing this resource:66 (1)
Cookie length: 56
00 00 00 00 00 00 00 00 25 00 00 00 00 00 00 00 00 00 00 00 08 00 00 72 78 c8 c9 c2 00 00 00 00
00 00

Detailed Resource Information (ASIC# 0)

Station Index (SI) [0xad]
RI = 0x18
DI = 0x5338
stationTableGenericLabel = 0
stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0
rcpServiceId = 0
dejaVuPreCheckEn = 0
Replication Bitmap: CD

Detailed Resource Information (ASIC# 1)

Station Index (SI) [0xad]
RI = 0x18
DI = 0x5338
stationTableGenericLabel = 0
stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0
rcpServiceId = 0
dejaVuPreCheckEn = 0
Replication Bitmap: LD

=====

C9300-PE-2#show platform hardware fed switch active fwd-asic resource asic all destination-index
range 0x5338 0x5338 <-- Use the DI value from previous command

ASIC#0:

```
index = 0x5338
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:
```

```
index = 0x5338
pmap = 0x00000000 0x00000001 <-- Looking at 0x00000001, in binary that is 0000 0000 0000 0000
0000 0000 0000 0001 = Port 0 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
```

C9300-PE-2#show platform software fed switch active ifm mappings

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
GigabitEthernet2/0/1	0x35	1	0	1	0	0	26	6	1	97	NIF	Y

- Port 0 is the egress port, Gi2/0/1

VPNv4 تاي مست ةج مرب

C9300-PE-1 و C9300-PE-2 MPLS PE، تاهجوم ىلع VPNv4 تاي مست ةج مرب ىل لالتل مسقلا ي طغي نم جارخا دجوي ال ىل لالتلاب و VPNv4 ةي مست ىلع هجوتلا ةءاب C9500=P موقى ال C9500-P.

C9300-PE-1 VPNv4 تاي مست ةج مرب:

روظنم نم ةقاطبلا نم ققحت. ةءىءبلا ةءابلا سىلو، PE ىل ةلحلملا ةءابلا نم ققحت FED م FMAN RP و FMAN FP ىل ةجار م.

Software VPNv4 Label Programming

C9300-PE-1#show ip cef vrf RED 192.168.3.0/24 detail

192.168.3.0/24, epoch 0

QOS: Precedence routine (0)

dflt local label info: other/21 [0x2] <-- VPNv4 label associated with the local prefix

nextHop 10.0.0.1 GigabitEthernet1/0/1

FMAN RP VPNv4 Label Programming

C9300-PE-1#show platform software mpls switch active r0 eos index 117 <-- Utilize the objid from the FED command

EOS Choice 0x75, Number of paths: 2
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
Next Object Index: 0,0x74
OM handle: 0x3480644470

FMAN FP VPNv4 Label Programming

C9300-PE-1#show platform software mpls switch active f0 eos index 117 <-- Utilize the objid from the FED command

EOS Choice 0x75, Number of paths: 2
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
Next Object Index: 0,0x74
aom id: 612, CPP handle: 0xdeadbeef (created), flags: 0

C9300-PE-1#show platform software object-manager switch active f0 object 612 <-- Use the aom id from previous command

Object identifier: 612
Description: EOS Choice 0x75
Status: Done, Epoch: 0, Client data: 0xe05e9318

C9300-PE-1#show platform software object-manager switch active f0 object 612 parents <-- Use the aom id from previous command

Object identifier: 7
Description: Special Object adj_drop
Status: Done

Object identifier: 611
Description: label 0x74
Status: Done

FED VPNv4 Label Programming

C9300-PE-1#show platform software fed switch active mpls forwarding label 21 detail

LENTRY:label:21 nobj:(EOS, 117) lentry_hdl:0x8b000009
modify_cnt:0 backwalk_cnt:0
lspa_handle:0
AAL: id:2332033033 lbl:21
eos0:[adj_hdl:0, hw_hdl:0x7fbae8d87428]
eos1:[adj_hdl:0x4300003b, hw_hdl:0x7fbae8d87278]
deagg_vrf_id = 0 lspa_handle:0
EOS:objid:117 local_label:0 flags:0:() pdflags:0 <-- Utilized in previous commands
nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 116) modify:0 bwalk:0
LABEL:objid:116 link_type:IP local_label:21 outlabel:(1048577, 0)
flags:0xc:(UHP,POP,) pdflags:0x2:(INSTALL_HW_OK,) adj_handle:0x4300003b
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:1124073531 lbl:0 smac:a0f8.4911.d1e4 dmac:0072.78c8.06e4
sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)
vlan_id:0 vrf_id:0 ri:0x7fbae8d811b8, ri_id:0x3e phdl:0xf1000024, ref_cnt:1
si:0x7fbae8d72078, si_id:0x4012, di_id:0x5338
ADJ:objid:58 {link_type:IP ifnum:0x35, si:0x1900001b, IPv4: 10.0.0.1 }

C9300-PE-2 VPNv4 تاي م س ت نم ق ق ح ت ل ل

روظنم نم ة ق اط ب ل ل نم ق ق ح ت . ة د ي ع ب ل ل ة د اب ل ل س ي ل و ، PE ل ل ة ل ح م ل ل ة د اب ل ل نم ق ق ح ت
FED م ت و FMAN RP ل ل ع ج ا ر م ت FMAN FP.

C9300-PE-2#show ip cef vrf RED 192.168.2.0/24 detail

192.168.2.0/24, epoch 0

QOS: Precedence routine (0)

dflt local label info: other/21 [0x2] <-- VPNv4 label associated with the local prefix

nexthop 10.0.0.22 GigabitEthernet2/0/1

C9300-PE-2#show platform software mpls switch active r0 eos index 118 <-- Utilize the objid value from the FED command

EOS Choice 0x76, Number of paths: 2

Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL

Next Object Index: 0,0x75

OM handle: 0x34806402d0

C9300-PE-2#show platform software mpls switch active f0 eos index 118 <-- Utilize the objid value from the FED command

EOS Choice 0x76, Number of paths: 2

Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL

Next Object Index: 0,0x75

aom id: 589, CPP handle: 0xdeadbeef (created), flags: 0

C9300-PE-2#show platform software object-manager switch active f0 object 589 <-- Utilize the aom id from the previous command

Object identifier: 589

Description: EOS Choice 0x76

Status: Done, Epoch: 0, Client data: 0x248cac8

C9300-PE-2#show platform software object-manager switch active f0 object 589 parents <-- Utilize the aom id from the previous command

Object identifier: 7

Description: Special Object adj_drop

Status: Done

Object identifier: 588

Description: label 0x75

Status: Done

C9300-PE-2#show platform software fed switch active mpls forwarding label 21 detail

LENTRY:label:21 nobj:(EOS, 118) lentry_hdl:0x63000009

modify_cnt:0 backwalk_cnt:0

lspa_handle:0

AAL: id:1660944393 lbl:21

eos0:[adj_hdl:0, hw_hdl:0x7f0650a40408]

eos1:[adj_hdl:0xcb00003a, hw_hdl:0x7f0650a401f8]

deagg_vrf_id = 0 lspa_handle:0

EOS:objid:118 local_label:0 flags:0:() pdflags:0

nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 117) modify:0 bwalk:0

LABEL:objid:117 link_type:IP local_label:21 outlabel:(1048577, 0)

flags:0xc:(UHP,POP,) pdflags:0x2:(INSTALL_HW_OK,) adj_handle:0xcb00003a

unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:3405774906 lbl:0 smac:70d3.79be.ae42 dmac:0072.78c8.c9c2

sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)

vlan_id:0 vrf_id:0 ri:0x7f0650a3f2a8, ri_id:0x48 phdl:0xf1000024, ref_cnt:1

si:0x7f0650a3d5e8, si_id:0x400a, di_id:0x5338

ADJ:objid:58 {link_type:IP ifnum:0x35, si:0x9700001b, IPv4: 10.0.0.22 }

Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 598, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software mpl s switch active f0 label index 111 <-- Use the objid value from the FED commands

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 599, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software object-manager switch active f0 object 598 <-- Utilize the aom id from previous commands

Object identifier: 598
Description: label 0x6e
Status: Done, Epoch: 0, Client data: 0xe05e6d78

C9300-PE-1#show platform software object-manager switch active f0 object 598 parents <-- Utilize the aom id from previous commands

Object identifier: 531
Description: adj 0x4b, Flags None
Status: Done

C9300-PE-1#show platform software object-manager switch active f0 object 599 <-- Utilize the aom id from previous commands

Object identifier: 599
Description: label 0x6f
Status: Done, Epoch: 0, Client data: 0xe05e6f78

C9300-PE-1#show platform software object-manager switch active f0 object 599 parents <-- Utilize the aom id from previous commands

Object identifier: 535
Description: adj 0x4e, Flags None
Status: Done

C9300-PE-1#show platform software fed switch active mpl s forwarding label 19 detail

LENTRY:label:19 nobj:(LB, 112) lentry_hdl:0x9000007
modify_cnt:1 backwalk_cnt:0
lspa_handle:0
AAL: id:150994951 lbl:19
eos0:[adj_hdl:0x7d000002, hw_hdl:0x7fbae8d778b8]
eos1:[adj_hdl:0x7d000002, hw_hdl:0x7fbae8d776a8]
deagg_vrf_id = 0 lspa_handle:0
LB:obj_id:112 link_type:IP num_choices:2 Flags:0
mpls_ecr:1 local_label:19 path_inhw:2 ecrh:0x7d000002 old_ecrh:0
modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
bwalk:[req:0 in_prog:0 nested:0]
AAL: ecr:id:2097152002 af:0 ecr_type:0 ref:7 ecrh:0x7fbae8a99268(28:2)
hwhdl:3903427176 ::0x7fbae8a98b98,0x7fbae8a9ad48,0x7fbae8a98b98,0x7fbae8a9ad48
Sw Enh ECR scale: objid:112 llabel:19 eos:1 #adjs:2 mixed_adj:0
reprogram_hw:0 ecrhdl:0x7d000002 ecr_hwhdl:0x7fbae8a99268
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:4278190135 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:1744830509
sih:0x7fbae8a98b98(179) di_id:20499 rih:0x7fbae8a985d8(33)
adj_lentry [eos0:0x7fbae8d7bf48 eos1:0x7fbae8d76e88]
ecr_adj: id:1392508984 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:2013265966
sih:0x7fbae8a9ad48(180) di_id:20499 rih:0x7fbae8a9a788(46)

```

adj_lentry [eos0:0x7fbae8d7c1b8 eos1:0x7fbae8d77158]
ecr_prefix_adj: id:2164260921 (ref:1)
  sih:0x7fbae8d7df08(181) di_id:20499 rih:0x7fbae8d7db98(68)
LABEL:objid:110 link_type:MPLS local_label:19 outlabel:(17, 0) <-- Used in previous
commands
  flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0xff000037
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:4278190135 lbl:0 smac:a0f8.4911.d1d6 dmac:d4ad.71b5.dde4
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7fbae8d78c48, ri_id:0x40 phdl:0x9f00004b, ref_cnt:1
    si:0x7fbae8d78fd8, si_id:0x4013, di_id:0x535f
  ADJ:objid:75 {link_type:MPLS ifnum:0x36, si:0x22000023, }
  LABEL:objid:111 link_type:MPLS local_label:19 outlabel:(17, 0) <-- Used in previous
commands
  flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0x53000038
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:1392508984 lbl:0 smac:a0f8.4911.d1d8 dmac:d4ad.71b5.ddc2
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7fbae8d7d0a8, ri_id:0x42 phdl:0x8400004c, ref_cnt:1
    si:0x7fbae8d7a908, si_id:0x4014, di_id:0x5360
  ADJ:objid:78 {link_type:MPLS ifnum:0x37, si:0x74000026, }

```

تاي م س ت ة ج م ر ب LDP C9500-P:

نم ق ق ح ت الو ، دي عب ل ال PE ل اهنع ن ال عال م تي يت ل ال ة ل ح م ل ال LDP ة ي م س ت ة ح ص ن م ق ق ح ت ل ال و FMAN RP ل ال ع ج ا ر م ث FED ر و ط ن م ن م ة ق ا ط ب ل ال ن م ق ق ح ت . ة دي عب ل ال LDP ة ي م س ت ة ح ص FMAN FP.

Software LDP Label Programming

C9500-P#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop	
16	explicit-n	192.168.1.2/32	1240	Te1/0/1	10.0.0.5	<-- LDP Label 16
advertised to reach PE 192.168.1.2						
	explicit-n	192.168.1.2/32	226537	Te2/0/1	10.0.0.9	
17	explicit-n	192.168.1.4/32	610	Te1/0/2	10.0.0.14	<-- LDP Label 17
advertised to reach PE 192.168.1.4						
	explicit-n	192.168.1.4/32	227592	Te2/0/2	10.0.0.18	

FMAN RP LDP Label Programming

C9500-P#show platform software mpls switch active r0 label index 94

```

Label OCE 0x5e -> OBJ_ADJACENCY (0x3f)
  Flags: Real, Number of labels in the OCE: 1
  Label values: 0
  Backup flags: Pop, UHP, backup label 0x100001
  OM handle: 0x348064c530

```

C9500-P#show platform software mpls switch active r0 label index 95

```

Label OCE 0x5f -> OBJ_ADJACENCY (0x44)
  Flags: Real, Number of labels in the OCE: 1
  Label values: 0
  Backup flags: Pop, UHP, backup label 0x100001
  OM handle: 0x348064c6c8

```

C9500-P#show platform software mpls switch active r0 label index 104

Label OCE 0x68 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064df70

C9500-P#show platform software mpls switch active r0 label index 105

Label OCE 0x69 -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064e108

*****FMAN FP LDP Label Programming*****

C9500-P#show platform software mpls switch active f0 label index 94

Label OCE 0x5e -> OBJ_ADJACENCY (0x3f)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 564, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 95

Label OCE 0x5f -> OBJ_ADJACENCY (0x44)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 565, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 104

Label OCE 0x68 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 576, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 105

Label OCE 0x69 -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 577, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software object-manager switch active f0 object 564

Object identifier: 564
Description: label 0x5e
Status: Done, Epoch: 0, Client data: 0x4f737108

C9500-P#show platform software object-manager switch active f0 object 564 parents

Object identifier: 515
Description: adj 0x3f, Flags None

Status: Done

C9500-P#show platform software object-manager switch active f0 object 565

Object identifier: 565

Description: label 0x5f

Status: Done, Epoch: 0, Client data: 0x4f737448

C9500-P#show platform software object-manager switch active f0 object 565 parents

Object identifier: 525

Description: adj 0x44, Flags None

Status: Done

C9500-P#show platform software object-manager switch active f0 object 576

Object identifier: 576

Description: label 0x68

Status: Done, Epoch: 0, Client data: 0x4f6d4bf8

C9500-P#show platform software object-manager switch active f0 object 576 parents

Object identifier: 536

Description: adj 0x49, Flags None

Status: Done

C9500-P#show platform software object-manager switch active f0 object 577

Object identifier: 577

Description: label 0x69

Status: Done, Epoch: 0, Client data: 0x4f737f78

C9500-P#show platform software object-manager switch active f0 object 577 parents

Object identifier: 545

Description: adj 0x4e, Flags None

Status: Done

FED LDP Label Programming

C9500-P#show platform software fed switch active mpls forwarding label 16 detail

LENTRY:label:16 nobj:(LB, 96) lentry_hdl:0xeb000004

modify_cnt:2 backwalk_cnt:0

lspa_handle:0

AAL: id:3942645764 lbl:16

eos0:[adj_hdl:0x44000002, hw_hdl:0x7f0b284b4d98]

eos1:[adj_hdl:0x44000002, hw_hdl:0x7f0b284b4be8]

deagg_vrf_id = 0 lspa_handle:0

LB:obj_id:96 link_type:IP num_choices:2 Flags:0

mpls_ecr:1 local_label:16 path_inhw:2 ecrh:0x44000002 old_ecrh:0

modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0

bwalk:[req:0 in_prog:0 nested:0]

AAL: ecr:id:1140850690 af:0 ecr_type:0 ref:2 ecrh:0x7f0b284a3998(28:2)

hwhdl:675953048 ::0x7f0b284b4268,0x7f0b284a1d78,0x7f0b284b4268,0x7f0b284a1d78

Sw Enh ECR scale: objid:96 llabel:16 eos:1 #adjs:2 mixed_adj:0

reprogram_hw:0 ecrhdl:0x44000002 ecr_hwhdl:0x7f0b284a3998

mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0

ecr_adj: id:1610612787 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:1207959601

sih:0x7f0b284b4268(181) di_id:23709 rih:0x7f0b284b3ca8(31)

adj_lentry [eos0:0x7f0b284a32d8 eos1:0x7f0b284a3cc8]

ecr_adj: id:805306420 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:67108914

sih:0x7f0b284a1d78(182) di_id:23709 rih:0x7f0b284b47d8(44)

adj_lentry [eos0:0x7f0b284c1608 eos1:0x7f0b284a2138]

ecr_prefix_adj: id:3976200245 (ref:1)

sih:0x7f0b284c2bf8(183) di_id:23709 rih:0x7f0b284c2888(50)

LABEL:objid:94 link_type:MPLS local_label:16 outlabel:(0, 0)

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x60000033

```
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:1610612787 lbl:0 smac:d4ad.71b5.dde4 dmac:a0f8.4911.d1d6
  sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
  vlan_id:0 vrf_id:0 ri:0x7f0b284a2cd8, ri_id:0x2e phdl:0xe9000057, ref_cnt:1
  si:0x7f0b284a3048, si_id:0x4009, di_id:0x1
ADJ:objid:63 {link_type:MPLS ifnum:0x41, si:0x2d000023, }
LABEL:objid:95 link_type:MPLS local_label:16 outlabel:(0, 0)
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x30000034
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:805306420 lbl:0 smac:d4ad.71b5.ddc2 dmac:a0f8.4911.d1d8
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7f0b284a57c8, ri_id:0x30 phdl:0x67000059, ref_cnt:1
    si:0x7f0b284a6008, si_id:0x400a, di_id:0x61
  ADJ:objid:68 {link_type:MPLS ifnum:0x43, si:0xef000026, }
```

C9500-P#show platform software fed switch active mpls forwarding label 17 detail

```
LENTRY:label:17 nobj:(LB, 106) lentry_hdl:0xf6000005
  modify_cnt:1 backwalk_cnt:0
  lsp_handle:0
  AAL: id:4127195141 lbl:17
    eos0:[adj_hdl:0x44000002, hw_hdl:0x7f0b284ce2f8]
    eos1:[adj_hdl:0x44000002, hw_hdl:0x7f0b284ce0e8]
    deagg_vrf_id = 0 lsp_handle:0
  LB:obj_id:106 link_type:IP num_choices:2 Flags:0
    mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0x44000002 old_ecrh:0
    modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
    bwalk:[req:0 in_prog:0 nested:0]
    AAL: ecr:id:1140850690 af:0 ecr_type:0 ref:2 ecrh:0x7f0b284a3998(28:2)
    hwhdl:675953048 ::0x7f0b284b4268,0x7f0b284a1d78,0x7f0b284b4268,0x7f0b284a1d78
  Sw Enh ECR scale: objid:106 llabel:17 eos:1 #adjs:2 mixed_adj:0
  reprogram_hw:0 ecrhdl:0x44000002 ecr_hwhdl:0x7f0b284a3998
  mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
  ecr_adj: id:4127195192 is_mpls_adj:1 l3adj_flags:0x100000
    recirc_adj_id:1207959601
    sih:0x7f0b284b4268(181) di_id:23709 rih:0x7f0b284b3ca8(31)
    adj_lentry [eos0:0x7f0b284c38e8 eos1:0x7f0b284cd858]
  ecr_adj: id:1157627961 is_mpls_adj:1 l3adj_flags:0x100000
    recirc_adj_id:67108914
    sih:0x7f0b284a1d78(182) di_id:23709 rih:0x7f0b284b47d8(44)
    adj_lentry [eos0:0x7f0b284c3af8 eos1:0x7f0b284cdb28]
  ecr_prefix_adj: id:3707764794 (ref:1)
    sih:0x7f0b284c5028(184) di_id:23709 rih:0x7f0b284c4c48(60)
  LABEL:objid:104 link_type:MPLS local_label:17 outlabel:(0, 0)
    flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xf6000038
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:4127195192 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71
      sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
      vlan_id:0 vrf_id:0 ri:0x7f0b284ceaa8, ri_id:0x38 phdl:0x76000058, ref_cnt:1
      si:0x7f0b284ceeb8, si_id:0x400b, di_id:0x2
    ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x1f000028, }
  LABEL:objid:105 link_type:MPLS local_label:17 outlabel:(0, 0)
    flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x45000039
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:1157627961 lbl:0 smac:d4ad.71b5.ddf1 dmac:70d3.79be.ae61
      sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
      vlan_id:0 vrf_id:0 ri:0x7f0b284c4588, ri_id:0x3a phdl:0x5500005a, ref_cnt:1
      si:0x7f0b284d0548, si_id:0x400c, di_id:0x62
    ADJ:objid:78 {link_type:MPLS ifnum:0x44, si:0x4900002a, }
```

C9300-PE-2 LDP تاي مست ة حمر ب

نم ققحت الو، دي عب ال PE ل اهنع نال عال م تي يتي ل ال ة ل حم ال LDP ة ي مست ة حص نم ققحت ال
ل ال دادت ال اب مق م ث FED روظنم نم ة قاطب ال نم ققحت ال اب ادبا. ة دي عب ال LDP ة ي مست ة حص
FMAN RP و FMAN FP.

Software LDP Label Programming

C9300-PE-2#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0	Gi2/0/2	10.0.0.13
	Pop Label	192.168.1.3/32	0	Gi2/0/3	10.0.0.17
17	16	192.168.1.2/32	0	Gi2/0/2	10.0.0.13 <-- LDP Label 17 is advertised to Remote PE 192.168.1.2
	16	192.168.1.2/32	0	Gi2/0/3	10.0.0.17
18	Pop Label	10.0.0.4/30	0	Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.4/30	0	Gi2/0/3	10.0.0.17
19	Pop Label	10.0.0.8/30	0	Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.8/30	0	Gi2/0/3	10.0.0.17
20	No Label	10.0.0.20/30[V]	630	aggregate/RED	
21	No Label	192.168.2.0/24[V]	\		
			0	Gi2/0/1	10.0.0.22

FMAN RP Label Programming

C9300-PE-2#show platform software mpls switch active r0 label index 106 <-- Use the objid values from the FED commands

Label OCE 0x6a -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480637358

C9300-PE-2#show platform software mpls switch active r0 label index 107 <-- Use the objid values from the FED commands

Label OCE 0x6b -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480638c10

FMAN FP LDP Label Programming

C9300-PE-2#show platform software mpls switch active f0 label index 106

Label OCE 0x6a -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
aom id: 548, CPP handle: 0xdeadbeef (created)

C9300-PE-2#show platform software mpls switch active f0 label index 107

Label OCE 0x6b -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001

aom id: 549, CPP handle: 0xdeadbeef (created)

C9300-PE-2#show platform software object-manager switch active f0 object 548 <-- Use the aom id value from the previous commands

Object identifier: 548

Description: label 0x6a

Status: Done, Epoch: 0, Client data: 0x24843d8

C9300-PE-2#show platform software object-manager switch active f0 object 548 parents <-- Use the aom id value from the previous commands

Object identifier: 509

Description: adj 0x4b, Flags None

Status: Done

C9300-PE-2#show platform software object-manager switch active f0 object 549 <-- Use the aom id value from the previous commands

Object identifier: 549

Description: label 0x6b

Status: Done, Epoch: 0, Client data: 0x2484518

C9300-PE-2#show platform software object-manager switch active f0 object 549 parents <-- Use the aom id value from the previous commands

Object identifier: 513

Description: adj 0x4e, Flags None

Status: Done

FED LDP Label Programming

C9300-PE-2#show platform software fed switch active mpls forwarding label 17 detail

LENTRY:label:17 nobj:(LB, 108) lentry_hdl:0x64000005

modify_cnt:1 backwalk_cnt:0

lspa_handle:0

AAL: id:1677721605 lbl:17

eos0:[adj_hdl:0xa0000002, hw_hdl:0x7f0650a5c8e8]

eos1:[adj_hdl:0xa0000002, hw_hdl:0x7f0650a5b908]

deagg_vrf_id = 0 lspa_handle:0

LB:obj_id:108 link_type:IP num_choices:2 Flags:0

mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0xa0000002 old_ecrh:0

modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0

bwalk:[req:0 in_prog:0 nested:0]

AAL: ecr:id:2684354562 af:0 ecr_type:0 ref:7 ecrh:0x7f0650a62888(28:2)

hwhdl:1353066632 ::0x7f0650a60998,0x7f0650a630d8,0x7f0650a60998,0x7f0650a630d8

Sw Enh ECR scale: objid:108 llabel:17 eos:1 #adjs:2 mixed_adj:0

reprogram_hw:0 ecrhdl:0xa0000002 ecr_hwhdl:0x7f0650a62888

mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0

ecr_adj: id:436207667 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:2113929262

sih:0x7f0650a60998(178) di_id:20507 rih:0x7f0650a60378(50)

adj_lentry [eos0:0x7f0650a877d8 eos1:0x7f0650a1cf78]

ecr_adj: id:3976200246 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:1509949487

sih:0x7f0650a630d8(179) di_id:20507 rih:0x7f0650a62b18(51)

adj_lentry [eos0:0x7f0650a87a48 eos1:0x7f0650a1d188]

ecr_prefix_adj: id:2919235640 (ref:1)

sih:0x7f0650a87558(180) di_id:20507 rih:0x7f0650a871d8(68)

LABEL:objid:106 link_type:MPLS local_label:17 outlabel:(16, 0) <-- Used in previous commands

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x1a000033

unsupported_recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:436207667 lbl:0 smac:70d3.79be.ae71 dmac:d4ad.71b5.ddd6

sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)

vlan_id:0 vrf_id:0 ri:0x7f0650a67d48, ri_id:0x3a phdl:0x9f00004b, ref_cnt:1

si:0x7f0650a65408, si_id:0x4010, di_id:0x535f

```
ADJ:objid:75 {link_type:MPLS ifnum:0x36, si:0x35000023, }
LABEL:objid:107 link_type:MPLS local_label:17 outlabel:(16, 0) <-- Used in previous
```

commands

```
flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0xed000036
unsupported_recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3976200246 lbl:0 smac:70d3.79be.ae61 dmac:d4ad.71b5.ddf1
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7f0650a6f4f8, ri_id:0x40 phdl:0x8400004c, ref_cnt:1
si:0x7f0650a73088, si_id:0x4013, di_id:0x5360
ADJ:objid:78 {link_type:MPLS ifnum:0x37, si:0xa2000025, }
```

اهال صا ؤزه جال ريوطت ااطخا فاشكتسا

اهال صا ؤنيوكتلا ااطخا فاشكتسا ال اهم ادختسا كنكمي تامولعم مسقلا اذه رفوي

ؤزه جال MPLS ؤمظنا

ماظنلا ؤطسا وب SYSLOG ؤلا سرعاشن ا متي، MPLS تايمست لثم، نيني عم دروم نم تذفن اذا

اهركذت بجي ؤيسيئر طاقن

- دروملا اذه كالهتسا متي). ؤيمست لل يئاهن لل ري صم لل MPLS ؤيمست مادختسا متي (ي ل حمل CE نم تائ دابل ملعت دنع
- نم تائ دابل ملعت دنع دروملا اذه كالهتسا متي). ؤيمست لل صرف ل SPA ل مادختسا متي (دي ب PE

MPLS ل جسا ؤلا سر

فيريكتلا

دادرتسا ال اارج

%FED_L3_ERRMSG-3-RSRC_ERR: صي صخت ل ش ف FED: R0/0: 1 ل و حمل ال كالهتسا ب بسب FIB ل ا خ دال ؤزه جال دروم ؤزه جال دراوم

ؤزه جال ؤحاسم تذفن دقل IP تائ دابل ؤز و حمل ال (EM و TCAM)

ي ل قتل تاءارج ال هذه دحا ذختا فيريكتلا متي تائ دابل ال ي ع ب ال و ا ي ل حمل ال PE ل بق نم CE ي ف تائ دابل صي خلت. 1. سستال ع يزوت عضو ري يغت. 2. vrf لك ال ؤئ داب لك نم ي ل قتل تاءارج ال هذه دحا ذختا PE ي ف ني مدختسا ال لامع ال ي: CE ي ف تائ دابل صي خلت. 1. ي ل حمل ال PE و ا ي ل حمل ال سستال ع يزوت عضو ري يغت. 2. F ي ف vrf لك ال ؤئ داب لك نم ي ل حمل ال ي ل قتل تاءارج ال هذه دحا ذختا PE ي ف ني مدختسا ال لامع ال ي:

%FED_L3_ERRMSG-3-mpls_out_of_resource: R0/0: 1 ل و حمل ال MPLS. ؤيمست ل ا خ دال: ؤرف و تمل دراوملا 8205: ؤي ل حمل ال ؤيمست ال ؤجر ب ل ش ف (8192/8192) ي ف ؤزه جال

ؤيمست ال صي صخت ؤحاسم ال تذفن: ؤي ل حمل ال (EM و TCAM) نم ؤزه جال ال تايمست لل ؤز و حمل ال ي ل و ح ت ل ال ؤصا خ ال ؤي ل حمل ال (MPLS) تال و ك و ت و ر ب ال ددعت م

CE ي ف تائ دابل صي خلت. 1. ي ل حمل ال PE و ا ي ل حمل ال سستال ع يزوت عضو ري يغت. 2. F ي ف vrf لك ال ؤئ داب لك نم ي ل حمل ال ي ل قتل تاءارج ال هذه دحا ذختا PE ي ف ني مدختسا ال لامع ال ي: CE ي ف تائ دابل صي خلت. 1. ي ل حمل ال PE و ا ي ل حمل ال سستال ع يزوت عضو ري يغت. 2. F ي ف vrf لك ال ؤئ داب لك نم ي ل حمل ال ي ل قتل تاءارج ال هذه دحا ذختا PE ي ف ني مدختسا ال لامع ال ي:

%FED_L3_ERRMSG-3-MPLS_LENTRY_PAUSE: R0/0: 1 ل و حمل ال FED: ه ل ل ل و ص و ل ال مت ي ذل جرح ال دحل درومل فاق ي ا مت MPLS. ؤيمست ل ا خ دال درومل ا ت ق و م Lentry عاشن ا.

ؤيمست ال صي صخت تذفن دقل: ؤي ل حمل ال (EM و TCAM) نم ؤزه جال ال تايمست لل ؤز و حمل ال MPLS ب ؤصا خ ال ؤي ل حمل ال

%FED_L3_ERRMSG-3-mpls_out_of_resource: R0/0: 1 ل و حمل ال FED: ل ش ف MPLS SPA ل درومل ج راخ

دع ب نع ؤيمست ال صي صخت: ؤح ا ت م ال ؤحاسم ال تذفن ؤز و حمل ال ؤزه جال ال

ي ل قتل تاءارج ال هذه دحا ذختا PE ي ف ني مدختسا ال لامع ال ي: دي ب ال

1. CE في تائدابلا صيخلت
 دي عبال PE أو دي عبال
 سائل عيزوت عضو ريغت 2. LSPA ل دي عبال تاي مستلل
 صل ع vrf لك إلى تئداب لك نم
 دي عبال

زاهجلا في جم انربلا


زهجالا عحص نم ققحتلا رماو

ثحبلا ديرت ناكم لوأ وه UseCommand tcam دروم `show platform hardware fed active fwd-asic` عبال ASIC. زهجالا قاطن في قلكشم كيدل تناك اذا ام ميريقتل هنع

عحصوملا تامل عمل مادختساب VRF MPLS في BGP نم PE ملعت تائداب مسقلا اذه حصوي انه:

- يضارتفال تئداب لك لة ميستلل عيزوت مادختسا متي
- PE وه C9300-48U عم Cisco IOS-XE 17.3.4
- VRF MPLS في هجاو إلى تائدابلا نع نلعي يذلا BGP راجك Ixia وه CE
- لاوطأل TCAM يساسألا ماظنلا مدختسي، يلاتلابو. /28 وه مدختسملا تئدابلا لوط
 رصقألا أو /31 تئدابلا
- TCAM إلى زواجتي م، الو MPLS/BGP تاي مستلل EM ةركا يساسألا ماظنلا اذه مدختسي
 ائلتمم EM حبصأ اذا

ايجولوبوط

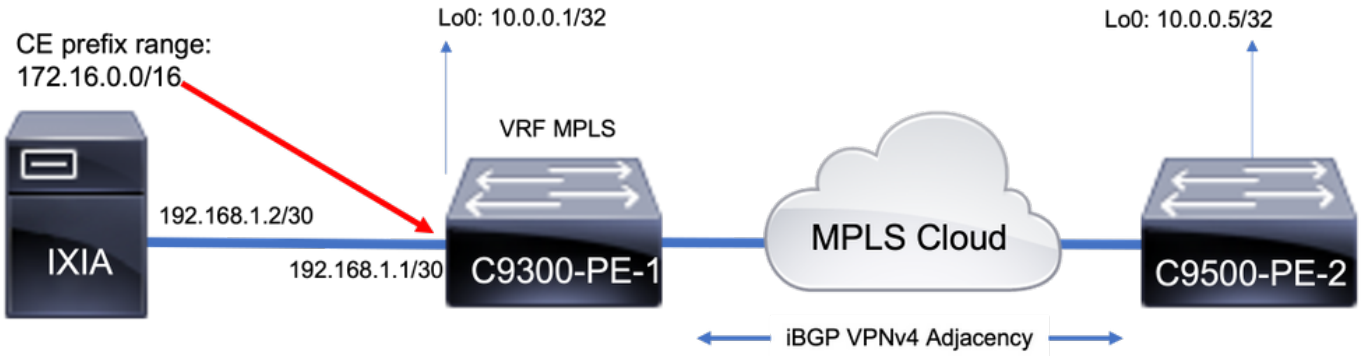

يساسألا دروملا مادختسا

يساسألا مادختسالا ضعب كانه، تئداب يا ةفاضلا لبق:

- ريغ ةيمانلا نادلبلا نم ةرواجملا نادلبلا ليكشت دعب يساسألا طخللا اذه ذخأ مت دقو
 يملع لودج في لايرتنوم لوكوتوربب ةلومشملا ةيلحاسلا
- VRF MPLS في VPNv4 تئداب ةفاضلا متت، سساسألا اذه نم
- صل لع فللاب جمربم وه ام صل ع دم تعي. كب ةصاخلا سساسألا ماقراً فلتخت نأ نكمي
 حاتفملا

لثم دراوم هنع جتنني امم، CE-PE بناج نم تئدابلا ةفاضلا متت، لاثملا اذه في: **عظحالم**
 سذكم مادختسا إلى جاتحي يذلا دي عبال PE صل ع طوقف اهصي صخت متي يتلا LSPA
 صصي صخت متي س، يقي قحلا ملعلا تاهوي رانيس في. لوصول ةيلبلا قلا تاي مست
 PE. يزاهج نم لك صل ع دروملا

C9300-48U#show platform hardware fed switch active fwd-asic resource tcam utilization
Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS	
Other									

20	Mac Address Table	EM	I	32768	20	0.06%	0	0	0
21	Mac Address Table	TCAM	I	1024	21	2.05%	0	0	0
0	L3 Multicast	EM	I	8192	0	0.00%	0	0	0
0	L3 Multicast	TCAM	I	512	9	1.76%	3	6	0
0	L2 Multicast	EM	I	8192	0	0.00%	0	0	0
0	L2 Multicast	TCAM	I	512	11	2.15%	3	8	0
0	IP Route Table	EM	I	24576	23	0.09%	14	0	9
0	<-- 23 EM (hash) base usage								
1	IP Route Table	TCAM	I	8192	25	0.31%	12	10	2
1	<-- 25 TCAM base usage								

C9300-48U#show platform software fed switch active mpls summary | b Resource shar

Resource sharing info:

SI: 4/65536
RI: 10/65536
Well Known Index: 49/2048
Tcam: 21/57344
lv1_ecr: 0/64
lv2_ecr: 0/256
lspa: 0/16385
label_stack_id: 2/65537
vpn_spoke_id: 0/255
indirect_si: 0/255

RSM resource database stats:

Num of (L3+mpls) ADJ entries allocated: 36/131072

Num of LABEL entries allocated: 4/8192 <-- Baseline label usage = 4 (label entries allocated on local PE-CE side)

Num of LSPA entries allocated: 0/8192 <-- LSPA resource used when prefix learnt from another PE, not from a local CE (The SDM template determines max value)

Num of local adjs in mpls adjs: 3
Num of SI stats allocated: 6/49152
Adjs stats allocated by MPLS:
Num of mpls adjs: 11
Num of L3 adjs: 0
Num of VPN prefix_id: 0
<...snip...>

Other MPLS resource alloc error stats: <-- reported resource allocation issues shown here

LENTY out-of-resource errors: 0
LENTY general errors: 0
LSPA out-of-resource errors: 0
LSPA general errors: 0
ADJ out-of-resource errors: 0
SI stats alloc error: 0
MPLS ADJ stats error: 0
MPLS ADJ stats last error rc: 0

كلذى إلى اموةهوجلولا ذفنموةمزلال ةباتك ةداعإل ةبولطم دراوم يه SI/RI/DI: ةظحال
 مهف ةلاقملا عجار، اءال صإو SI/DI/RI لوجملاب ةقلعتملا تالكشملا ءاطخأ فاشكك تسال
[Catalyst 9000 تالوجم لىلع ةزهجالا دراوم](#)

إفاضا 1000 BGP VPNv4 تائداب ةفاضل

CE نم VRF MPLS لىل ةفاضم تائداب 1000 عم (Ixia) رواجملا بلج

9300 PE لىل (CE ب لصتم)

```
C9300-48U#show bgp vpnv4 unicast all summary
BGP router identifier 10.0.0.1, local AS number 65000
<...snip...> Neighbor V AS MsgRcvd MsgSent TblVer InQ OutQ Up/Down State/PfxRcd 10.0.0.5 4 65000
102 304 3001 0 0 01:28:23 0 192.168.1.2 4 65005 102 5 3001 0 0
00:00:58 1000 <-- PE learns 1000 prefixes from CE device
C9300-48U#show bgp vpnv4 unicast all | count /28
Number of lines which match regexp = 1000 <-- All 1000 prefixes are /28
C9300-48U#show platform hardware fed switch active fwd-asic resource tcam utilization
Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable
```

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

Mac Address Table	EM	I	32768	20	0.06%	0	0	0
20								
Mac Address Table	TCAM	I	1024	21	2.05%	0	0	0
21								
L3 Multicast	EM	I	8192	0	0.00%	0	0	0
0								
L3 Multicast	TCAM	I	512	9	1.76%	3	6	0
0								
L2 Multicast	EM	I	8192	0	0.00%	0	0	0
0								
L2 Multicast	TCAM	I	512	11	2.15%	3	8	0
0								
IP Route Table	EM	I	24576	2023	8.23%	14	0	2009
0								
IP Route Table	TCAM	I	8192	1025	12.51%	1012	10	2
1								

```
<-- 25 base + 1000 /28 prefixes = 1025 TCAM entries
<-- MPLS labels are added to EM, and each MPLS label uses 2 entries (one IPv4 prefix, and one
MPLS label results in 3 entries used in hardware)
```

```
C9300-48U#show platform software fed switch active mpls summary | b Resource shar
Resource sharing info:
SI: 4/65536
RI: 1010/65536
Well Known Index: 49/2048
Tcam: 1021/57344
lv1_ecr: 0/64
lv2_ecr: 0/256
lspa: 0/16385
label_stack_id: 1002/65537
vpn_spoke_id: 0/255
indirect_si: 0/255
RSM resource database stats:
Num of (L3+mpls) ADJ entries allocated: 1036/131072
```

```

    Num of LABEL entries allocated: 1004/8192          <-- Increased by 1000 on local PE
    Num of LSPA entries allocated: 0/8192             <-- No prefixes learnt from remote
PE, no LSPA allocated
  Num of local adjs in mpls adjs: 3
  Num of SI stats allocated: 1006/49152
  Adjs stats allocated by MPLS:
  Num of mpls adjs: 1011
    Num of L3 adjs: 0
  Num of VPN prefix_id: 0

```

<...snip...>

Other MPLS resource alloc error stats: <-- no resource allocation issues

```

  LENTRY out-of-resource errors: 0
  LENTRY general errors: 0
  LSPA out-of-resource errors: 0
  LSPA general errors: 0
  ADJ out-of-resource errors: 0
  SI stats alloc error: 0
  MPLS ADJ stats error: 0
  MPLS ADJ stats last error rc: 0

```

<-- Resources shown in baseline outputs are now increased by 1000

9500H Remote PE (MPLS) تالوكوت وربال ددعتم لي وحتال ربع هي لع فرع تال م (MPLS))

C9500-24Y4C#show platform hardware fed active fwd-asic resource tcam utilization

Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

Mac Address Table	EM	I	32768	19	0.06%	0	0	0
19								
Mac Address Table	TCAM	I	768	21	2.73%	0	0	0
21								
L3 Multicast	EM	I	32768	0	0.00%	0	0	0
0								
L3 Multicast	TCAM	I	768	6	0.78%	3	3	0
0								
L2 Multicast	TCAM	I	2304	7	0.30%	3	4	0
0								
IP Route Table	EM/LPM	I	212992	1012	0.48%	1003	0	9
0								
IP Route Table	TCAM	I	1536	28	1.82%	23	3	2
0								
CTS Cell Matrix/VPN								
Label	EM	O	32768	992	3.03%	0	0	992
0								
<-- MPLS VPN used 992 entries								
CTS Cell Matrix/VPN								
Label TCAM 0 768 9 1.17% 0 0 8 1								

<-- 1000 /28 IPv4 prefixes learned from remote PE (On the 9500HP these /28 prefixes are be stored in EM/LPM memory, not TCAM)

<-- Hardware shared between CTS and VPN (resource is used when prefixes learned PE-PE, label imposition)

C9500-24Y4C#show platform software fed active mpls summary | b Resource shar

Resource sharing info:

```

  SI: 4/131072
  RI: 11/98304
  Well Known Index: 48/2048
  Tcam: 20/245760
  lvl_ecr: 0/64

```

```

lv2_ecr: 0/256
lspa: 1000/65536
label_stack_id: 2/65537
vpn_spoke_id: 0/255
indirect_si: 0/255
RSM resource database stats:
  Num of (L3+mpls) ADJ entries allocated: 37/196608
  Num of LABEL entries allocated: 4/45056 <-- LABEL does not increase (no
prefixes learnt from a local CE)
  Num of LSPA entries allocated: 1000/32768 <-- LSPA usage increased by 1000
(these prefixes require label stack to reach)
  Num of local adjs in mpls adjs: 4
  Num of SI stats allocated: 6/49152
  Adjs stats allocated by MPLS:
    Num of mpls adjs: 12
    Num of L3 adjs: 0
  Num of VPN prefix_id: 1000
AL MPLS SI/RI resource alloc stats:
  SI allocated: 1
  RI allocated: 6
  SI_STATS allocated: 6
  Unknowns allocs: 0
  Alloc no resource: 0
  Alloc errors: 0
  Free errors: 0
  Invalid free: 0
  Free unknown: 0
Other MPLS resource alloc error stats: <-- no resource allocation issues
  LENTRY out-of-resource errors: 0
  LENTRY general errors: 0
  LSPA out-of-resource errors: 0
  LSPA general errors: 0
  ADJ out-of-resource errors: 0
  SI stats alloc error: 0
  MPLS ADJ stats error: 0
  MPLS ADJ stats last error rc: 0

<-- Different resources are allocated to reach a local prefix (LABEL) versus a remote prefix
(LSPA)

```

ةيفي ك لوح لڤصافت وأ ، Catalyst 9000 ةماعال TCAM تامول عم ىلع لوصحلل :ةظحالم
[Catalyst تالوحم ىلع ةزهجال دراوم مهف](#) ةلاقم ل عجار ، ىرخأ تازيمل TCAM نم ققحتل
[9000.](#)

ADJ ب ةقلم ل تال كشم ل ءاطخأ فاشكتسال . كرتشم دروم يه (رواجتال) ADJ :ةظحالم
[Catalyst 9000 تالوحم ىلع ةزهجال دراوم مهف](#) ةلاقم ل عجار ، احوال صاؤ

IPv4 جالع و MPLS قاطن دح

نم ةيغلل ريبك ددع كالهتسا متي و ، MPLS ةزيم مادختسا اهي متي يتل تالاحال مطعم ي
 ةئداب لك (يضا رتفال) نم ةيمستال صي صخت ي ف ريغي تال دعاسي نأ نكمي ، ةزهجال دراوم
 دراومال صي صخت رابتعالا ي ف عاض ، لاثملا اذه ي ف (VRF) ةيرهاظ ي كلسال ددرت لك ىل
 (CE-PE) زاغ وه 9500 زارطال نوكي ، ةلاحال هذه ي ف) دعبولق

Usage with per-prefix label allocation

C9500-24Y4C#show platform hardware fed active fwd-asic resource tcam utilization

Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

Mac Address Table	EM	I	32768	19	0.06%	0	0	0
19								
Mac Address Table	TCAM	I	768	21	2.73%	0	0	0
21								
L3 Multicast	EM	I	32768	0	0.00%	0	0	0
0								
L3 Multicast	TCAM	I	768	6	0.78%	3	3	0
0								
L2 Multicast	TCAM	I	2304	7	0.30%	3	4	0
0								
IP Route Table	EM/LPM	I	212992	3023	1.42%	1014	0	2009
0 <-- 1 IPv4 prefix entry + 2 entries for labels (2 labels created per every 1 IPv4 prefix)								
IP Route Table	TCAM	I	1536	17	1.11%	12	3	2
0								

New usage after change to per-vrf lable allocation

C9500-24Y4C(config)#mpls label mode vrf MPLS protocol all-afs per-vrf

C9500-24Y4C#show bgp vpnv4 unicast all BGP table version is 164901, local router ID is 10.0.0.5

Network	Next Hop	Metric	LocPrf	Weight	Path
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal, r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter, x best-external, a additional-path, c RIB-compressed, t secondary path, L long-lived-stale,					
Origin codes: i - IGP, e - EGP, ? - incomplete					
RPKI validation codes: V valid, I invalid, N Not found					
Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 1:1 (default for vrf MPLS) *>	172.30.0.0/24	192.168.3.2			2219
0 65100 65101 65102 65103 {65104} e					
<...snip...>					

C9500-24Y4C#show bgp vpnv4 unicast all 172.30.0.0

BGP routing table entry for 1:1:172.30.0.0/24, version 163902

Paths: (1 available, best #1, table MPLS)

Advertised to update-groups:					
8					
Refresh Epoch 1					
65100 65101 65102 65103 {65104}					
192.168.3.2 (via vrf MPLS) from 192.168.3.2 (192.168.3.2)					
Origin EGP, metric 2219, localpref 100, valid, external, best					
Extended Community: RT:1:1					
mpls labels in/out IPv4 VRF Aggr:18116/nolabel <-- Verify you see a 'VRF Aggr' label					
type					
rx pathid: 0, tx pathid: 0x0					
Updated on Dec 9 2021 19:50:22 UTC					

Usage with per-vrf label allocation

Allocation on both local and remote PE is dramatically reduced via change to label allocation mode

local switch (PE-CE)

C9500-24Y4C#show platform hardware fed active fwd-asic resource tcam utilization

Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
-------	---------	-----	-----	------	-------	----	----	------

Other

```
-----  
-----  
Mac Address Table      EM          I          32768      19      0.06%      0        0        0  
19  
Mac Address Table      TCAM        I           768       21      2.73%      0        0        0  
21  
L3 Multicast           EM          I          32768      0       0.00%      0        0        0  
0  
L3 Multicast           TCAM        I           768       6       0.78%      3        3        0  
0  
L2 Multicast           TCAM        I          2304       7       0.30%      3        4        0  
0  
IP Route Table        EM/LPM      I          212992     1025     0.48%      1014     0        11  
0 <-- one local LABEL used to reach the CE learnt prefixes  
IP Route Table         TCAM        I          1536      17      1.11%      12       3        2  
0  
QOS ACL                 TCAM        I          1024      45      4.39%      15       20       0  
10
```

remote switch (PE-PE)

C9300-48U#show platform hardware fed switch active fwd-asic resource tcam utilization
Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

```
Table          Subtype      Dir      Max      Used      %Used      V4      V6      MPLS  
Other  
-----  
-----  
<...snip...>  
IP Route Table      EM          I          24576     23      0.09%      14       0       9  
0  
IP Route Table      TCAM        I          8192     1025     12.51%      1012     10       2  
1 <-- Still 1:1 usage for IPv4 prefixes  
<...snip...>  
CTS Cell Matrix/VPN  
Label              EM          O          8192      1       0.01%      0        0       1  
0 <-- one remote LSPA used to reach the PE learnt prefixes
```

مت يذلل لوجملاب صاخلا طاشنلا MPLS صخلم يف دراوملا مادختسا رهظي: ةظحالم
LSPA و LABEL يف اضيا ضافخنالا اذه يساسالا ماظنلا جم انرب ةطساوب هتذغت
(قيبطت لل لباق امهيا).

TAC ل عيمجتلا رماو

ددعتم لي وحتلاب ةقلعتم ل اعويش ةزهجال دراوم لكاشم رثكأ ل ليدلا اذه يظغي
اذه ل حمدع ةلاحي ف، كلذ عمو. ةبسانم ل حالصال تاوخط ذاختا عم، (MPLS) تالوكوتوربلا
ةمدخل بلطب اهقافراو ةحصولم ل رماوالا ةمئاق عيمجت يجرى، كب ةصاخلا ةلكشم ل ليدلا.

```
show ip route summary  
show ip bgp vpnv4 all | redirect flash:bgp_vpnv4_all  
show ip bgp vpnv4 all summary  
show ip route vrf <vrf-name> summary  
show mpls forwarding-table summary  
show ip cef vrf <name> | redirect flash:sh_ip_cef_vrf_<name>  
show ip cef vrf <name> summary  
show platform software fed switch active ip route summary
```

```
show platform software mpls switch <all switches> f0 forwarding-table
show platform software mpls switch <all switches> f0 label
show platform software mpls switch <all switches> f0 eos
show platform software object-manager switch <all switches> f0 error-object
show platform software object-manager switch <all switches> f0 pending-issue-update
show platform software fed switch <all switches> mpls label_ace all detail
show platform software fed switch <all switches> mpls eos all det
show platform software fed switch <all switches> mpls summary
show platform software fed switch active mpls forwarding all detail
show platform software object-manager switch 1 f0 statistics
show tech-support mpls | redirect flash:sh_tech_mpls
show logging | redirect flash:sh_logging_console
show platform hard fed switch active fwd resource tcam table sghash ASIC 0 format 0 | redirect
flash:vpn_lsps
```

```
request platform software trace archive last 30 days target flash
```

قصة تاذ تامولعم

[تاذ تامولعم - Cisco Systems](#)

[تاذ تامولعم \(MPLS\)، Cisco IOS XE Corelated 17.7.x
\(Catalyst 9300 Switches\)](#)

[تاذ تامولعم \(MPLS\)، Cisco IOS XE Corelated 17.7.x
\(Catalyst 9500 Switches\)](#)

[تاذ تامولعم Catalyst 9000](#)

ةمچرتل هذه لوج

ةللأل تاي نقتل نمة ومة مادختساب دن تسمل اذة Cisco تمةرت
ملاعلاء انء مء مء نمة دختسمل معد و تمة مء دقتل ةر شبل او
امك ةق قء نوك ت نل ةللأل ةمچرت لصف أن ةظحال مء ءرء. ةصاأل مء تءل ب
Cisco ةللخت. فرتمة مچرت مء دقء ةللأل ةل فارتحال ةمچرتل عم لاعل او
ىل إأمءءاد ءوچرلاب ةصوء و تامةرتل هذه ةقء نء اهءل وئس م Cisco
Systems (رفوتم طبارل) ةل صأل ةل ءل ءن إل دن تسمل