

Catalyst 9800 WLC

بيولاق داصم لخدم صي صخت

تايوت حمل

[قمدم](#)

[قيساس الابلطت](#)

[ابلطت](#)

[مدختسم تانوك](#)

[بيولخدم تافل م صي صخت](#)

[كبش لاي ف مكحتل رصنع لاي ص صخمل بيولاق داصم لخدم لي صخت
منيوكتو 9800 \(WLC\) قيس الابلطت](#)

[قصل لاي نم ققحت](#)

[اهالص او اعطخ الابلطت](#)

قمدم

قي لسل الابلطت دحول ص صخ م بيولاق داصم لخدم عاشن اقي في دنن تسم اذ حضي
Catalyst 9800 (9800 WLC).

قيساس الابلطت

بيومي صت ب زي متت ان امك، اهرجت لوه سب رصم لاي ص صخ ربل تام لعلت لاي صخت
رتوي بمك لاي صحت دوجوم لاي صحت بيولاق داصم لخدم قفاوت م و باجت سالا عيرس
لوم حمل لاي صحت.

ابلطت

الابلطت لاي صحت اوم لابلطت لاي صحت نوكت نابل Cisco صحت:

- HTML و CSS
- 9800 WLC نيوكت لاي صحت

مدختسم تانوك

اغص زاهو و قيصم ربل اذ لاي صحت قيصم اذ لاي صحت لاي صحت:

- Cisco Catalyst 9800 Wireless Controller Series, Cisco IOS® XE Gibraltar الابلطت 16.12.1s

صاخ لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت
لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت
لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت لاي صحت

بي و ل خدم تافل م صي صخت


ي ه ص صخم ل بي و ة قد اصم ل خدم لك شت ي ت ل تافل م ل

- لوخدل ل ليجست
- bootstrap.min.css
- jquery.min.js
- style.css
- ت ك ي ح ت .css
- web_auth_logo.png

ري رحت ل ل طوق تافل م ل ه ذه جاتحت

- لوخدل ل ليجست
- style.css
- web_auth_logo.png

اذه (لوخدل ل ليجست) بي و ل ة قد اصم ل خدم ل ردصم ل زم ل و ه اذه

 ل خدم ة بينب حرشت ي ت ل HTML تاقيلعت ل ع يوتحي ، ة ي انب زم ل ارقا : ة طحال م بي و ل ة قد اصم .

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">
  <title>YOUR COMPANY TITLE HERE</title>
  <script src="jquery.min.js"></script>
  <link rel="stylesheet" href="bootstrap.min.css">
  <link rel="stylesheet" href="animate.css">
<link rel="stylesheet" href="style.css" >
  <script>
    function submitAction(){
      var link = document.location.href;
      var searchString = "redirect=";
      var equalIndex = link.indexOf(searchString);
      var redirectUrl = "";

      if (document.forms[0].action == "") {
        var url = window.location.href;
        var args = new Object();
        var query = location.search.substring(1);
        var pairs = query.split("&");
        for(var i=0;i<pairs.length;i++){
          var pos = pairs[i].indexOf('=');
          if(pos == -1) continue;
          var argname = pairs[i].substring(0,pos);
          var value = pairs[i].substring(pos+1);
          args[argname] = unescape(value);
        }
        document.forms[0].action = args.switch_url;
      }
    }
  </script>
</head>
</html>
```

```

    if(equalIndex >= 0) {
        equalIndex += searchString.length;
        redirectUrl = "";
        redirectUrl += link.substring(equalIndex);
    }
    if(redirectUrl.length > 255)
        redirectUrl = redirectUrl.substring(0,255);
    document.forms[0].redirect_url.value = redirectUrl;
    document.forms[0].buttonClicked.value = 4;
    document.forms[0].submit();
}

```

```

function loadAction(){
    var url = window.location.href;
    var args = new Object();
    var query = location.search.substring(1);
    var pairs = query.split("&");
    for(var i=0;i<pairs.length;i++){
        var pos = pairs[i].indexOf('=');
        if(pos == -1) continue;
        var argname = pairs[i].substring(0,pos);
        var value = pairs[i].substring(pos+1);
        args[argname] = unescape(value);
    }
}

```

```

document.forms[0].action = args.switch_url;

```

```

// This is the status code returned from webauth log in action
// Any value of status code from 1 to 5 is error condition and user
// should be shown error as below or modify the message as it suits
// the customer

```

```

if(args.statusCode == 1){
    alert("You are already logged in. No further action is required on your part.");
}
else if(args.statusCode == 2){
    alert("You are not configured to authenticate against web portal. No further action is
}
else if(args.statusCode == 3){
    alert("The username specified cannot be used at this time. Perhaps the user is already
}
else if(args.statusCode == 4){
    alert("Wrong username and password. Please try again.");
}
else if(args.statusCode == 5){
    alert("The User Name and Password combination you have entered is invalid. Please try
}
}

```

```

</script>

```

```

</head>

```

```

<body class="animated fadeInUp">

```

```

<!-- TOP BAR -->

```

```

<nav class="navbar navbar-expand-md sticky-top navbar-light bg-dark ">

```

```

```

```

<div class="container">

```

```

    <h4 class="align-middle text-white">Your Company Name Here</h4>

```

```

</div>

```

```

</nav>

```

```

<!-- END TOP BAR -->

```

```

<div class="bg"> <!--Background color -->

<div class="container-fluid padding "><!-- page content -->
  <div class="row padding">
    <div class="col-md-12 col-lg-6">
      <br>
      <h5>Accessing Company Public Network From Your Wireless Device</h5>
      <p class="text-justify">The Company provides Internet access points at no charge in selected areas.
        computers or devices capable of receiving wireless signals.
        You can access the Internet from your wireless device when sitting within range of an access point.
        Guests are expected to use the wireless access in a legal and responsible manner. By using the wireless
        user acknowledges that he/she is subject to, and agrees to abide by all laws, and all regulations that are
        applicable to Internet use.
      </p>
      <br>
      <h5>Terms and Conditions of Use</h5>
      <p class="text-justify">Guests need a notebook/laptop computer or other device equipped with a wireless network card.
        The Company assumes no responsibility for the safety of equipment.</p>
      <br>
      <br>
      <div class="card mx-auto" style="width: 350px;"> <!--Form container-->
      <h5 class="card-header info-color white-text text-center py-4">
      <strong>Sign in</strong>
      </h5>
      <div class="card-body px-lg-5 pt-0"><!--Form content-->
      <!-- Form -->
      <form class="text-center" style="color: #757575;" method="post">
        <input TYPE="hidden" NAME="buttonClicked" SIZE="16" MAXLENGTH="15" value="0">
          <input TYPE="hidden" NAME="redirect_url" SIZE="255" MAXLENGTH="255" VALUE="">
          <input TYPE="hidden" NAME="err_flag" SIZE="16" MAXLENGTH="15" value="0">
      <!-- Username input -->
      <div class="md-form"><br>
        <label for="materiallog inFormEmail">Username</label>
        <input type="TEXT" name="username" SIZE="25" MAXLENGTH="63" VALUE="" class="form-control">
      </div><br><!-- End Username input -->
        <!-- Password input-->
      <div class="md-form">
        <label for="materiallog inFormPassword">Password</label>
        <input type="password" name="password" SIZE="25" MAXLENGTH="63" VALUE="" class="form-control">
      </div><br><!-- End password input -->
      <!-- Sign in button -->
        <button class="btn btn-outline-info btn-rounded btn-block my-4 waves-effect z-depth-0">Sign in
      </form> <!-- End FORM -->
      </div><!-- End Form content-->
    </div><!--Form container-->
  </div>
</div>
</div><!-- End page content -->
</div><!--End background color -->

</body>
</html>

```

عطقملا اذه ناونعلا ريح ت ب مق ، ةحفصلا ريغت


```

...
<title>YOUR COMPANY TITLE HERE</title>

```

...

png أو svg. قيس ننتب ةروص مدختسأ، زيي مت ةمالع ريح تبت مق، ةكرش لراعش ريي غتل
ضرع لاول لوطال تالماعم ريي غتب مق، كراعش مجح طبض ل

 بولس أو رهظم يلع لوصحلل ةفافش ةيفلخ تاذ svg. روص مادختساب ي صوي: ةظالم
لضفأ

```
<#root>
```

```
<!-- TOP BAR -->
```

```
<nav class="navbar navbar-expand-md sticky-top navbar-light bg-dark ">
```

```

```

```
<div class="container">
```

```
  <h4 class="align-middle text-white">Your Company Name Here</h4>
```

```
</div>
```

```
</nav>
```

```
<!-- END TOP BAR -->
```

style.css فلم يلع ةصاخلا كتئف ءاشناب مق، ةحفصلل ناو نع ةيفلخ نول ريي غتل
ةصصخملا ةئفلاب bg-dark ل دب ت ساو

```
<#root>
```

```
<!-- TOP BAR -->
```

```
<nav class="navbar navbar-expand-md sticky-top navbar-light
```

```
my-custom-bg-class
```

```
">
```

```

```

```
<div class="container">
```

```
  <h4 class="align-middle text-white animated fadeInLeft slow">Your Company Name Here</h4>
```

```
</div>
```

```
</nav>
```

```
<!-- END TOP BAR -->
```

bg: ةئف ريي غتب مق، ةحفصلل صنللاو ةيفلخلل نول ريي غتل

```
<#root>
```

```
<div class="
```

```
bg
```

```
"> <!--Background color -->
```

ةي عبتلاب ناريتي صنلاو ةيفلخال نول نأ ظحال، ةحاتملا تائفلا يه اه:

bg	bg2	bg3
bg4		bg6

إذ CSS ريرحتب مق style.css فلم ىلع فلتخم نول وأ ةيفلخال ةروص مادختسإ ديرت تنك إذا همادختساو bg ةئف

⚠ ببسب ةلومحملل ةزهجالا ىلع حيص لكشب ةيفلخال ةروص ودبت نأ نكمي ال: ريدحت ببسب ةلومحملل ناولأ ببسب صنلا ةءارق بعصلال نم نوكي نأ نكمي و، اهمجح

```
.bg-img{
  background-image: url("winter.jpg");
  height: 100%;
  background-position: center;
  background-repeat: no-repeat;
  background-size: cover;
}
```


ةئلالاتل ةروصلالك ودبت ةيفلخال ام ةروص مادختسإ:

Accessing Company Public Network From Your Wireless Device

The Company provides Internet access points at no charge in selected areas for guests with portable computers or devices capable of receiving wireless signals. You will be able to access the Internet from your wireless device when sitting within range of an access point. Guests are expected to use the wireless access in a legal and responsible manner. By using this wireless access network, the user acknowledges that he/she is subject to, and agrees to abide by all laws, and all state and federal rules and regulations applicable to Internet use.

Terms and Conditions of Use

Guests will need a notebook/laptop computer or other device equipped with a wireless card that supports the WiFi standard. The Company assumes no responsibility for the safety of equipment.

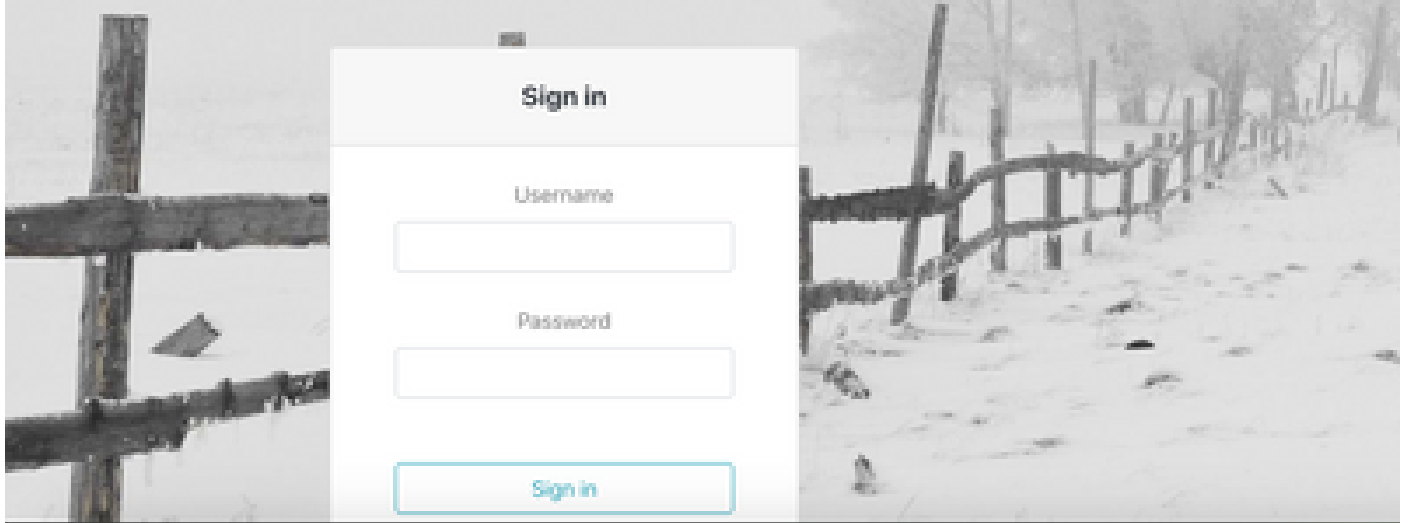

ةفلا ةرصلاتلا ةروصللا ءدب ء bg5 ةفلا



Accessing Company Public Network From Your Wireless Device

The Company provides Internet access points at no charge in selected areas for guests with portable computers or devices capable of receiving wireless signals. You will be able to access the Internet from your wireless device when sitting within range of an access point. Guests are expected to use the wireless access in a legal and responsible manner. By using this wireless access network, the user acknowledges that he/she is subject to, and agrees to abide by all laws, and all state and federal rules and regulations applicable to Internet use.

Terms and Conditions of Use

Guests will need a notebook/laptop computer or other device equipped with a wireless card that supports the WiFi standard. The Company assumes no responsibility for the safety of equipment.

Sign in

Username

Password

Sign in

ةؤفلا ةروللا ءوؤلا ءوؤة Bg6 ءؤفلا:

Accessing Company Public Network From Your Wireless Device

The Company provides Internet access points at no charge in selected areas for guests with portable computers or devices capable of receiving wireless signals. You will be able to access the Internet from your wireless device when sitting within range of an access point. Guests are expected to use the wireless access in a legal and responsible manner. By using this wireless access network, the user acknowledges that he/she is subject to, and agrees to abide by all laws, and all state and federal rules and regulations applicable to Internet use.

Terms and Conditions of Use

Guests will need a notebook/laptop computer or other device equipped with a wireless card that supports the WiFi standard. The Company assumes no responsibility for the safety of equipment.

Sign in

Username

Password

مسقلا اذە ريرحتب مق ،كب ةصاخلا طورشل او م كحألاب ةحفصلا ووتحت رييغت

<h5>Accessing Company Public Network From Your Wireless Device</h5>

<p class="text-justify">The Company provides Internet access points at no charge in selected areas for guests with portable computers or devices capable of receiving wireless signals.

You are able to access the Internet from your wireless device when sitting within range of an access point. Guests are expected to use the wireless access in a legal and responsible manner. By using this wireless access network, the user acknowledges that he/she is subject to, and agrees to abide by all laws, and all state and federal rules and regulations applicable to Internet use.

</p>

<h5>Terms and Conditions of Use</h5>


<p class="text-justify">Guests need a notebook/laptop computer or other device equipped with a wireless card that supports the WiFi standard. The Company assumes no responsibility for the safety of equipment.</p>

رييغت .ديقت نود ةكرحتم موسررت فضا عي طتسي تنأ ،ةقداصلما لخدم ةيوس in order to

نېموسرر مادختسا مت، لاثملا لېبس ىلع. ةكرحتملا موسرلا ةئف دعب ةكرحلا مسان
animate.css ةرايزب مق، ةرفوتملا ةكرحتملا موسرلا ةدهاشملا. نېكرحتم

```
<#root>
...
<body class="
animated fadeInUp
">
...
<h4 class="align-middle text-white
animated fadeInLeft slow
">Your Company Name Here</h4>
...
```


ةمالع رتخأ. ةكرحتملا موسرلا عم ةصصخملا بېولا ةقداصم ةباوبل ىئاهنلا رهظملا ىه هذه
ىح لاثم ضرعل جئاتن بېوبتلا

 ةئف عاشناب مق. دىرت امك طوطخلاو ةيفلخلا ناولا رىرت ةلوهسب كنكمى: جىملا
همدختساو style.css فلم ىف ةدىج

ىف مكحتملا رصنع ىلا صصخملا بېولا ةقداصم لخدم لىمحت هنيوكتو 9800 (WLC) ةىكلساللا ةىلحملا ةكبشلا

بېولا ةقداصم ةمزح نيوكتو تىبثت ةىفكى لوح ةوطخب ةوطخ ةىلمع مسقلا اذى طغى
Cat 9800 ىف ةصصخملا


1. ةىكلساللا ةىلحملا ةكبشلا مكحت ةدحول بېولا ةقداصم ةمزح لىزنناب مق.
(WLC_WEBAUTH_BUNDLE_1.0.zip) نم Cisco.com:
<https://software.cisco.com/download/home/286316412/type/282791507/release/16.10.1>

 كنكمى، لاثملا لېبس ىلع. 9800 مكحتملا تادحو عىمجل اهسفن ىه ةمزحلا: ةظحالم
9800-CL زارطلا و 9800-L زارطلا همدختساو 9800-40 ةلسلسلا نم فلملا لىزنناب
ىضارتفالا


2. لىجاتحى HTML فلم لك حتفا. دلجم ىلا ةمزحلا طغض اغلاب مق، ةمزحلا صىصخت لجا نم.
كنكمى، ةمه رىغ تافلما عامسا. هعم راعشلا لىمحت كنكمى و، اقبسم حضوم وه امك رىرت
هدىرت ةىش ىاب مهب لاصتالا

دىج فلم عاشناب ىلا جاتحتسا كنأل "tar لوخدلا لىجست" فلم فذحا، ةوطخلا هذه دعب

(هتي بثت مت لثامم جم انرب ي أ و) 7-ZIP رتخاو، نم يأل س وامل رزب رقن او تافل مل لك رتخا
... في شرأل إلى ة فاضا رتخاو

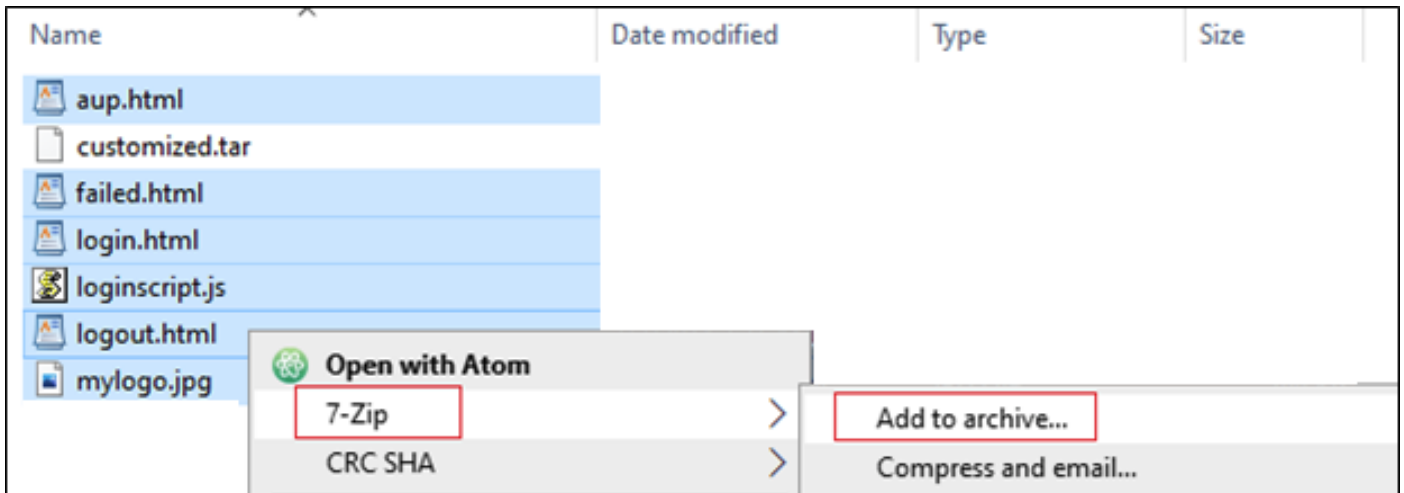

في شرأ قي سننتك tar رتخاو مس ي أ هطعا:

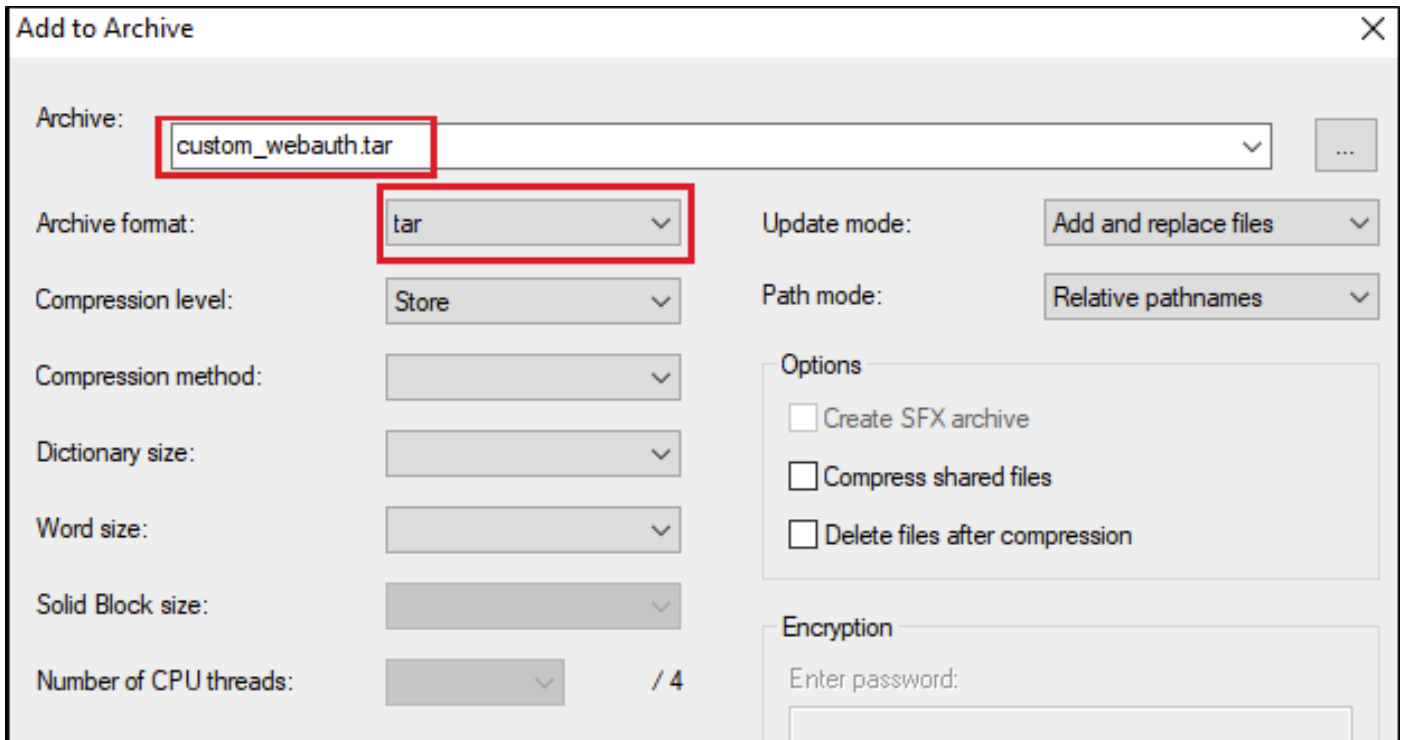

3. 9800 زارط (WLC) ةي كل سالل ةي لحملا ةكبشلا ي ف مكحتلا رصنع إلى لقتنا م ث.

ةقداصم ةمزح إلى فلملا عون ريغيغت م ةداعتسال او يطايتحال خسنل > ةرادإل > ةرادإل
طقف صصخمل tar. فلم ليحتب مقو، بيولا

Cisco Catalyst 9800-L Wireless Controller 17.3.1

Administration > Management > Backup & Restore

Search Menu Items

Dashboard

Monitoring >

Configuration >

Administration >

Licensing

Troubleshooting

Config File Management

Copy To Device

File Type Web Auth Bundle

Transfer Mode HTTP

Source File Path*

Select File

customized.tar

Download File

Cisco Catalyst 9800-L Wireless Controller 17.3.1

Administration > Management > Backup & Restore

Search Menu Items

Dashboard

Monitoring >

Configuration >

Administration >

Licensing

Troubleshooting

Config File Management

Copy To Device

File Type Web Auth Bundle

Transfer Mode HTTP


Source File Path*

Select File

customized.tar ✓

DownloadFile

يأب هب لصتا :ةتقؤملا ديهمتلا ةركاذ لخاد ادلجم 9800 لا ئشنني نأ نكمي ،يضا رتفا لكشب
دلجملا كلذيف تافللملا لك نوكت نأ نكميو ،.tar فلم

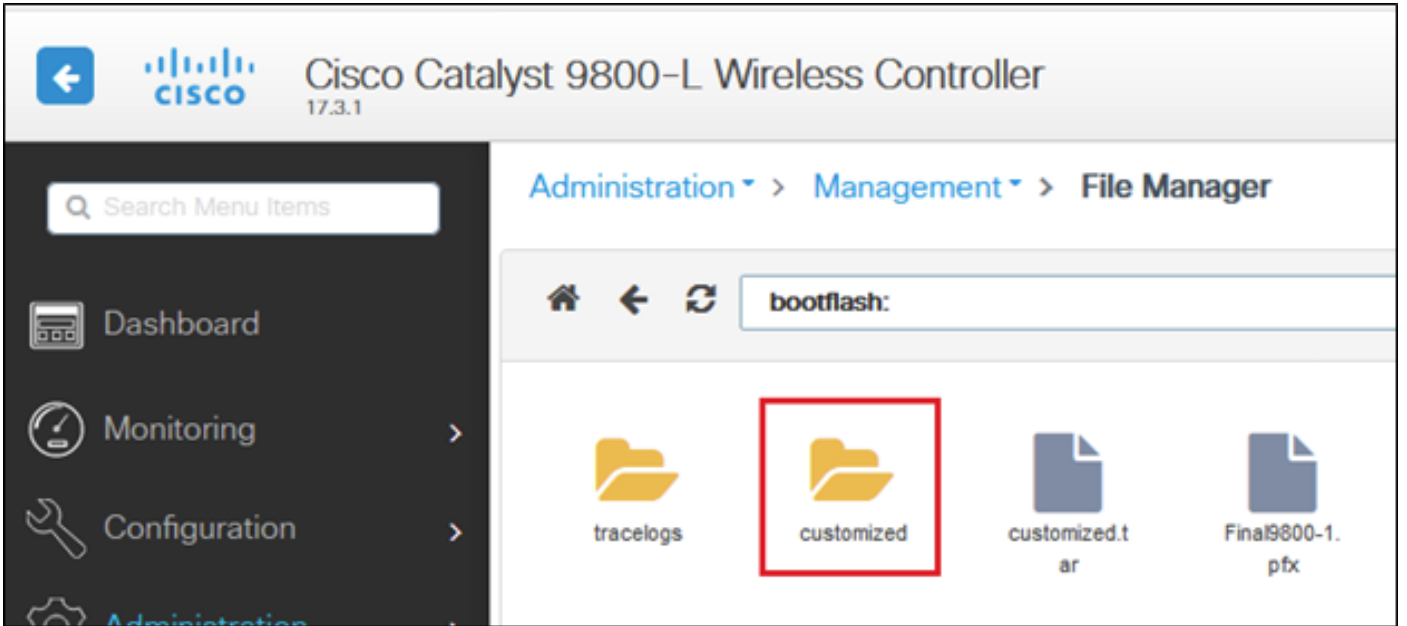

(يُلبق تسم قاطا و) زم 17.3 ضكري نأ جاتحت تنأ كلذ دعب، HA setup تنأ يقلتني نأ
أطخ نيسحت اذ ب بسب

ديهم تل اركاذى لى بيولا لوجمل tar ةمزح خسنأ: [Cisco CSCvr05309](#) نم ااطخ ألاجي حصت فرعم
HA دادع الاجي ف، اضيأ. ةيطايتحال (bootflash) ةتقؤملا

Customized.tar م ساب فلم ليحت مت اذا، (زهاج و طشن) HA نم لك نم ققحتلل

9800-1#show bootflash: | صصخم | %s


9800-1#show stby-bootflash: | صصخم | %s

```

9800-1#show bootflash: | s customized
1313      161280 Oct 08 2020 16:17:15.0000000000 +00:00 customized.tar
1314      4096 Oct 08 2020 16:17:15.0000000000 +00:00 customized
1315      2595 Oct 08 2020 16:17:15.0000000000 +00:00 customized/aup.html
1316      327 Oct 08 2020 16:17:15.0000000000 +00:00 customized/failed.html
1317      4071 Oct 08 2020 16:17:15.0000000000 +00:00 customized/login.html
1318      318 Oct 08 2020 16:17:15.0000000000 +00:00 customized/loginscript.js
1319      1116 Oct 08 2020 16:17:15.0000000000 +00:00 customized/logout.html
1320     147245 Oct 08 2020 16:17:15.0000000000 +00:00 customized/mylogo.jpg
9800-1#
9800-1#
9800-1#show stby
9800-1#show stby-bootfl
9800-1#show stby-bootflash: | s customized
1154     161280 Oct 08 2020 16:17:15.0000000000 +00:00 customized.tar
1234      4096 Oct 08 2020 16:17:16.0000000000 +00:00 customized
1235      2595 Oct 08 2020 16:17:16.0000000000 +00:00 customized/aup.html
1236      327 Oct 08 2020 16:17:16.0000000000 +00:00 customized/failed.html
1237      4071 Oct 08 2020 16:17:16.0000000000 +00:00 customized/login.html
1238      318 Oct 08 2020 16:17:16.0000000000 +00:00 customized/loginscript.js
1239      1116 Oct 08 2020 16:17:16.0000000000 +00:00 customized/logout.html
1240     147245 Oct 08 2020 16:17:16.0000000000 +00:00 customized/mylogo.jpg
9800-1#
9800-1#
9800-1#

```

 HA دادعت سا عم ايودي اهلي محت مت يتلا تافلما ةنمازم مت ال :ةظالم

 جاتحي نا .لمعت ةصصخم بيو ةقداصم لعجل Success.html فلم يلا جاتحت ال :ةظالم
 tar نا ليمحتو ،دربم .tar ل يلا وه تفضأو دحاو تقلخ ةطاسبب عيطتسي تنأ ،نأ تنأ
 9800 WLC ل يلا دربم

4. ناونع فذح ي دؤي دق .يرهاظ IP ناونع نييعتو WebAuth ل ةماعلا ةملا عملا ةطيخ ريختب مق .
 لخدملا ةحفص ي فحيحص لكشب روصلا ضرع مدع يلا يرهاظلا IP

Edit Web Auth Parameter
✕

General
Advanced

Parameter-map name	<input type="text" value="global"/>
Banner Type	<input checked="" type="radio"/> None <input type="radio"/> Banner Text <input type="radio"/> File Name
Maximum HTTP connections	<input type="text" value="100"/>
Init-State Timeout(secs)	<input type="text" value="120"/>
Type	<input type="text" value="webauth"/>
Virtual IPv4 Address	<input type="text" value="192.0.2.1"/>
Trustpoint	<input type="text" value="--- Select ---"/>
Virtual IPv4 Hostname	<input type="text"/>
Virtual IPv6 Address	<input type="text" value="xxxxxx"/>
Web Auth intercept HTTPs	<input type="checkbox"/>
Watch List Enable	<input type="checkbox"/>
Watch List Expiry Timeout(secs)	<input type="text" value="600"/>
Captive Bypass Portal	<input type="checkbox"/>
Disable Success Window	<input type="checkbox"/>
Disable Logout Window	<input type="checkbox"/>
Sleeping Client Status	<input type="checkbox"/>

✕ Cancel

👍 Update & Apply


عقوم ريذحت نويكلسالل العالم على ضرعي، يرهاظال IP ناوع نييعت درجمب: عظالم HTTPS ربع URL ناوع لسرتة يرهاظال مكحتال ةدحو ةهجاو نأل ضرعتسملال لىع بيولا ءارجال مدختسأ، ةلجال هذه يف. هب ةقفرم ةعقوم ةداهش دوجو مدعل ارظن هب قوئوم ريغ ءحلص ةداهش تيبتتو [CSR ءاشنال](#).

URL ناوع لاسرا متي يكل نييرمأل نيذه ليغشت نكمي، ابولطم HTTPS نكي مل اذا طوقف (ثدأل تارادصلال او 17.3.1 يف طوقف ةدوجوم رماوالا هذه) طوقف HTTP ربع


```

#configure terminal
(config)#parameter-map type webauth global
(config-params-parameter-map)#secure-webauth-disable
(config-params-parameter-map)#webauth-http-enable
(config-params-parameter-map)#end
#write
  
```

5. مَدْخَسَم لآ هَجَاو نَم لَقْتِنَا .ةَدِيْدَج ةَمَلْعَم ةَطِيْرَخ ءِاَشْنِإ يَف ةَيَلَلَات لآ ةَوَطْخَل لَثْمَتَت .ةَفَاَصْإ > بِيْوَلَا ةَقْدَاَصْم > نَامْأَل > 9800 ةَيَمْوَسْرَللَا

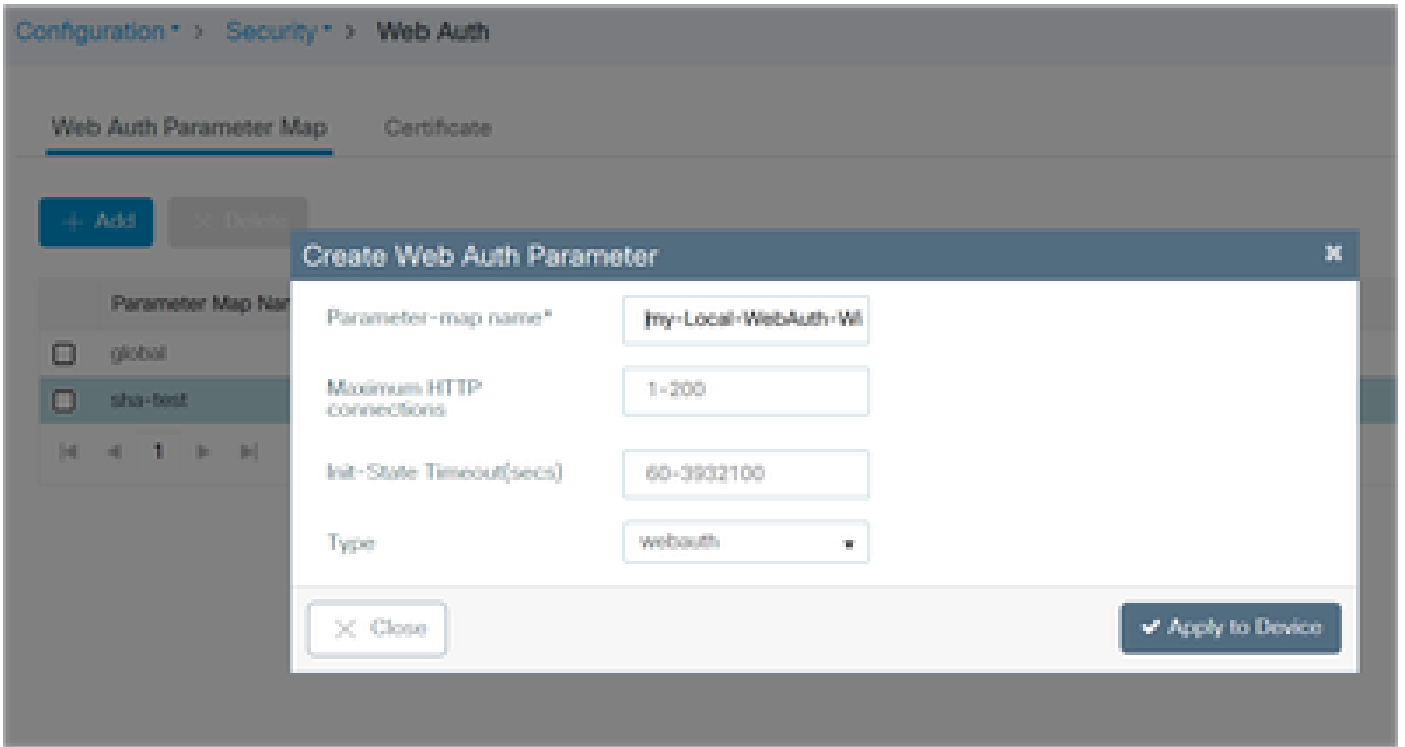


اهئاشنإ درجمب ريرحتلل ةَمَلْعَم لآ ةَطِيْرَخ مَسَا قَوْف رَقْنَا:

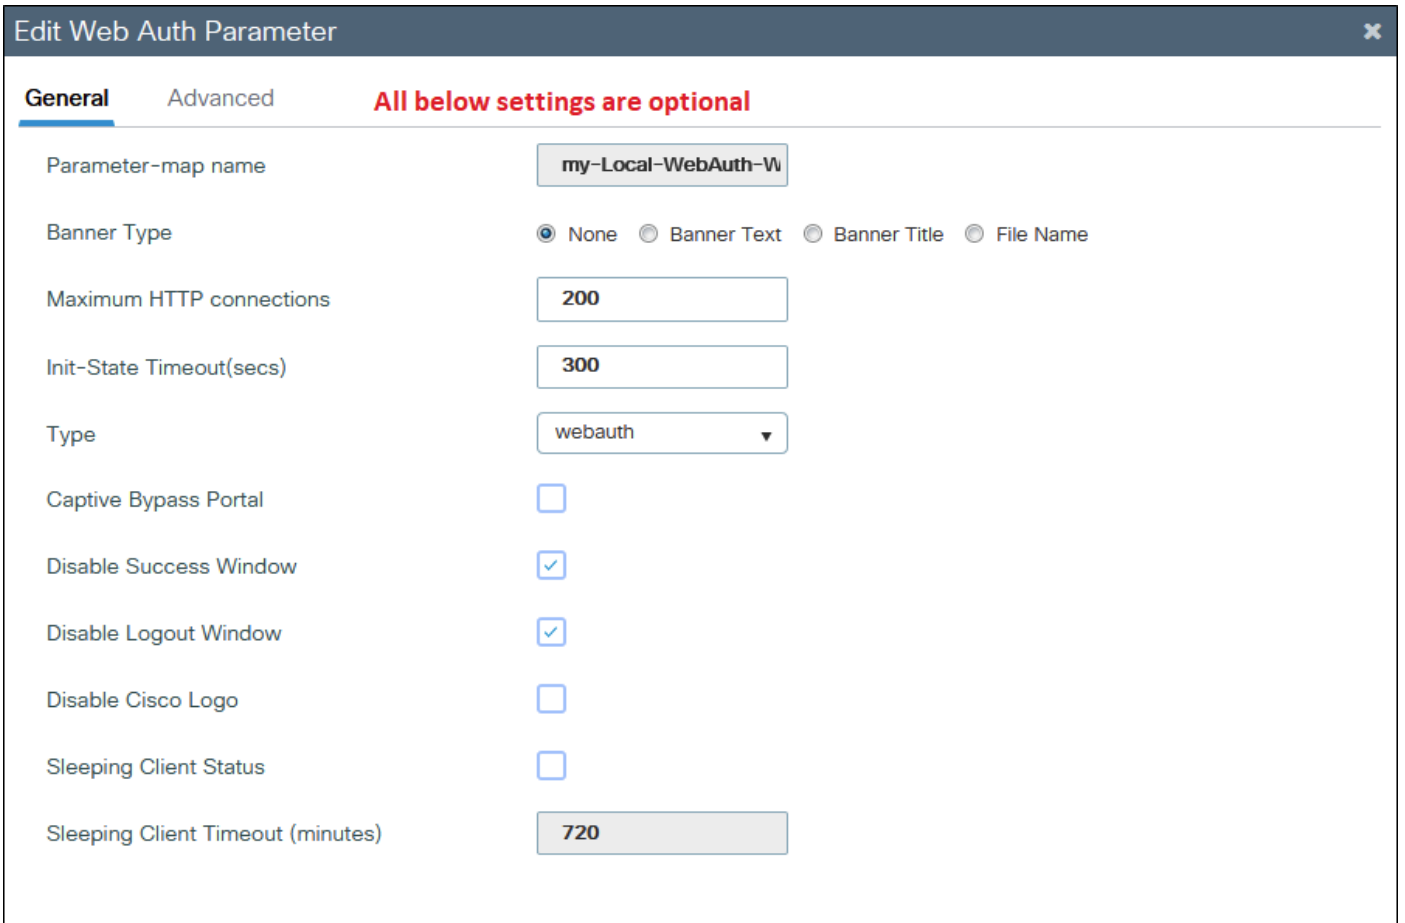

إذا Success.html سىلو 9800 ةىضارتفالاحنللا ةحفصلللىطعتل "احنللا ةذفان لىطعت" ددح احنللا ةحفصل نم ةدحاو، ةجودزم احنللا ةحفصل فىضلال ىرىس ف، نىنثاللا مدختست تنك ةصفصملا احنللا ةحفصل نم ىرخألاو، 9800 ةىضارتفاللا.html.

مادختسا مدعو احنللا ةذفان لىطعت (احنللا ةحفصل عىمجل لىطعتب تمق إذا ىتح ةزهجأ اهارت امنىب، ةحضوم احنللا ةحفصل ىرت ةلومحمللا ةزهجألا نإف، Success.html)، ةىفتخت مثة ىنثال رتوىبمكلا.

iPhone نم لاثم:

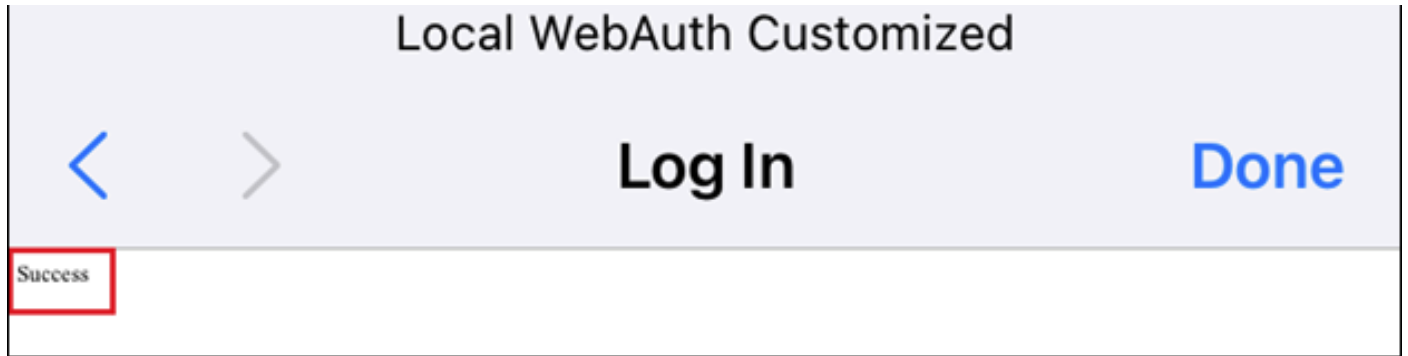

بىوللا ةقداصم لوخد لىجست

Edit Web Auth Parameter

General

Advanced

Redirect to external server

Redirect for log-in	<input type="text"/>
Redirect On-Success	<input type="text"/>
Redirect On-Failure	<input type="text"/>
Redirect Append for AP MAC Address	<input type="text"/>
Redirect Append for Client MAC Address	<input type="text"/>
Redirect Append for WLAN SSID	<input type="text"/>
Portal IPV4 Address	<input type="text"/>
Portal IPV6 Address	<input type="text" value="X::X::X::X"/>
Express WiFi Key Type	<input type="text" value="--- Select ---"/>

Customized page

Login Failed Page	<input type="text" value="bootflash:/customized/"/> 
Login Page	<input type="text" value="bootflash:/customized/"/> 
Logout Page	<input type="text" value="bootflash:/customized/"/> 
Login Successful Page	<input type="text" value=""/> 

رايتخ| كنكمي و،كلذ ليحت 9800 ل لواح ي،ةحفص ي| بناجب ءاقرزلا ةنوقيألا ىلع ترقن اذا
ح.ضوم وه امك تاحفصل

General

Advanced

Loading customized web pages

Edit Web Auth Parameter
✕

General
Advanced

Redirect to external server

Redirect for log-in	<input type="text"/>
Redirect On-Success	<input type="text"/>
Redirect On-Failure	<input type="text"/>
Redirect Append for AP MAC Address	<input type="text"/>
Redirect Append for Client MAC Address	<input type="text"/>
Redirect Append for WLAN SSID	<input type="text"/>
Portal IPV4 Address	<input type="text"/>
Portal IPV6 Address	<input type="text" value="XXXXXX"/>
Express WiFi Key Type	--- Select --- ▼

Customized page

Login Failed Page	<input type="text" value="bootflash:/customized/failed.html"/> ▼
Login Page	<input type="text" value="bootflash:/customized/login.html"/> ▼
Logout Page	<input type="text" value="bootflash:/customized/logout.html"/> ▼
Login Successful Page	<input type="text" value="--Select--"/> ▼ <ul style="list-style-type: none"> <li style="background-color: #0070c0; color: white; padding: 2px;">--Select-- <li style="padding: 2px;">bootflash:/customized/aup.html <li style="padding: 2px;">bootflash:/customized/failed.html <li style="padding: 2px;">bootflash:/customized/login.html <li style="padding: 2px;">bootflash:/customized/logout.html <li style="padding: 2px;">bootflash:/customized/success.html

✕ Cancel

➤ Update & Apply

Guided Assistance

6. ةيحلحمل ةكبش لل ةملم ةطيرخ لىل ةمالم ةضوي ةيلال ةوطخل لثمتت في (WLAN) > تافي صوت و تامالم > Cat9800 ل (GUI) ةيموسرل م دختس مل ةهجا ةيكلسالل فويضال تاباسح نم فويضال (WLAN) ةيكلسالل ةيحلحمل ةكبش لل قداصت، لاثملا اذه (RADIUS مداخل) ISE نم م، ال و 9800 ب ةصاخال ةيحلحمل.

✎ مئاوقو (AAA) ةبسالمل او ضي و فتل او قداصم لتاني وكت ةفاضل نكمي: ةطخال م (يريختخ) ةوطخل هذه في قداصم لل بق (ACL) لوصول في مكحتل.

Edit WLAN

General **Security** Advanced Add To Policy Tags

Layer2 **Layer3** AAA

Web Policy

Web Auth Parameter Map With-Custome-Bundle ▾

Authentication List default ▾ ⓘ

On Mac Filter Failure

Splash Web Redirect DISABLED

Preauthentication ACL

IPv4 None ▾

IPv6 None ▾

<< Hide


For Local Login Method List to work, please make sure the configuration 'aaa authorization network default local' exists on the device

RADIUS مداخل ي أو ISE ل نيوكتال جذومن

```
radius server ISE
address ipv4 x.x.x.x auth-port 1812 acct-port 1813
timeout 5
retransmit 3
automate-tester username dummy probe-on
key XXXXXXXXXXXX
exit
aaa group server radius RADIUS-GROUP
server name ISE
exit
aaa authentication dot1x ISE-Method group RADIUS-GROUP
aaa authorization network ISE-Method group RADIUS-GROUP
aaa accounting identity default start-stop group RADIUS-GROUP
aaa authentication webauth default local group RADIUS-GROUP
end
```

✎ نم ققحتال متي، (CLI) رماوالا رطس ةهجاول ريخالأ رمالأ نم حضوم وه امك: ةظحال م ي ل حملال لىل ةقداصلال رصق كنكمي. ISE/RADIUS م، الوأ ي ل حملال مدختسملال ةقداصل م متي، لالاملال لىل ةقداصلال رصق كنكمي. ءاوس دح لىل ةقداصلال رصق كنكمي، الوأ ي ل حملال مدختسملال ةقداصلال رصق كنكمي. ISE/RADIUS لىل ةقداصلال رصق كنكمي، الوأ ي ل حملال مدختسملال ةقداصلال رصق كنكمي. RADIUS لىل ةقداصلال رصق كنكمي، الوأ ي ل حملال مدختسملال ةقداصلال رصق كنكمي.

فيلض مدختسملال > نامال > نيوكتال لىل لقتنا، ني ي ل حملال ني رىل ني مدختسملال ةقداصلال

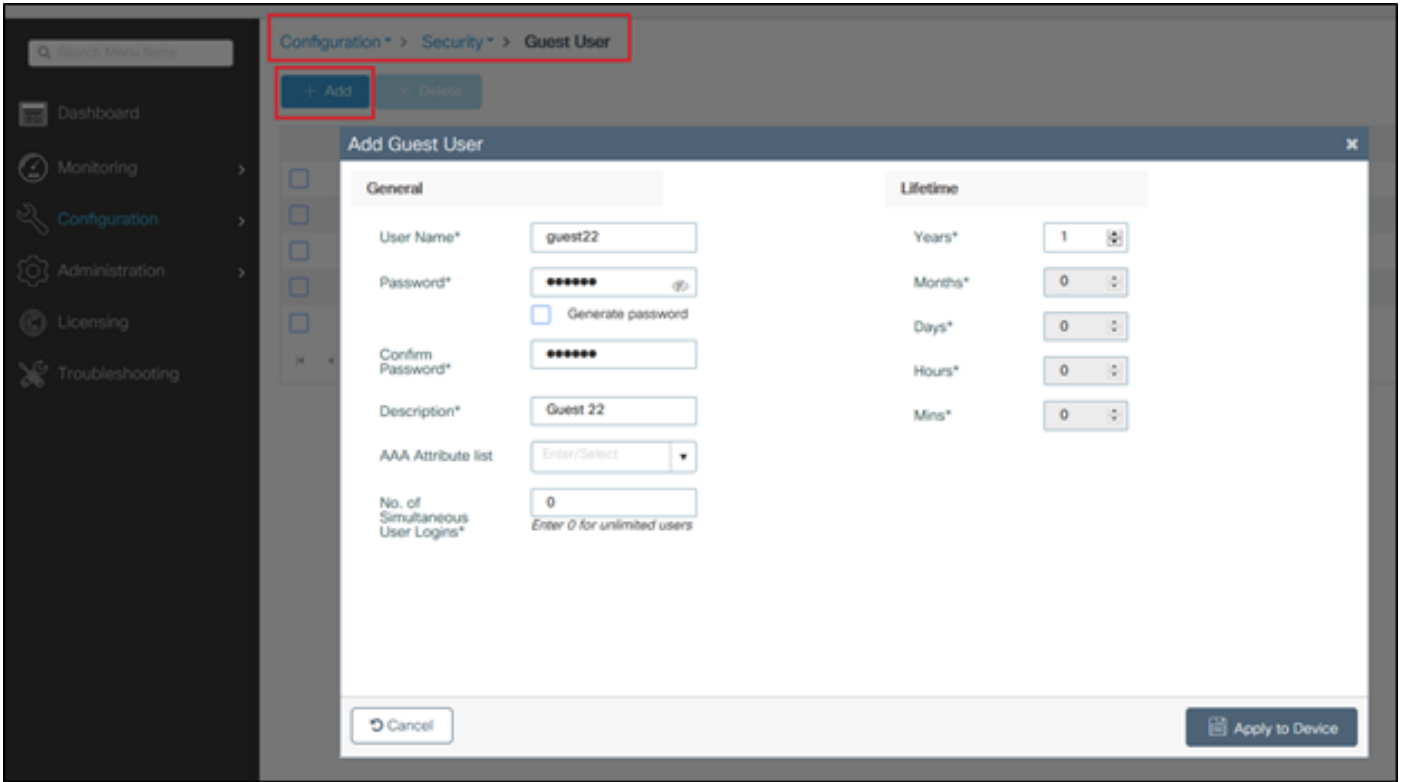

ةحصل لا نم ققحت لا

موسر لا ةحص نم دكأتو ، بي و ح ف ص تم ما دخ ت سا ب log in.html ف لم ح ت ف ب م ق ، ك بس اج ل ع ي و ت ح م لا و ة ك ح م لا

اه حال ص ا و ا ط خ ال ا ف اش ك ت سا

م ك ح ت لا ر ص ن ع ل ع ا ه ل ك ل ي م ح ت د ن ع ة ي ع ر ف ت ا د ل ج م ل ع ت س ي ل ت ا ف ل م لا ع ي م ج ن ا نم د ك ا ت ا ف ل ت خ م ا م س ا ل م ح ت ال ا ه ن ا و ، 9800 ز ا ر ط (WLC) ة ي ك ل س ال ل ا ل ا ل ح م لا ة ك ب ش ل ل ي ف

ةمچرتل هذه لوح

ةللأل تاينقتل نم ةومجم مادختساب دن تسمل اذه Cisco تچرت
ملاعلاء انءم ءم نيم دخت سمل معدى وتحم ممدقتل ءيرشبل او
امك ءقيد نوك تنل ءل ءمچرت لصف انءم ءم ءم ءم ءم ءم ءم ءم
Cisco ءلخت . فرتم مچرت مءم دقيل ءل ءل ءل ءل ءل ءل ءل ءل
ىل ءمءاد ءوچرلاب يصوء و تامچرتل هذه ءق دن ءم ءل ءل ءل
م (رفوتم طبارل) يلصل ءل ءل ءل ءل ءل دن تسمل