

# Configure System NVE Infra-Vlans in VXLAN BGP EVPN on Nexus 9000 Switches

## Contents

---

### [Introduction](#)

### [Prerequisites](#)

[Requirements](#)

[Components Used](#)

### [Use Cases](#)

[Orphan port on a Leaf Switch in vPC](#)

[Failure of uplink on a Leaf Switch in vPC](#)

[Border Leaf Switches in vPC](#)

[Bud node](#)

### [Configure](#)

[Network Diagram](#)

[Configurations](#)

### [Verify](#)

### [Troubleshoot](#)

---

## Introduction

This document describes the purpose of the system nve infra-vlans command in Virtual Extensible LAN Border Gateway Protocol Ethernet VPN (VXLAN BGP EVPN) fabrics based on Cisco Nexus 9000 Switches which run the NX-OS Operating System.

When Nexus 9000 switches are configured as VXLAN Leaf Switches also known as VXLAN Tunnel End Points (VTEP) in virtual Port Channel (vPC) domain, you must have a backup Layer 3 Routing adjacency in between them over the vPC peer-link with the use of an interface vlan. This VLAN must be local to the switches, not stretched across the VXLAN fabric and belong to the Default VRF (Global Routing Table).

Ensure the system nve infra-vlans command is in place on Nexus 9000 platforms with CloudScale ASIC to specify the VLAN can act as an uplink and properly forward the frames with VXLAN encapsulation over the vPC peer-link.



**Note:** This document is not applicable to Cisco Nexus 9000 Switches which run in Application Centric Infrastructure (ACI) mode and managed by the Cisco Application Policy Infrastructure Controller (APIC).

---

## Prerequisites

### Requirements

Cisco recommends that you have knowledge of these topics:

- Nexus NX-OS Software
- VXLAN BGP EVPN

## Components Used

The information in this document is based on these software and hardware versions:

- Cisco N9K-C93180YC-EX
- NXOS version 7.0(3)I7(6)

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, ensure that you understand the potential impact of any command.



**Note:** This document makes use of the terms Leaf Switch, VTEP and ToR interchangeably.

---

## Use Cases

The next use cases show when it is required to configure the system `nve infra-vlans` command. In all of them, the allocated VLAN 777 needs to be defined as part of the system `nve infra-vlans` command and be used to instantiate a Layer 3 Routing backup adjacency over the vPC peer-link. This VLAN 777 needs to be part of the Default VRF (Global Routing Table).




**Note:** These use cases describe the common scenario of an end-host or Routers physically connected directly to the Cisco Nexus 9000 VXLAN Leaf or Border Leaf Switches. Similarly, these use cases apply in case of a Layer 2 Switch or bridge is in between the Nexus 9000 Leaf Switches and the end-host or Routers.

---


## Orphan port on a Leaf Switch in vPC

This use case depicts an end-host inside the fabric (Host-A) connected to a single Cisco Nexus 9000 VXLAN Leaf Switch part of a vPC domain. This is known as an Orphan Port connection. As part of Routing, traffic generated by an end-host connected to any other Leaf Switch in the fabric is destined, in the underlay, to the NVE Anycast IP address (10.12.12.12) own simultaneously by both Leaf Switches in vPC (Switch Leaf A and Switch Leaf B). This is to take advantage of all Leaf-to-Spine uplinks with the use of Equal Cost Multi-Path (ECMP) Routing. In this scenario, after passing through the Spine, VXLAN frames destined to Host-A can hash to Leaf B which has no direct connection to Host-A. The system `nve infra-vlans` and backup Routing is required for the traffic to traverse the vPC peer-link.

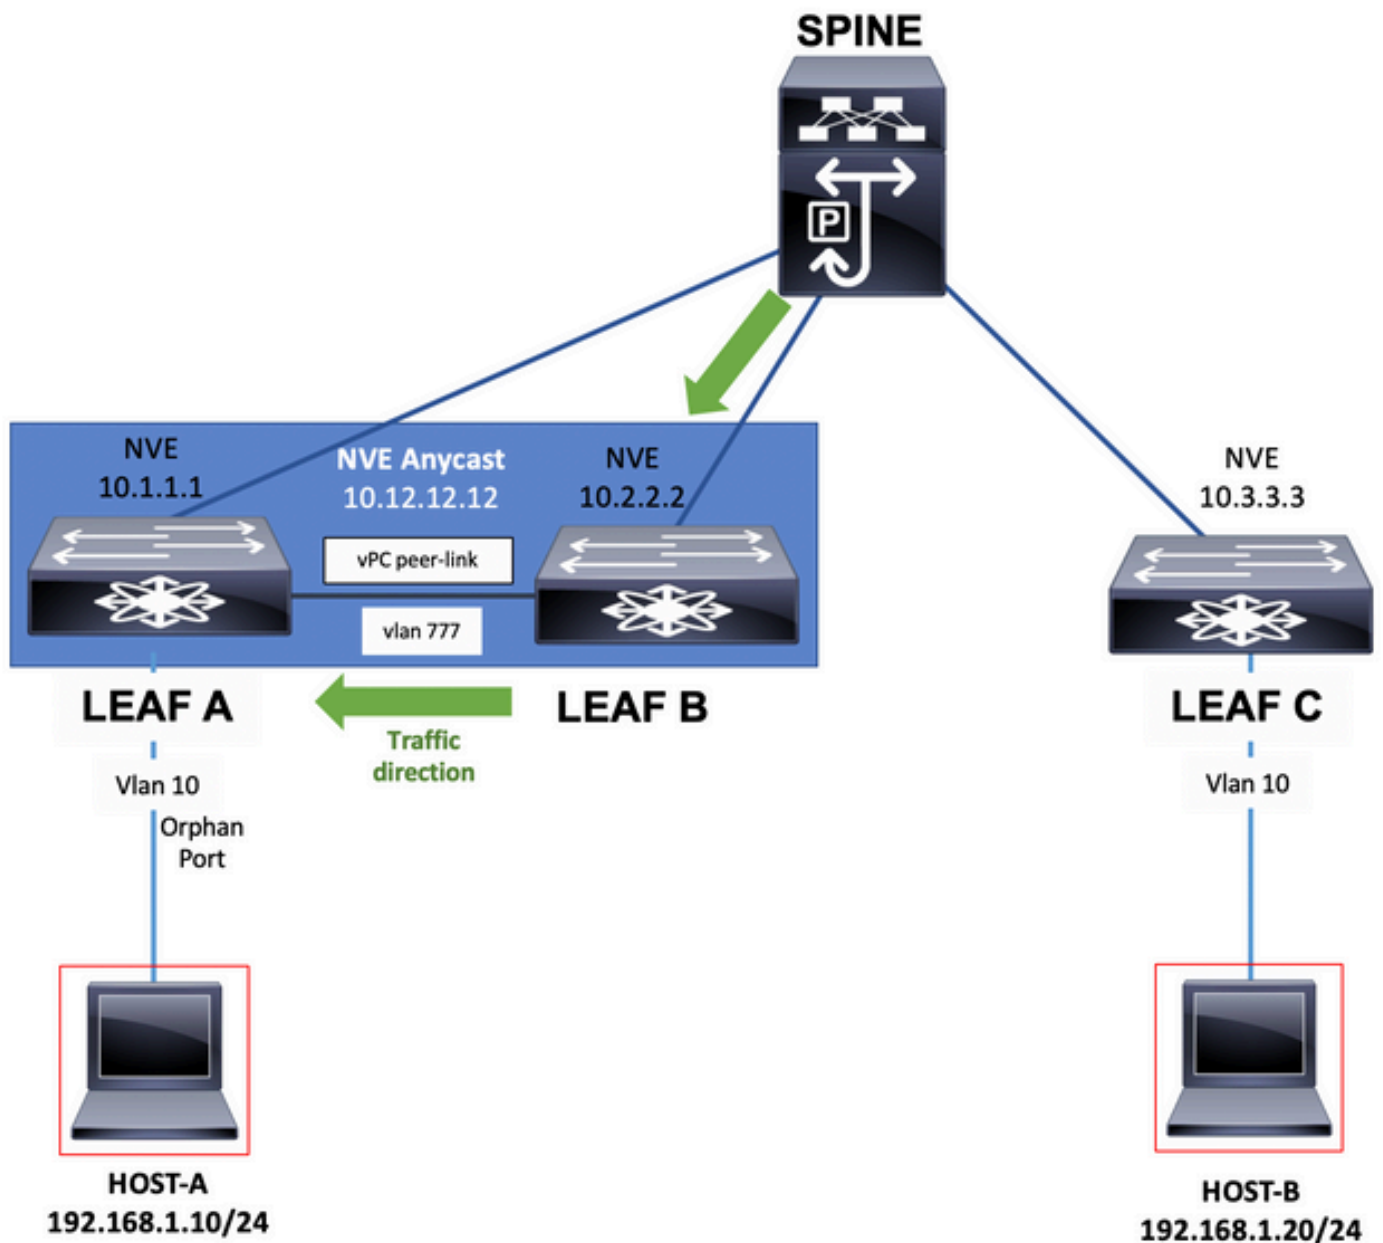

## Failure of uplink on a Leaf Switch in vPC

In this use case, the end-host (Host-A) inside the fabric is dual homed to both Cisco Nexus 9000 VXLAN Leaf Switches in a vPC domain. However, in case of failure of all the uplinks on any of the Leaf switches in vPC which can completely isolate it from the Spine switches, the system nve infra-vlans and backup Routing is required for the traffic to traverse the vPC peer-link which is now the only possible path towards the Spine. For instance, the diagram shows Host-A's traffic has hashed its frame to the isolated switch Leaf A. The frame now has to traverse the vPC peer-link.

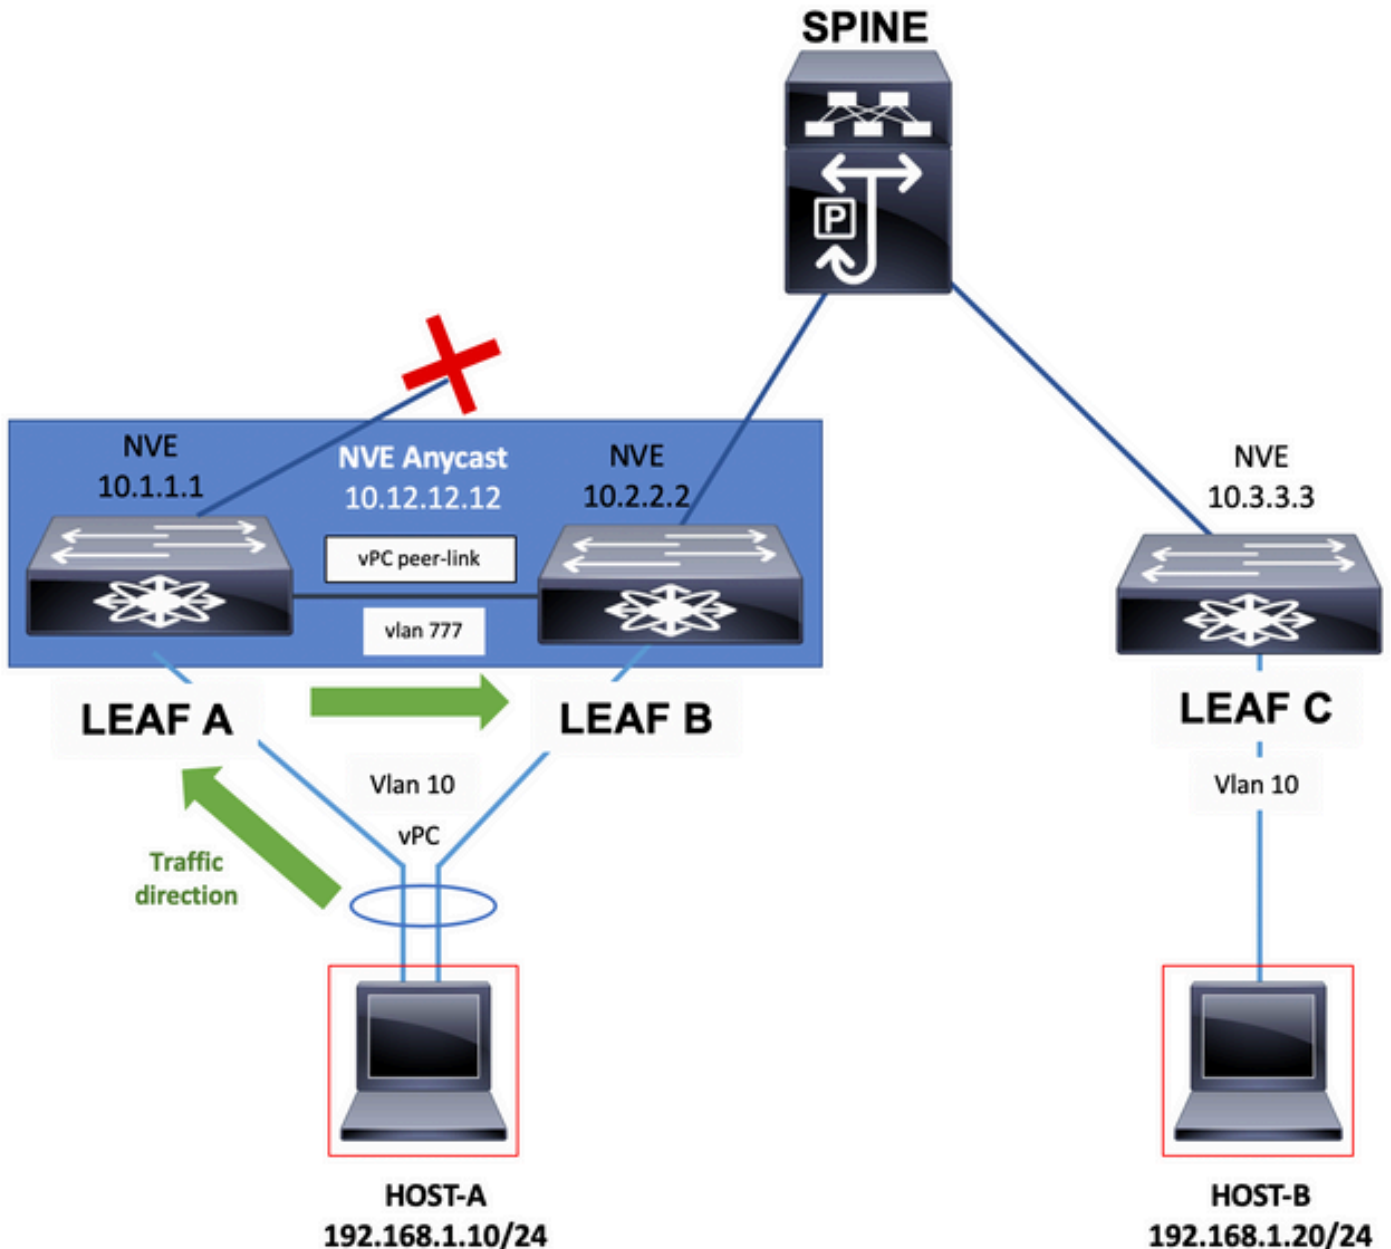

## Border Leaf Switches in vPC

Border Leaf switches which provide connectivity out of the VXLAN fabric by the exchange of network prefixes with External Routers, can be in vPC.


This connectivity to External Routers can abstractly be seen as connectivity to the WAN.

Border Leaf switches with connectivity to the WAN could end up single homed in the case of link failure. In such event the system nve infra-vlans and backup Routing is required for the traffic to traverse the vPC peer-link as shown in the next diagram.


---

**Note:** For the next examples, additionally to the VLAN in Global Routing Table, there must be a VLAN part of the Tenant-VRF which base the exchange of network prefixes with the use of Static Routes or a Routing Protocol between the Border Leaf switches over the vPC peer-link. This is required in order to populate the Tenant-VRF Routing Table.


---

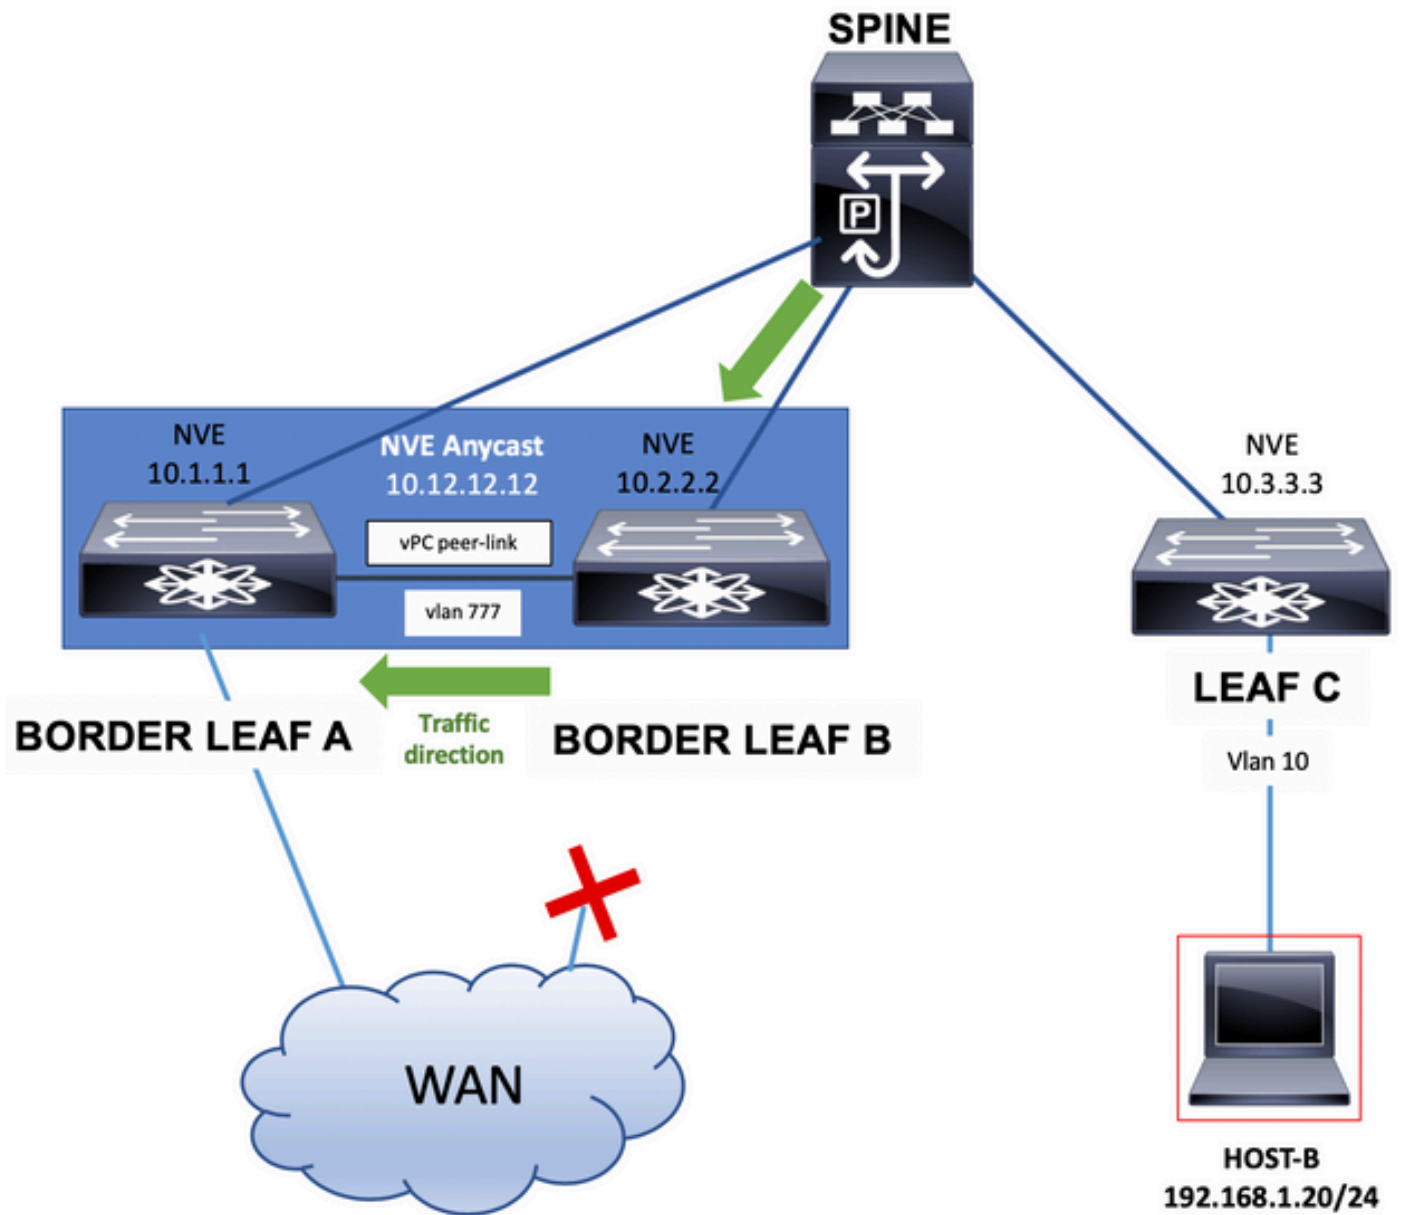

Border Leaf Switches can also advertise interface loopbacks over the vPC peer-link with the use of Static Routes or a Routing Protocol instantiated in a Tenant-VRF. This traffic will be carried over the vPC peer-link as well.

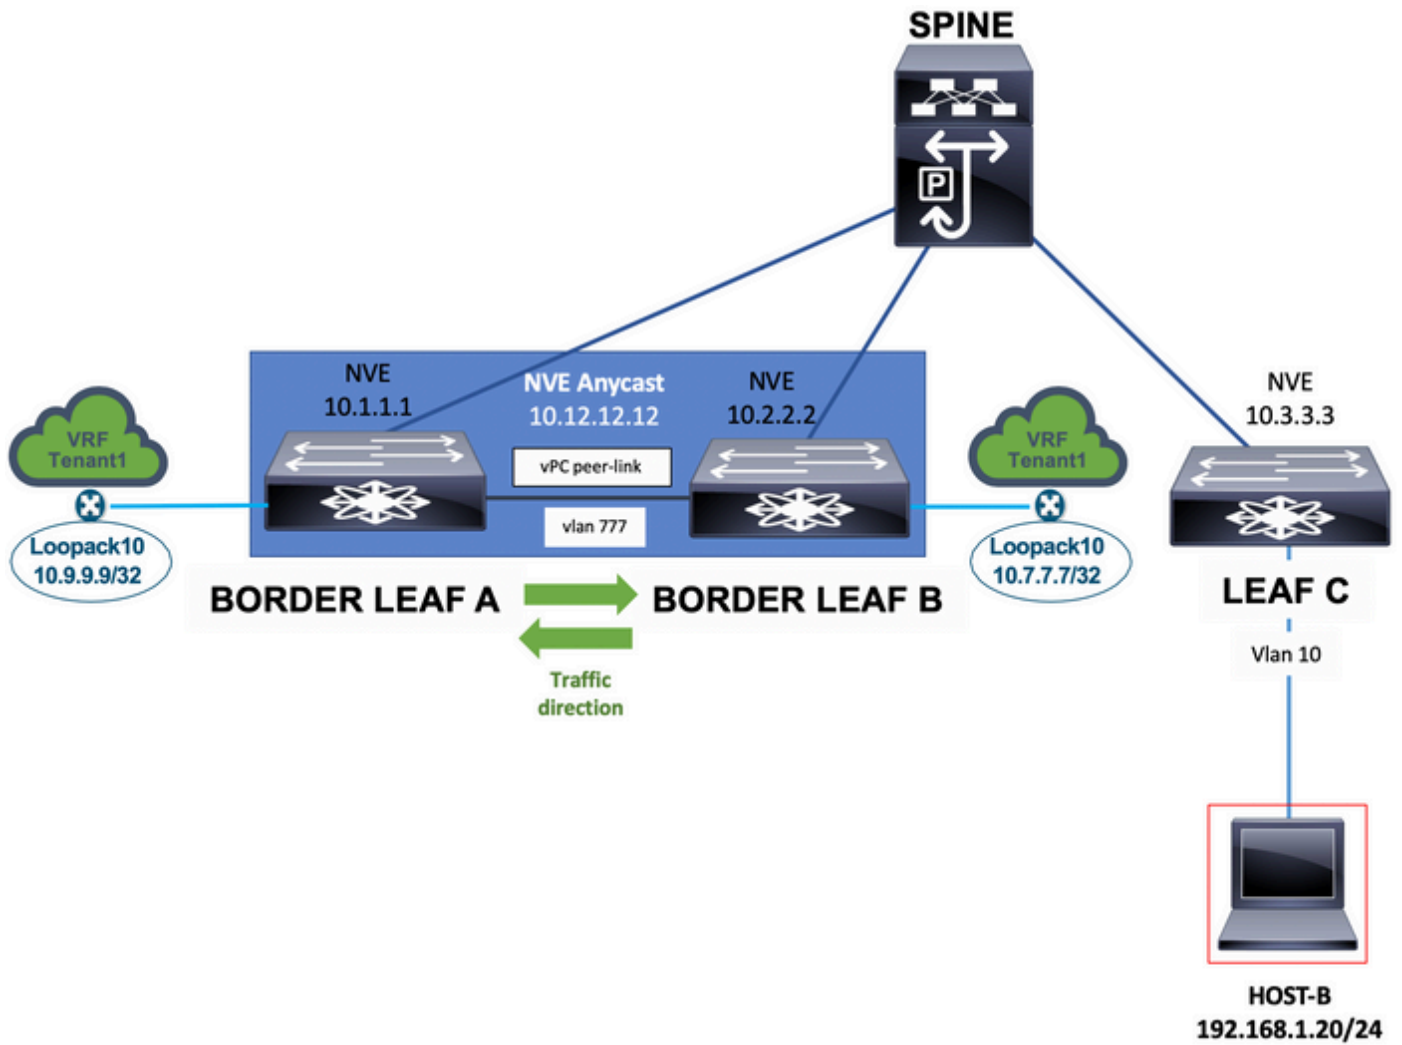


Finally, External Routers single home connected to Border Leaf switches can advertise network prefixes which can be required to have the vPC peer-link in the path of the network traffic as seen in the next diagram.

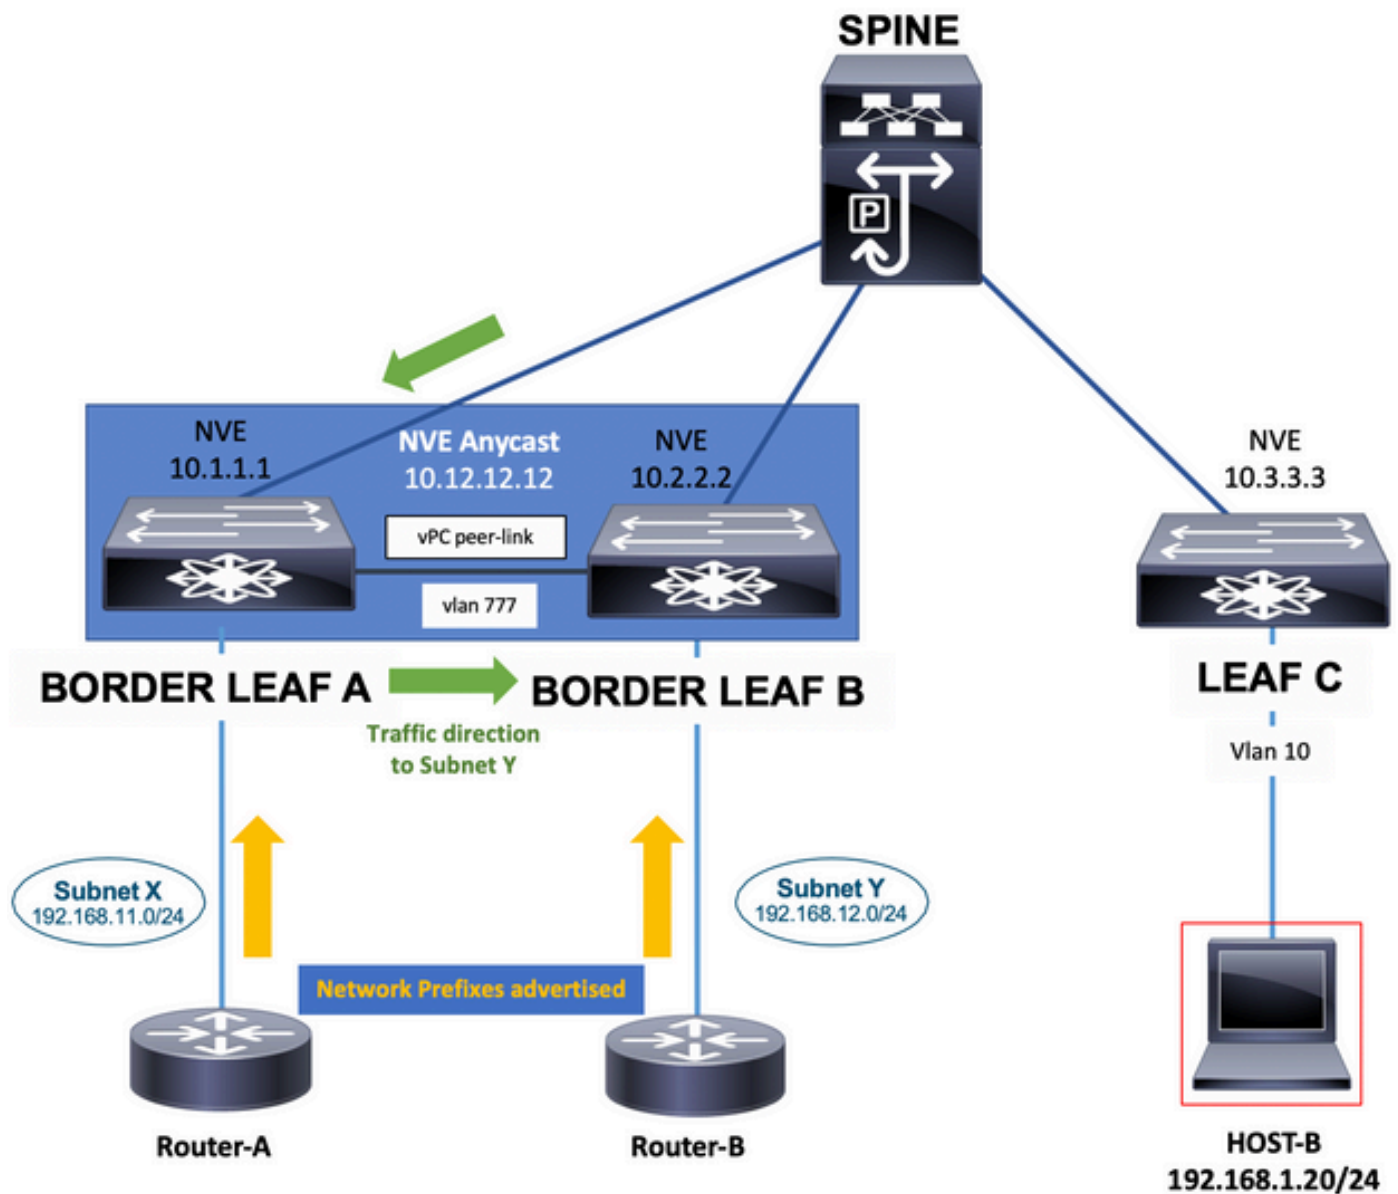

## Bud node

In the Bud node use case, there can be a Hardware or Software based VTEP connected to the Cisco Nexus 9000 VXLAN Leaf Switches. This VTEP can send to the Leaf Switches VXLAN encapsulated traffic. The VLAN used for connectivity with this Hardware or Software VTEP must be added to the system nve infra-vlans command.

In this case, it is VLAN 10 additionally to VLAN 777.

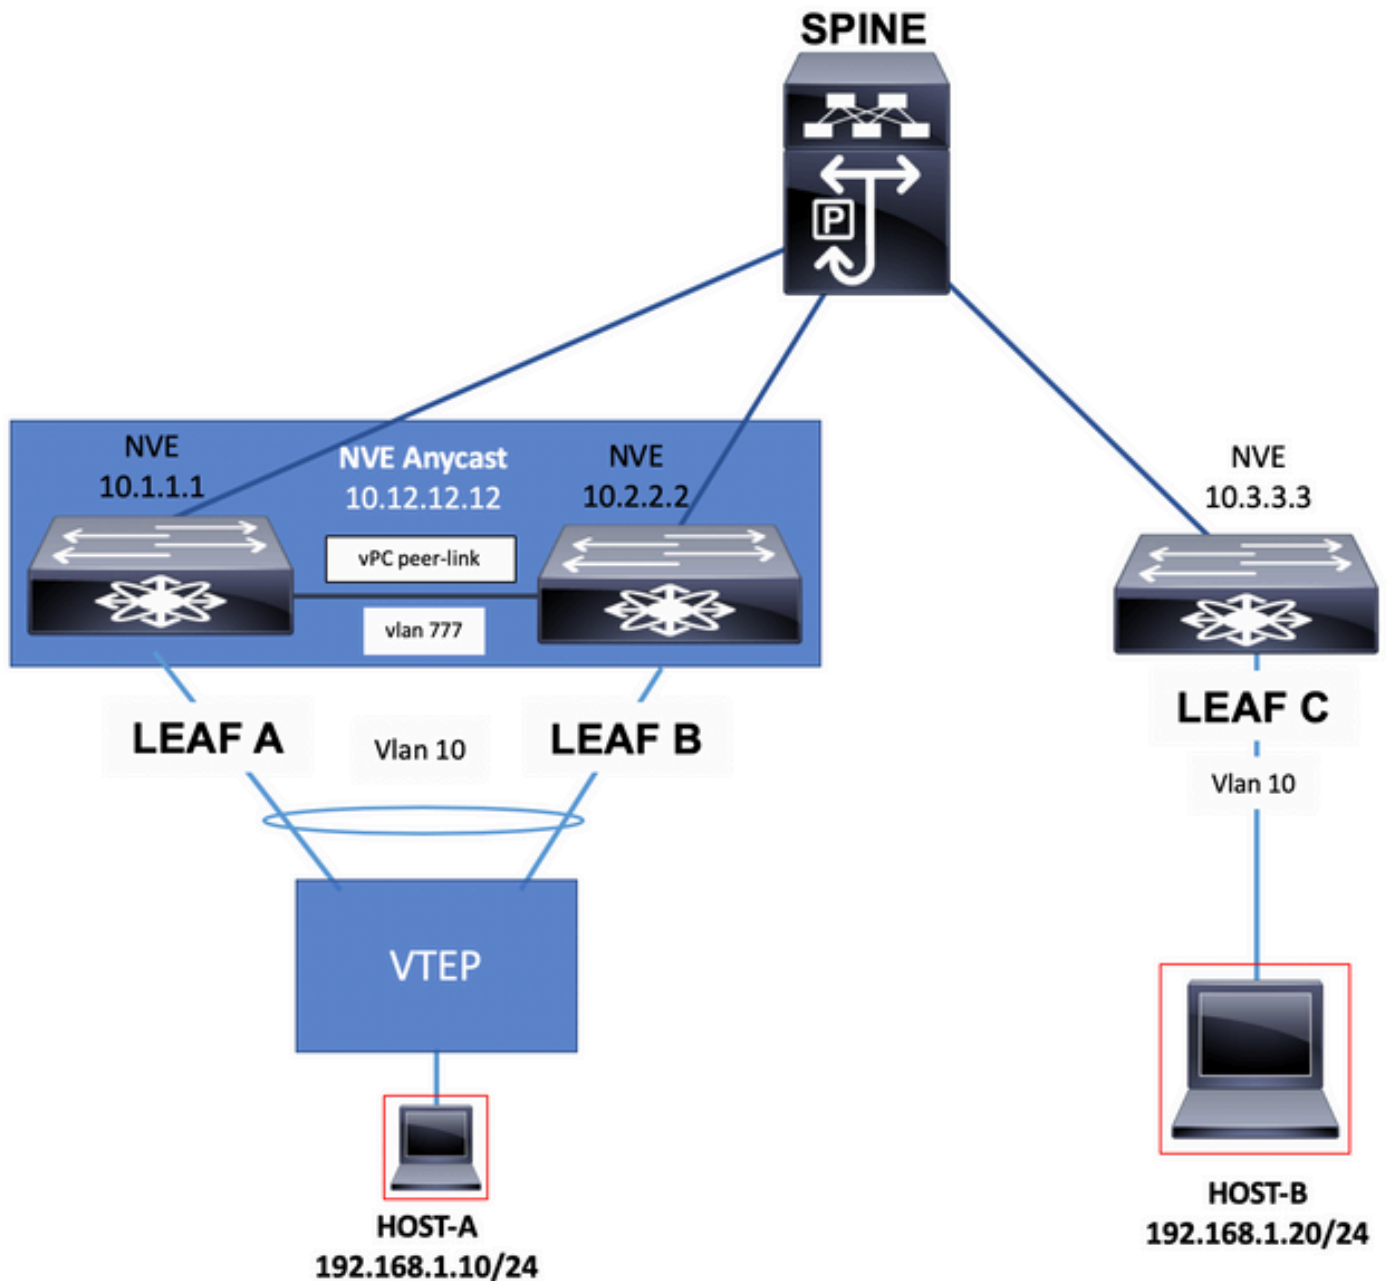


## Configure

In this scenario, LEAF A and LEAF B are VTEPs in vPC.

Vlan 777 has been chosen to participate in the underlay Routing Protocol which in this case is Open Shortest Path First (OSPF).


On each LEAF A and LEAF B switches, OSPF has formed an adjacency with the SPINE switch over the uplink and between them over the vPC peer-link.

OSPF or Intermediate System-to-Intermediate System (IS-IS) can be the Routing Protocol in use in the underlay.

 **Note:** No **vn-segment** command is configured under **vlan 777** configuration section. This indicates the vlan is not stretched across the VXLAN fabric and it is local in the Switches.



Add the **system nve infra-vlans** command in global configuration mode and chose vlan 777 since it is the vlan used for the underlay OSPF adjacency.

 **Note:** The **system nve infra-vlans** is only required on Nexus 9000 with CloudScale ASIC.

## LEAF A

<#root>

LEAF\_A# show ip ospf neighbors

```
OSPF Process ID 1 VRF default
Total number of neighbors: 2
Neighbor ID      Pri State           Up Time  Address      Interface
10.255.255.254   1 FULL/ -         00:02:52 10.255.255.254 Eth1/6
10.255.255.2     1 FULL/ -         02:16:10 10.1.2.2     Vlan777
```

LEAF\_A#

LEAF\_A# show running-config vlan 777

```
!Command: show running-config vlan 777
!Running configuration last done at: Tue Jul 16 19:45:24 2019
!Time: Tue Jul 16 19:48:46 2019
```

```
version 7.0(3)I7(6) Bios:version 07.65
vlan 777
vlan 777
  name BACKUP_VLAN_ROUTING_NVE_INFRA
```

LEAF\_A#

LEAF\_A# show running-config interface vlan 777

```
!Command: show running-config interface Vlan777
!Running configuration last done at: Tue Jul 16 19:45:24 2019
!Time: Tue Jul 16 19:46:33 2019
```

```
version 7.0(3)I7(6) Bios:version 07.65
```

```
interface Vlan777
  no shutdown
  no ip redirects
  ip address 10.1.2.1/24
  no ipv6 redirects
  ip ospf network point-to-point
  ip router ospf 1 area 0.0.0.0
```

LEAF\_A#

LEAF\_A# configure terminal

Enter configuration commands, one per line. End with CNTL/Z.

LEAF\_A(config)#

```
system nve infra-vlans
```

?

<1-3967> VLAN ID 1-4094 or range(s): 1-5, 10 or 2-5,7-19 (The range of vlans configured must not exc

```
LEAF_A(config)#
system nve infra-vlans

777
LEAF_A(config)#
```

## LEAF B

```
<#root>
LEAF_B# show ip ospf neighbors
OSPF Process ID 1 VRF default
Total number of neighbors: 2
Neighbor ID      Pri State           Up Time  Address      Interface
10.255.255.254   1 FULL/ -         02:21:53 10.255.255.254 Eth1/5
10.255.255.1     1 FULL/ -         02:13:51 10.1.2.1     Vlan777
LEAF_B#

LEAF_B# show running-config vlan 777

!Command: show running-config vlan 777
!Running configuration last done at: Tue Jul 16 18:17:29 2019
!Time: Tue Jul 16 19:49:19 2019

version 7.0(3)I7(6) Bios:version 07.65
vlan 777
vlan 777
  name BACKUP_VLAN_ROUTING_NVE_INFRA

LEAF_B#

LEAF_B# sh running-config interface vlan 777

!Command: show running-config interface Vlan777
!Running configuration last done at: Tue Jul 16 18:17:29 2019
!Time: Tue Jul 16 19:48:14 2019

version 7.0(3)I7(6) Bios:version 07.65

interface Vlan777
  no shutdown
  no ip redirects
  ip address 10.1.2.2/24
  no ipv6 redirects
  ip ospf network point-to-point
  ip router ospf 1 area 0.0.0.0


LEAF_B#

LEAF_B# configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
```


```

LEAF_B(config)#
system nve infra-vlans
?
<1-3967> VLAN ID 1-4094 or range(s): 1-5, 10 or 2-5,7-19 (The range of vlans configured must not exc
LEAF_B(config)#
system nve infra-vlans
777
LEAF_B(config)#

```

 **Note:** You must not configure certain combinations of infra-VLANs. For example, 2 and 514, 10 and 522, which are 512 apart.

## Network Diagram

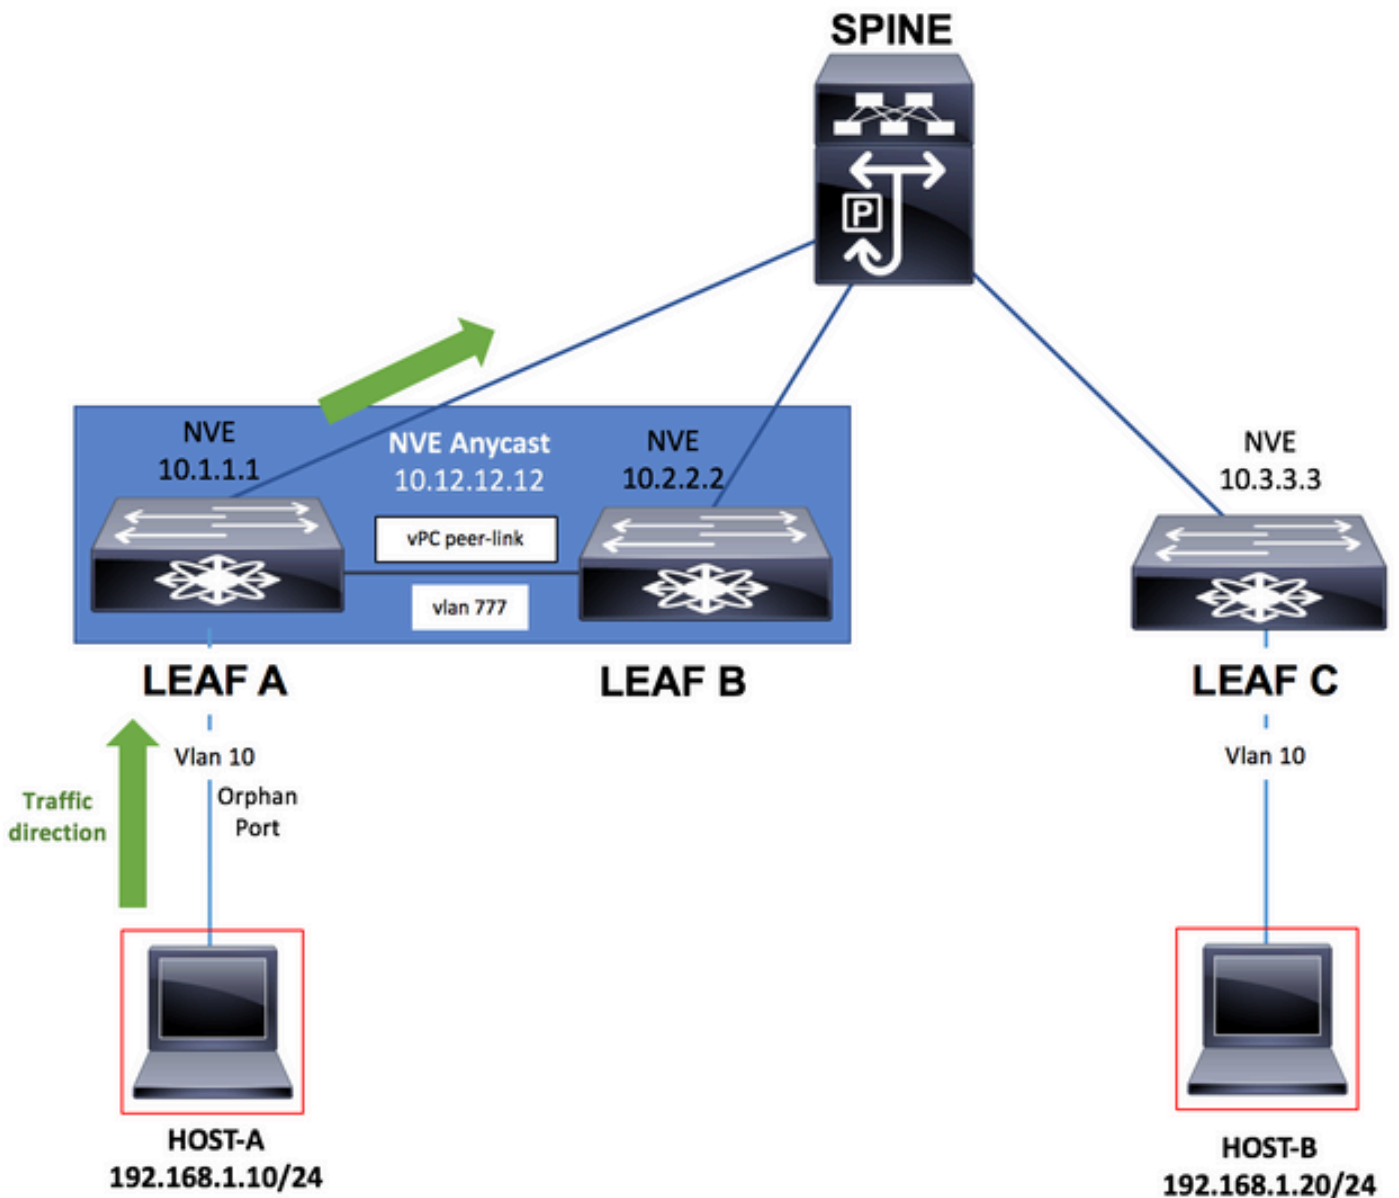

## Configurations

### LEAF A

```
configure terminal
!
hostname LEAF_A
!
nv overlay evpn
feature ospf
feature bgp
feature interface-vlan
feature vn-segment-vlan-based
feature nv overlay
feature vpc
feature lacp
!
vlan 10
  name VLAN_10_VRF_RED
  vn-segment 1000
vlan 100
  name L3_VNI_VRF_RED
  vn-segment 10000
vlan 777
  name BACKUP_VLAN_ROUTING_NVE_INFRA
!
vpc domain 1
  peer-keepalive destination 10.82.140.99 source 10.82.140.98 vrf management
  peer-switch
  peer-gateway
  layer3 peer-router
!
interface Ethernet1/1
  switchport
  switchport mode trunk
  channel-group 1 mode active
  no shutdown
!
interface Port-Channel1
  vpc peer-link
  no shutdown
!
interface Vlan777
  no shutdown
  no ip redirects
  ip address 10.1.2.1/24
  no ipv6 redirects
  ip ospf network point-to-point
  ip router ospf 1 area 0.0.0.0
!
fabric forwarding anycast-gateway-mac 000a.000b.000c
!
vrf context RED
  vni 10000
  rd auto
  address-family ipv4 unicast
    route-target both auto
  route-target both auto evpn
```

```
!  
interface Ethernet1/6  
  description TO SPINE  
  no switchport  
  medium p2p  
  ip unnumbered loopback1  
  ip ospf network point-to-point  
  ip router ospf 1 area 0.0.0.0  
  no shutdown  
!  
interface Ethernet1/54  
  description TO HOST-A  
  switchport  
  switchport access vlan 10  
  spanning-tree port type edge  
  no shutdown  
!  
interface loopback0  
  description NVE LOOPBACK  
  ip address 10.1.1.1/32  
  ip address 10.12.12.12/32 secondary  
  ip router ospf 1 area 0.0.0.0  
  
interface loopback1  
  description OSPF & BGP ID  
  ip address 10.255.255.1/32  
  ip router ospf 1 area 0.0.0.0  
!  
interface Vlan100  
  no shutdown  
  vrf member RED  
  no ip redirects  
  ip forward  
  no ipv6 redirects  
!  
interface Vlan10  
  no shutdown  
  vrf member RED  
  ip address 192.168.1.1/24  
  fabric forwarding mode anycast-gateway  
!  
interface nve1  
  host-reachability protocol bgp  
  source-interface loopback0  
  member vni 1000  
    ingress-replication protocol bgp  
  member vni 10000 associate-vrf  
  no shutdown  
!  
router ospf 1  
  router-id 10.255.255.1  
!  
router bgp 65535  
  router-id 10.255.255.1  
  address-family ipv4 unicast  
  address-family l2vpn evpn  
  neighbor 10.255.255.254  
    remote-as 65535  
  update-source loopback1  
  address-family ipv4 unicast  
  address-family l2vpn evpn  
    send-community
```

```
    send-community extended
vrf RED
    address-family ipv4 unicast
        advertise l2vpn evpn
!
evpn
    vni 1000 12
        rd auto
        route-target import auto
        route-target export auto
!
end
```

## LEAF B

```
configure terminal
!
hostname LEAF_B
!
nv overlay evpn
feature ospf
feature bgp
feature interface-vlan
feature vn-segment-vlan-based
feature nv overlay
feature vpc
feature lacp
!
vlan 10
    name VLAN_10_VRF_RED
    vn-segment 1000
vlan 100
    name L3_VNI_VRF_RED
    vn-segment 10000
vlan 777
    name BACKUP_VLAN_ROUTING_NVE_INFRA
!
vpc domain 1
    peer-keepalive destination 10.82.140.98 source 10.82.140.99 vrf management
    peer-switch
    peer-gateway
    layer3 peer-router
!
interface Ethernet1/1
    switchport
    switchport mode trunk
    channel-group 1 mode active
    no shutdown
!
interface Port-Channel1
    vpc peer-link
    no shutdown
!
interface Vlan777
    no shutdown
    no ip redirects
    ip address 10.1.2.2/24
```

```
no ipv6 redirects
ip ospf network point-to-point
ip router ospf 1 area 0.0.0.0
!
fabric forwarding anycast-gateway-mac 000a.000b.000c
!
vrf context RED
vni 10000
rd auto
address-family ipv4 unicast
route-target both auto
route-target both auto evpn
!
interface Ethernet1/5
description TO SPINE
no switchport
medium p2p
ip unnumbered loopback1
ip ospf network point-to-point
ip router ospf 1 area 0.0.0.0
no shutdown
!
interface loopback0
description NVE LOOPBACK
ip address 10.2.2.2/32
ip address 10.12.12.12/32 secondary
ip router ospf 1 area 0.0.0.0

interface loopback1
description OSPF & BGP ID
ip address 10.255.255.2/32
ip router ospf 1 area 0.0.0.0
!
interface Vlan100
no shutdown
vrf member RED
no ip redirects
ip forward
no ipv6 redirects
!
interface Vlan10
no shutdown
vrf member RED
ip address 192.168.1.1/24
fabric forwarding mode anycast-gateway
!
interface nve1
host-reachability protocol bgp
source-interface loopback0
member vni 1000
ingress-replication protocol bgp
member vni 10000 associate-vrf
no shutdown
!
router ospf 1
router-id 10.255.255.2
!
router bgp 65535
router-id 10.255.255.2
address-family ipv4 unicast
address-family l2vpn evpn
neighbor 10.255.255.254
```

```
remote-as 65535
update-source loopback1
address-family ipv4 unicast
address-family l2vpn evpn
    send-community
    send-community extended
vrf RED
    address-family ipv4 unicast
    advertise l2vpn evpn
!
evpn
vni 1000 12
    rd auto
    route-target import auto
    route-target export auto
!
end
```

### LEAF C

```
configure terminal
!
hostname LEAF_C
!
nv overlay evpn
feature ospf
feature bgp
feature interface-vlan
feature vn-segment-vlan-based
feature nv overlay
!
vlan 10
    name VLAN_10_VRF_RED
    vn-segment 1000
vlan 100
    name L3_VNI_VRF_RED
    vn-segment 10000
vlan 777
    name BACKUP_VLAN_ROUTING_NVE_INFRA
!
fabric forwarding anycast-gateway-mac 000a.000b.000c
!
vrf context RED
vni 10000
    rd auto
    address-family ipv4 unicast
        route-target both auto
        route-target both auto evpn
!
interface Ethernet1/1
    description TO SPINE
    no switchport
    medium p2p
    ip unnumbered loopback1
    ip ospf network point-to-point
    ip router ospf 1 area 0.0.0.0
    no shutdown
!
interface Ethernet1/49
```



```
description TO HOST-A
switchport
switchport access vlan 10
spanning-tree port type edge
no shutdown
!
interface loopback0
description NVE LOOPBACK
ip address 10.3.3.3/32
ip router ospf 1 area 0.0.0.0
!
interface loopback1
description OSPF & BGP ID
ip address 10.255.255.3/32
ip router ospf 1 area 0.0.0.0
!
interface Vlan100
no shutdown
vrf member RED
no ip redirects
ip forward
no ipv6 redirects
!
interface Vlan10
no shutdown
vrf member RED
ip address 192.168.1.1/24
fabric forwarding mode anycast-gateway
!
interface nve1
host-reachability protocol bgp
source-interface loopback0
member vni 1000
  ingress-replication protocol bgp
member vni 10000 associate-vrf
no shutdown
!
router ospf 1
router-id 10.255.255.3
!
router bgp 65535
router-id 10.255.255.3
address-family ipv4 unicast
address-family l2vpn evpn
neighbor 10.255.255.254
  remote-as 65535
  update-source loopback1
address-family ipv4 unicast
address-family l2vpn evpn
  send-community
  send-community extended
vrf RED
  address-family ipv4 unicast
  advertise l2vpn evpn
!
evpn
vni 1000 l2
rd auto
route-target import auto
route-target export auto
!
end
```

## SPINE

```
configure terminal
!
hostname SPINE
!
nv overlay evpn
feature ospf
feature bgp
feature nv overlay
!
interface Ethernet1/5
  description TO LEAF A
  no switchport
  medium p2p
  ip unnumbered loopback1
  ip ospf network point-to-point
  ip router ospf 1 area 0.0.0.0
  no shutdown
!
interface Ethernet1/6
  description TO LEAF B
  no switchport
  medium p2p
  ip unnumbered loopback1
  ip ospf network point-to-point
  ip router ospf 1 area 0.0.0.0
  no shutdown
!
interface Ethernet1/1
  description TO LEAF C
  no switchport
  medium p2p
  ip unnumbered loopback1
  ip ospf network point-to-point
  ip router ospf 1 area 0.0.0.0
  no shutdown
!
interface loopback1
  description OSPF & BGP ID
  ip address 10.255.255.254/32
  ip router ospf 1 area 0.0.0.0
!
router ospf 1
  router-id 10.255.255.254
!
router bgp 65535
  router-id 10.255.255.254
  address-family ipv4 unicast
  address-family l2vpn evpn
    retain route-target all
  neighbor 10.255.255.1
    remote-as 65535
  update-source loopback1
  address-family ipv4 unicast
  address-family l2vpn evpn
    send-community
```

```
    send-community extended
    route-reflector-client
neighbor 10.255.255.2
  remote-as 65535
  update-source loopback1
  address-family ipv4 unicast
  address-family l2vpn evpn
  send-community
    send-community extended
    route-reflector-client
neighbor 10.255.255.3
  remote-as 65535
  update-source loopback1
  address-family ipv4 unicast
  address-family l2vpn evpn
  send-community
    send-community extended
    route-reflector-client
!
end
```

## Verify


Run the command **show system nve infra-vlans** and ensure the vlan is shown under **Currently active infra Vlans**.

### LEAF A

```
LEAF_A# show system nve infra-vlans
Currently active infra Vlans: 777
Available Infra Vlans : 7-264,266-511,519-776,778-1023,1031-1288,1290-1535,1543-1800,1802-2047,2055-231
*Configuration of two infra-vlans which are 512 apart is not allowed. Ex: 4, 516 are not allowed to be
LEAF_A#
```


### LEAF B

```
LEAF_B# show system nve infra-vlans
Currently active infra Vlans: 777
Available Infra Vlans : 7-264,266-511,519-776,778-1023,1031-1288,1290-1535,1543-1800,1802-2047,2055-231
*Configuration of two infra-vlans which are 512 apart is not allowed. Ex: 4, 516 are not allowed to be
LEAF_B#
```

 **Note:** Layer 3 physical interfaces is the recommendation to be used as uplinks to transport VXLAN traffic in the fabric. Layer 3 sub-interfaces are not supported. To use interface vlans to transport VXLAN traffic, ensure the vlan is also identified with the command **system nve infra-vlans** over the vPC peer-link.

# Troubleshoot

In the event that LEAF A switch suffers from an uplink failure and it no longer connects directly to the SPINE switch, reachability can still be accomplished with the infra-vlan over the vPC peer-link used as a backup uplink towards the SPINE switch.

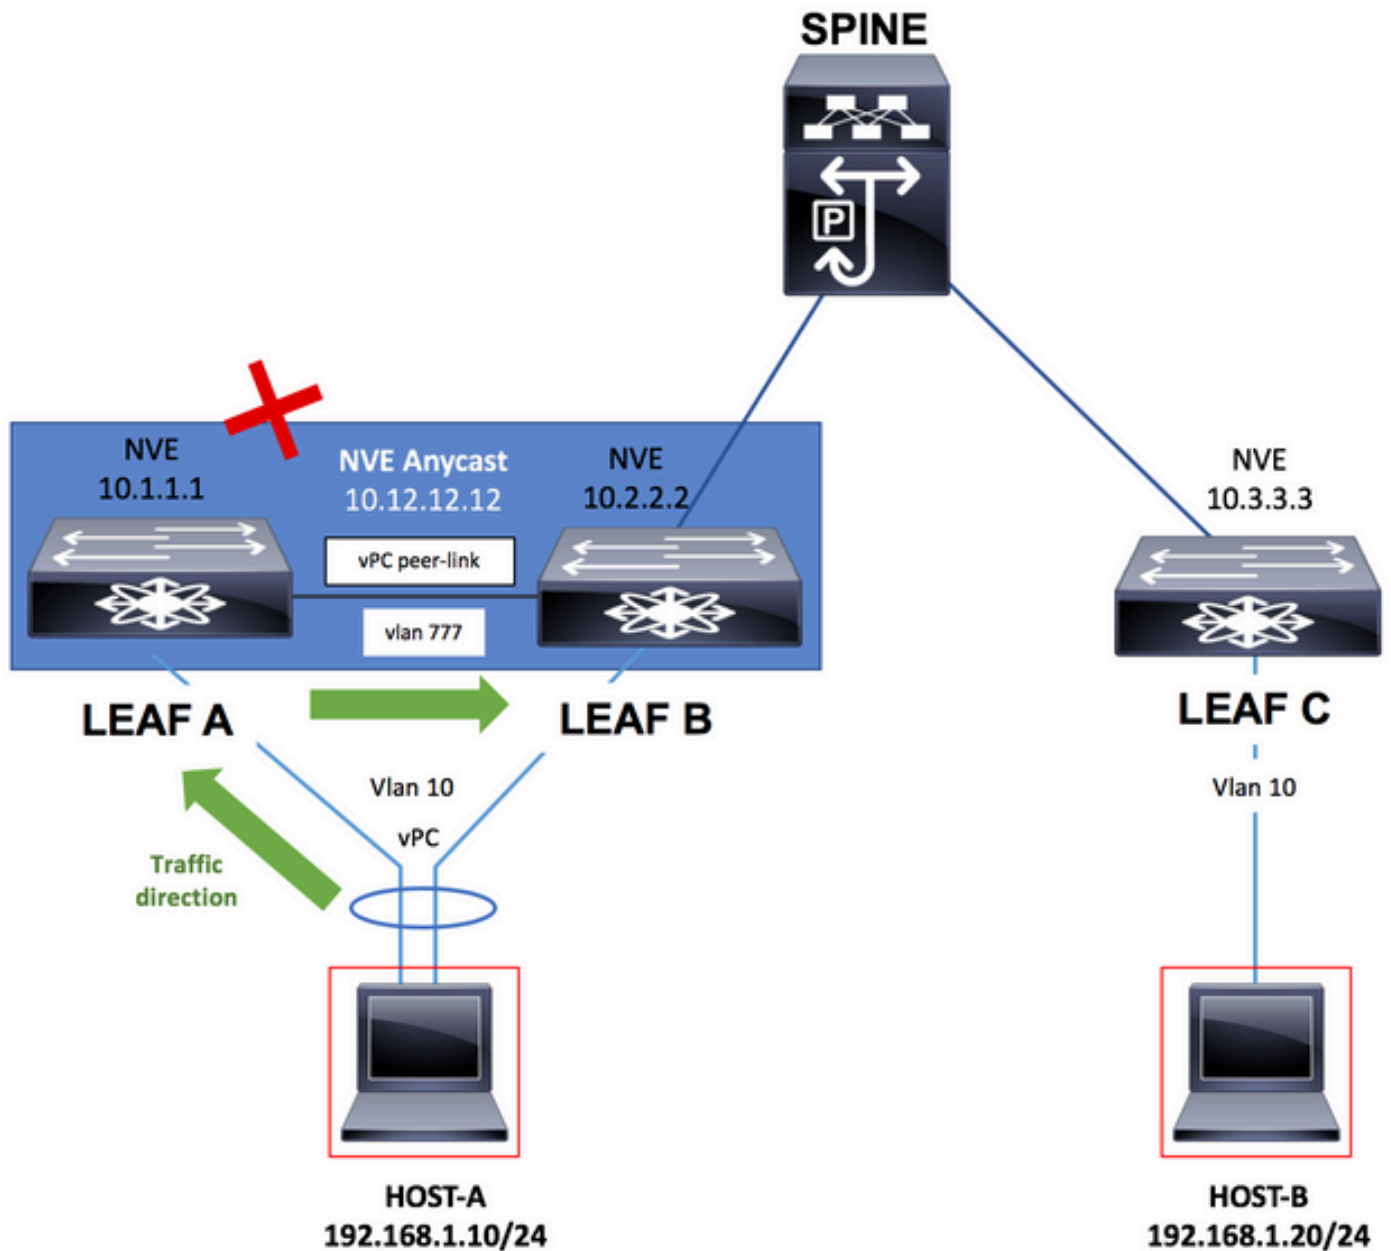

## LEAF A

```
<#root>
```

```
LEAF_A# show mac address-table vlan 10
```

```
Legend:
```

\* - primary entry, G - Gateway MAC, (R) - Routed MAC, O - Overlay MAC  
age - seconds since last seen, + - primary entry using vPC Peer-Link,  
(T) - True, (F) - False, C - ControlPlane MAC, ~ - vsan

VLAN	MAC Address	Type	age	Secure	NTFY Ports
------	-------------	------	-----	--------	------------

* 10	0000.0000.000a	dynamic	0	F	F Eth1/54
------	----------------	---------	---	---	-----------

```
C 10 0000.0000.000b dynamic 0 F F
nve1(10.3.3.3)
G 10 00be.755b.f1b7 static - F F sup-eth1(R)
G 10 4c77.6db9.a8db static - F F vPC Peer-Link(R)
LEAF_A#

LEAF_A# show ip route
10.3.3.3

IP Route Table for VRF "default"
'*' denotes best ucast next-hop
 '**' denotes best mcast next-hop
 '[x/y]' denotes [preference/metric]
 '%<string>' in via output denotes VRF <string>

10.3.3.3/32, ubest/mbest: 1/0
   *via 10.1.2.2,

vlan777

, [110/49], 00:01:39, ospf-1, intra
LEAF_A#

LEAF_A# show system nve infra-vlans

Currently active infra vlans: 777

Available Infra Vlans : 7-264,266-511,519-776,778-1023,1031-1288,1290-1535,1543-1800,1802-2047,2055-2311
*Configuration of two infra-vlans which are 512 apart is not allowed. Ex: 4, 516 are not allowed to be
LEAF_A#
```