

Configurer PPPoE sur BDI sur les routeurs de la gamme ASR1k

Contenu

[Introduction](#)

[Conditions préalables](#)

[Conditions requises](#)

[Components Used](#)

[Configuration](#)

[Diagramme du réseau](#)

[Vérification](#)

[Dépannage](#)

[Informations connexes](#)

Introduction

Ce document décrit comment configurer le serveur PPPoE (Point-to-Point Protocol over Ethernet) avec l'interface de domaine de pont (BDI) et la plage de VLAN.

Conditions préalables

Conditions requises

Cisco vous recommande de prendre connaissance des rubriques suivantes :

- La connectivité de bout en bout de la couche 1 est correcte
- Les notions de base de PPP et de PPPoE sont bien comprises

Components Used

Les informations contenues dans ce document sont basées sur les versions de matériel et de logiciel suivantes :

- HÔTE 1 - CISCO887G
- HÔTE 2 - CISCO887
- COMMUTATEUR - WS-C3560-24TS-S
- SERVEUR PPPoE - ASR1001-X

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Configuration

Note: Utilisez l'[Outil de recherche de commande \(clients inscrits seulement\)](#) pour obtenir plus d'informations sur les commandes utilisées dans cette section.

HÔTE 1

```
!  
interface FastEthernet0  
  switchport access vlan 100  
  no ip address  
end  
  
!  
  
interface Vlan100  
  no ip address  
  pppoe enable group global  
  pppoe-client dial-pool-number 1  
end  
  
!  
  
interface Dialer1  
  ip address negotiated  
  encapsulation ppp  
  dialer pool 1  
  ppp chap hostname dsl  
  ppp chap password 0 dsl  
end
```

HÔTE 2

```
!  
  
interface FastEthernet0  
  switchport access vlan 200  
  no ip address  
end  
  
!  
  
!  
interface Vlan200  
  no ip address  
  pppoe enable group global  
  pppoe-client dial-pool-number 1  
end  
  
!  
  
!  
interface Dialer1  
  ip address negotiated  
  encapsulation ppp  
  dialer pool 1  
  ppp chap hostname dsl  
  ppp chap password 0 dsl  
end
```

!

COMMUTATEUR

SWITCH#sh cdp neighbors

Capability Codes: R - Router, T - Trans Bridge, B - Source Route Bridge
S - Switch, H - Host, I - IGMP, r - Repeater, P - Phone,
D - Remote, C - CVTA, M - Two-port Mac Relay

Device ID	Local Intrfce	Holdtme	Capability	Platform	Port ID
SERVER	Gig 0/1	130	R I	ASR1001-X	Gig 0/0/0
HOST-1	Fas 0/2	141	R B S I	887G	Fas 0
HOST-2	Fas 0/1	167	R B S I	887	Fas 0

!

```
interface FastEthernet0/2
  switchport access vlan 100
end
```

!

```
interface FastEthernet0/1
  switchport access vlan 200
end
```

!

```
interface GigabitEthernet0/1
  switchport trunk encapsulation dot1q
  switchport trunk allowed vlan 100,200
  switchport mode trunk
end
```

!

SERVEUR PPPoE

!

```
username dsl password 0 dsl
```

!

```
bba-group pppoe global
  virtual-template 1
```

!

```
interface GigabitEthernet0/0/0
  no ip address
  negotiation auto
  cdp enable
  service instance 100 ethernet
  encapsulation dot1q 100 etype pppoe-all
  rewrite ingress tag pop 1 symmetric
  bridge-domain 100
```

!

```
service instance 200 ethernet
  encapsulation dot1q 200 etype pppoe-all
  rewrite ingress tag pop 1 symmetric
  bridge-domain 200
```

!

```

!
interface Virtual-Template1
 ip unnumbered Loopback0
 peer default ip address pool POOL
 ppp authentication chap
!
interface BDI100
 no ip address
 pppoe enable group global
!
interface BDI200
 no ip address
 pppoe enable group global
!
interface Loopback0
 ip address 192.168.10.1 255.255.255.255
end

!
ip local pool POOL 192.168.1.1 192.168.1.100

```

Vous pouvez également configurer 'vlan-range' comme indiqué :

```

!
interface GigabitEthernet0/0/0
 no ip address
 negotiation auto
 service instance 100 ethernet
 encapsulation default
 bridge-domain 1
!
end


```

```

!
interface BDI1
 no ip address
 vlan-range dot1q 1 4094
 pppoe enable group global
!
end

```

Diagramme du réseau

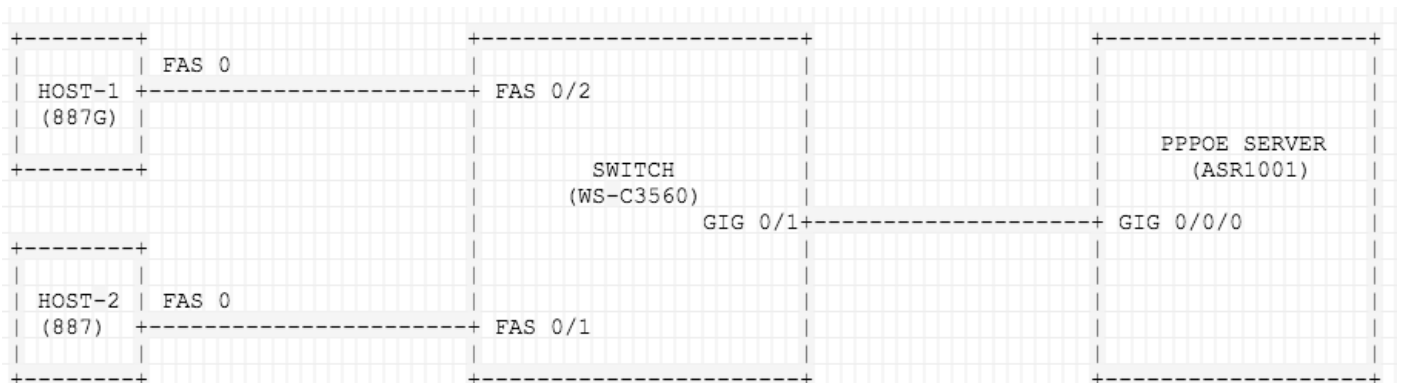

Vérification

Utilisez cette section pour confirmer que votre configuration fonctionne correctement.

Sur HÔTE-1

```
[HOST-1#show pppoe session
1 client session
```

Uniq ID	PPPoE SID	RemMAC LocMAC	Port	VT	VA VA-st Vi2	State Type
N/A	5	00a2.eee6.663f c471.fe93.d112	Vl100	Di1	Vi2 UP	UP

```
HOST-1#show ip interface brief | exclude un
```

Interface	IP-Address	OK?	Method	Status	Protocol
Dialer1	192.168.1.4	YES	IPCP	up	up

```
HOST-1#show caller ip
```

Line	User	IP Address	Local Number	Remote Number	<->
Vi2	SERVER	192.168.10.1	-	<unknown phone	in

```
HOST-1#ping 192.168.10.1
```

Type escape sequence to abort.

Sending 5, 100-byte ICMP Echos to 192.168.10.1, timeout is 2 seconds:

!!!!!

Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/4 ms

```
HOST-1#show ppp interface virtual-Access 2
```

PPP Serial Context Info

Interface : Vi2
PPP Serial Handle: 0x1F000003
PPP Handle : 0xB2000003
SSS Handle : 0x80000004
AAA ID : 24
Access IE : 0xA7000003
SHDB Handle : 0x0
State : Up
Last State : Binding
Last Event : LocalTerm

PPP Session Info

Interface : Vi2
PPP ID : 0xB2000003
Phase : UP
Stage : Local Termination
Peer Name : SERVER
Peer Address : 192.168.10.1
Control Protocols: LCP[Open] IPCP[Open] CDPCP[Stopped]
Session ID : 3
AAA Unique ID : 24
SSS Manager ID : 0x80000004
SIP ID : 0x1F000003
PPP_IN_USE : 0x11

```

Vi2 LCP: [Open]
Our Negotiated Options
Vi2 LCP:   MagicNumber 0x7735647E (0x05067735647E)
Peer's Negotiated Options
Vi2 LCP:   MRU 1500 (0x010405DC)
Vi2 LCP:   AuthProto CHAP (0x0305C22305)
Vi2 LCP:   MagicNumber 0xA7A011AC (0x0506A7A011AC)

```

```

Vi2 IPCP: [Open]
Our Negotiated Options
Vi2 IPCP:   Address 192.168.1.5 (0x0306C0A80105)
Peer's Negotiated Options
Vi2 IPCP:   Address 192.168.10.1 (0x0306C0A80A01)

```

Sur HÔTE-2

```

HOST-2#show pppoe session
1 client session

```

Uniq ID	PPPoE SID	RemMAC LocMAC	Port	VT	VA VA-st	State Type
N/A	6	00a2.eee6.663f e8b7.4886.b8ea	Vl200	Di1	Vi2 UP	UP

```

HOST-2#show ip interface brief | exclude un
Interface          IP-Address      OK? Method Status    Protocol
Dialer1            192.168.1.6    YES IPCP   up        up

```

```

HOST-2#show caller ip
Line      User      IP Address  Local Number  Remote Number  <->
Vi2      SERVER   192.168.10.1  -             <unknown phone in

```

```

HOST-2#ping 192.168.10.1
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.10.1, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/4 ms

```

```

HOST-2#show ppp interface virtual-Access 2
PPP Serial Context Info

```

```

-----
Interface          : Vi2
PPP Serial Handle: 0x7B00000A
PPP Handle         : 0xA000000A
SSS Handle        : 0x4C00000B
AAA ID            : 68
Access IE         : 0x1D00000A
SHDB Handle       : 0x0
State             : Up
Last State        : Binding
Last Event        : LocalTerm

```

```

PPP Session Info

```

```

-----
Interface          : Vi2
PPP ID             : 0xA000000A

```

```

Phase           : UP
Stage           : Local Termination
Peer Name       : SERVER
Peer Address    : 192.168.10.1
Control Protocols: LCP[Open] IPCP[Open] CDPCP[Stopped]
Session ID      : 10
AAA Unique ID   : 68
SSS Manager ID  : 0x4C00000B
SIP ID         : 0x7B00000A
PPP_IN_USE     : 0x11

```

```

Vi2 LCP: [Open]
Our Negotiated Options
Vi2 LCP:   MagicNumber 0x421AC8AB (0x0506421AC8AB)
Peer's Negotiated Options
Vi2 LCP:   MRU 1500 (0x010405DC)
Vi2 LCP:   AuthProto CHAP (0x0305C22305)
Vi2 LCP:   MagicNumber 0xA7A0942C (0x0506A7A0942C)

```

```

Vi2 IPCP: [Open]
Our Negotiated Options
Vi2 IPCP:   Address 192.168.1.6 (0x0306C0A80106)
Peer's Negotiated Options
Vi2 IPCP:   Address 192.168.10.1 (0x0306C0A80A01)

```

SUR LE COMMUTATEUR

```
SWITCH#show vlan brief
```

VLAN Name	Status	Ports
1 default	active	Fa0/4, Fa0/5, Fa0/6, Fa0/7 Fa0/8, Fa0/9, Fa0/10, Fa0/11 Fa0/12, Fa0/13, Fa0/14, Fa0/15 Fa0/16, Fa0/17, Fa0/18, Fa0/19 Fa0/20, Fa0/21, Fa0/22, Fa0/23 Fa0/24, Gi0/2
11 VLAN0011	active	
12 VLAN0012	active	
13 VLAN0013	active	
100 VLAN0100	active	Fa0/2
200 VLAN0200	active	Fa0/1

```
SWITCH#Show interface trunk
```

Port	Mode	Encapsulation	Status	Native vlan
Gi0/1	on	802.1q	trunking	1
Port	Vlans allowed on trunk			
Gi0/1	100,200			
Port	Vlans allowed and active in management domain			
Gi0/1	100,200			
Port	Vlans in spanning tree forwarding state and not pruned			
Gi0/1	100,200			

Sur le serveur PPPoE

```
SERVER#show pppoe session
      2 sessions in LOCALLY_TERMINATED (PTA) State
      2 sessions total
```

Uniq ID	PPPoE SID	RemMAC LocMAC	Port	VT	VA VA-st	State Type
5	5	c471.fe93.d112 00a2.eee6.663f	BD100	1	Vi2.2 UP	PTA
6	6	e8b7.4886.b8ea 00a2.eee6.663f	BD200	1	Vi2.1 UP	PTA

```
SERVER#show caller ip
```

Line	User	IP Address	Local Number	Remote Number	<->
Vi2.1	dsl	192.168.1.6	-	-	in
Vi2.2	dsl	192.168.1.5	-	-	in

```
SERVER#show ip local pool POOL
```

Pool	Begin	End	Free	In use
POOL	192.168.1.1	192.168.1.100	98	2

```
Available addresses:
```

```
192.168.1.7
192.168.1.8
192.168.1.9
```

```
.....
```

```
.....
```

Lorsque vous utilisez '**vlan-range**', notez le changement dans 'Port' :

```
SERVER#show pppoe session
      2 sessions in LOCALLY_TERMINATED (PTA) State
      2 sessions total
```

Uniq ID	PPPoE SID	RemMAC LocMAC	Port	VT	VA VA-st	State Type
7	7	c471.fe93.d112 00a2.eee6.663f	BD1 VLAN: 100	1	Vi2.1 UP	PTA
8	8	e8b7.4886.b8ea 00a2.eee6.663f	BD1 VLAN: 200	1	Vi2.2 UP	PTA

```
SERVER#show caller ip
```

Line	User	IP Address	Local Number	Remote Number	<->
Vi2.1	dsl	192.168.1.7	-	-	in
Vi2.2	dsl	192.168.1.8	-	-	in

Dépannage

Cette section fournit des informations que vous pouvez utiliser pour dépanner votre configuration.

Ces débogages seront utiles pour dépanner PPP/PPPoE.

- debug pppoe events
- debug pppoe errors

- debug ppp negotiation

Informations connexes

- [PPPoE sur BDI sur CISCO CSR 1000V](#)
- [Bogue d'amélioration - Termination PPPoE sur BDI et plage de VLAN sur ASR1k](#)
- [Support et documentation techniques - Cisco Systems](#)