

配置WAP131、WAP150、WAP351、WAP361、WAP371和WAP571的密码复杂性

目标

“密码复杂性”页用于修改用于访问配置实用程序的密码的复杂性要求。复杂的密码会提高安全性。

本文档旨在说明如何在WAP131、WAP150、WAP351、WAP361、WAP371和WAP571接入点上配置密码复杂性。

适用设备

- WAP131
- WAP150
- WAP351
- WAP361
- WAP371
- WAP571

软件版本

- 1.0.2.15(WAP131、WAP351)
- 1.1.0.9(WAP150、WAP 361)
- 1.3.0.6(WAP371)
- 1.0.1.12(WAP571)

配置密码复杂性

步骤1.登录Web配置实用程序，然后选择System Security > Password Complexity。“密码复杂性”页面打开：

Password Complexity

Password Complexity: Enable

Password Minimum Character Class: 3

Password Different From Current: Enable

Maximum Password Length: 64 (Range: 64 - 80, Default: 64)

Minimum Password Length: 8 (Range: 0 - 32, Default: 8)

Password Aging Support: Enable

Password Aging Time: 180 Days (Range: 1 - 365, Default: 180)

Save

步骤2.选中Password Complexity字段中的Enable复选框以启用密码复杂性。如果不想启用密码复杂性，请取消选中该复选框并跳至[步骤7](#)。默认情况下会选中该复选框。

Password Complexity

Password Complexity: Enable

Password Minimum Character Class: 3

Password Different From Current: Enable

Maximum Password Length: 64 (Range: 64 - 80, Default: 64)

Minimum Password Length: 8 (Range: 0 - 32, Default: 8)

Password Aging Support: Enable

Password Aging Time: 180 Days (Range: 1 - 365, Default: 180)

Save

步骤3.在“密码最小字符类”下拉列表中，选择必须在密码字符串中表示的最小字符类数。这些可能的类是大写字母、小写字母、数字和特殊字符。默认值为3。

Password Complexity

Password Complexity: Enable

Password Minimum Character Class: 3

Password Different From Current: Enable

Maximum Password Length: 64 (Range: 64 - 80, Default: 64)

Minimum Password Length: 8 (Range: 0 - 32, Default: 8)

Password Aging Support: Enable

Password Aging Time: 180 Days (Range: 1 - 365, Default: 180)

Save

步骤4.在“密码与当前密码不同”字段中，如果希望用户在密码过期时输入与其当前密码不同的密码，请选中启用复选框。取消选中此复选框可让用户在密码过期时重新使用同一密码。默认是检查。

Password Complexity

Password Complexity: Enable

Password Minimum Character Class: 3

Password Different From Current: Enable

Maximum Password Length: 64 (Range: 64 - 80, Default: 64)


Minimum Password Length: 8 (Range: 0 - 32, Default: 8)

Password Aging Support: Enable

Password Aging Time: 180 Days (Range: 1 - 365, Default: 180)


Save

步骤5.在Maximum Password Length字段中，输入密码可以包含的最大字符数。范围为64 - 80，默认为64。

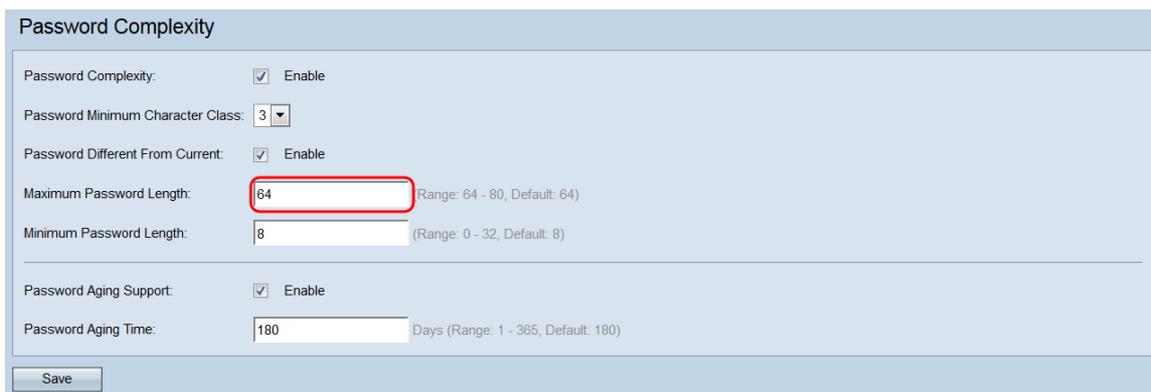


The screenshot shows the 'Password Complexity' configuration window. The 'Maximum Password Length' field is highlighted with a red box and contains the value '64'. Other fields include 'Password Complexity' (checked), 'Password Minimum Character Class' (3), 'Password Different From Current' (checked), 'Minimum Password Length' (8), 'Password Aging Support' (checked), and 'Password Aging Time' (180). A 'Save' button is at the bottom left.

步骤6.在“最小密码长度”字段中，输入密码可以包含的最小字符数。范围为0 - 32，默认为8。

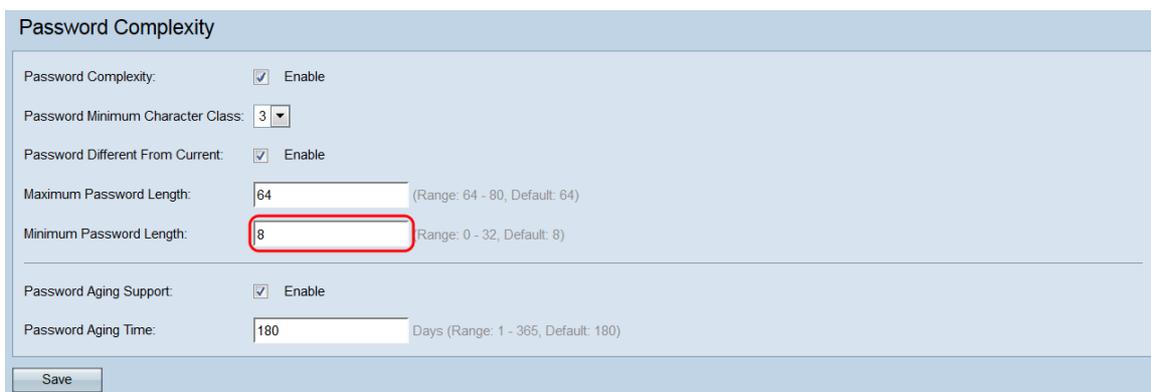


The screenshot shows the 'Password Complexity' configuration window. The 'Minimum Password Length' field is highlighted with a red box and contains the value '8'. Other fields include 'Password Complexity' (checked), 'Password Minimum Character Class' (3), 'Password Different From Current' (checked), 'Maximum Password Length' (64), 'Password Aging Support' (checked), and 'Password Aging Time' (180). A 'Save' button is at the bottom left.

步骤7.在“密码老化支持”字段中，选中启用复选框，使密码在设置的时间段后过期。如果不希望密码过期，请取消选中此复选框并跳至[步骤9](#)。默认情况下会选中该复选框。

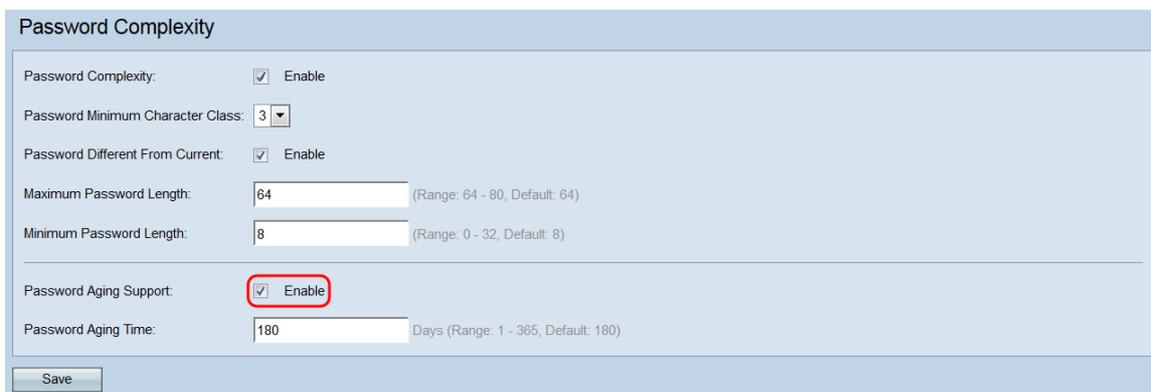

The screenshot shows the 'Password Complexity' configuration window. The 'Password Aging Support' checkbox is checked and highlighted with a red box. Other fields include 'Password Complexity' (checked), 'Password Minimum Character Class' (3), 'Password Different From Current' (checked), 'Maximum Password Length' (64), 'Minimum Password Length' (8), and 'Password Aging Time' (180). A 'Save' button is at the bottom left.

步骤8.在“密码老化时间”字段中，输入新密码到期前的天数。范围为1 - 365，默认为180。

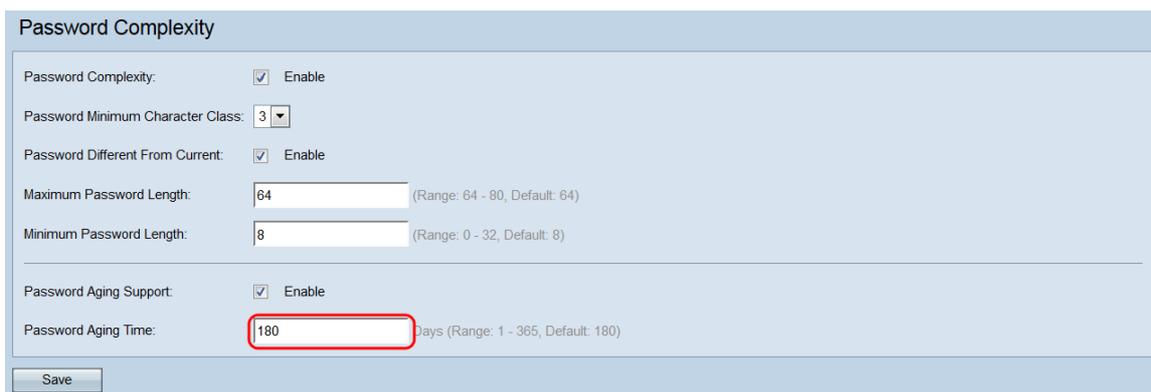

The screenshot shows the 'Password Complexity' configuration window. The 'Password Aging Time' field is highlighted with a red box and contains the value '180'. Other fields include 'Password Complexity' (checked), 'Password Minimum Character Class' (3), 'Password Different From Current' (checked), 'Maximum Password Length' (64), 'Minimum Password Length' (8), and 'Password Aging Support' (checked). A 'Save' button is at the bottom left.

步骤9. 单击“保存”以保存更改。您将从Web配置实用程序注销，并且必须重新输入新登录信息才能重新获得访问权。

Password Complexity

Password Complexity: Enable

Password Minimum Character Class:

Password Different From Current: Enable

Maximum Password Length: (Range: 64 - 80, Default: 64)

Minimum Password Length: (Range: 0 - 32, Default: 8)

Password Aging Support: Enable

Password Aging Time: Days (Range: 1 - 365, Default: 180)

Save