


在WAP125或WAP581上配置访客Web门户区域 设置表

目标

WAP125和WAP581接入点的访客Web门户区域设置允许您操作强制网络门户的设置。这是强制网络门户窗口的外观配置位置。访客Web门户的配置通常在首次部署访客访问时完成。访客Web门户表为网络管理员提供了自定义访客Web门户的能力，以便更好地满足公司的要求。

本文旨在展示如何在WAP125或WAP581接入点上配置访客Web门户区域设置。

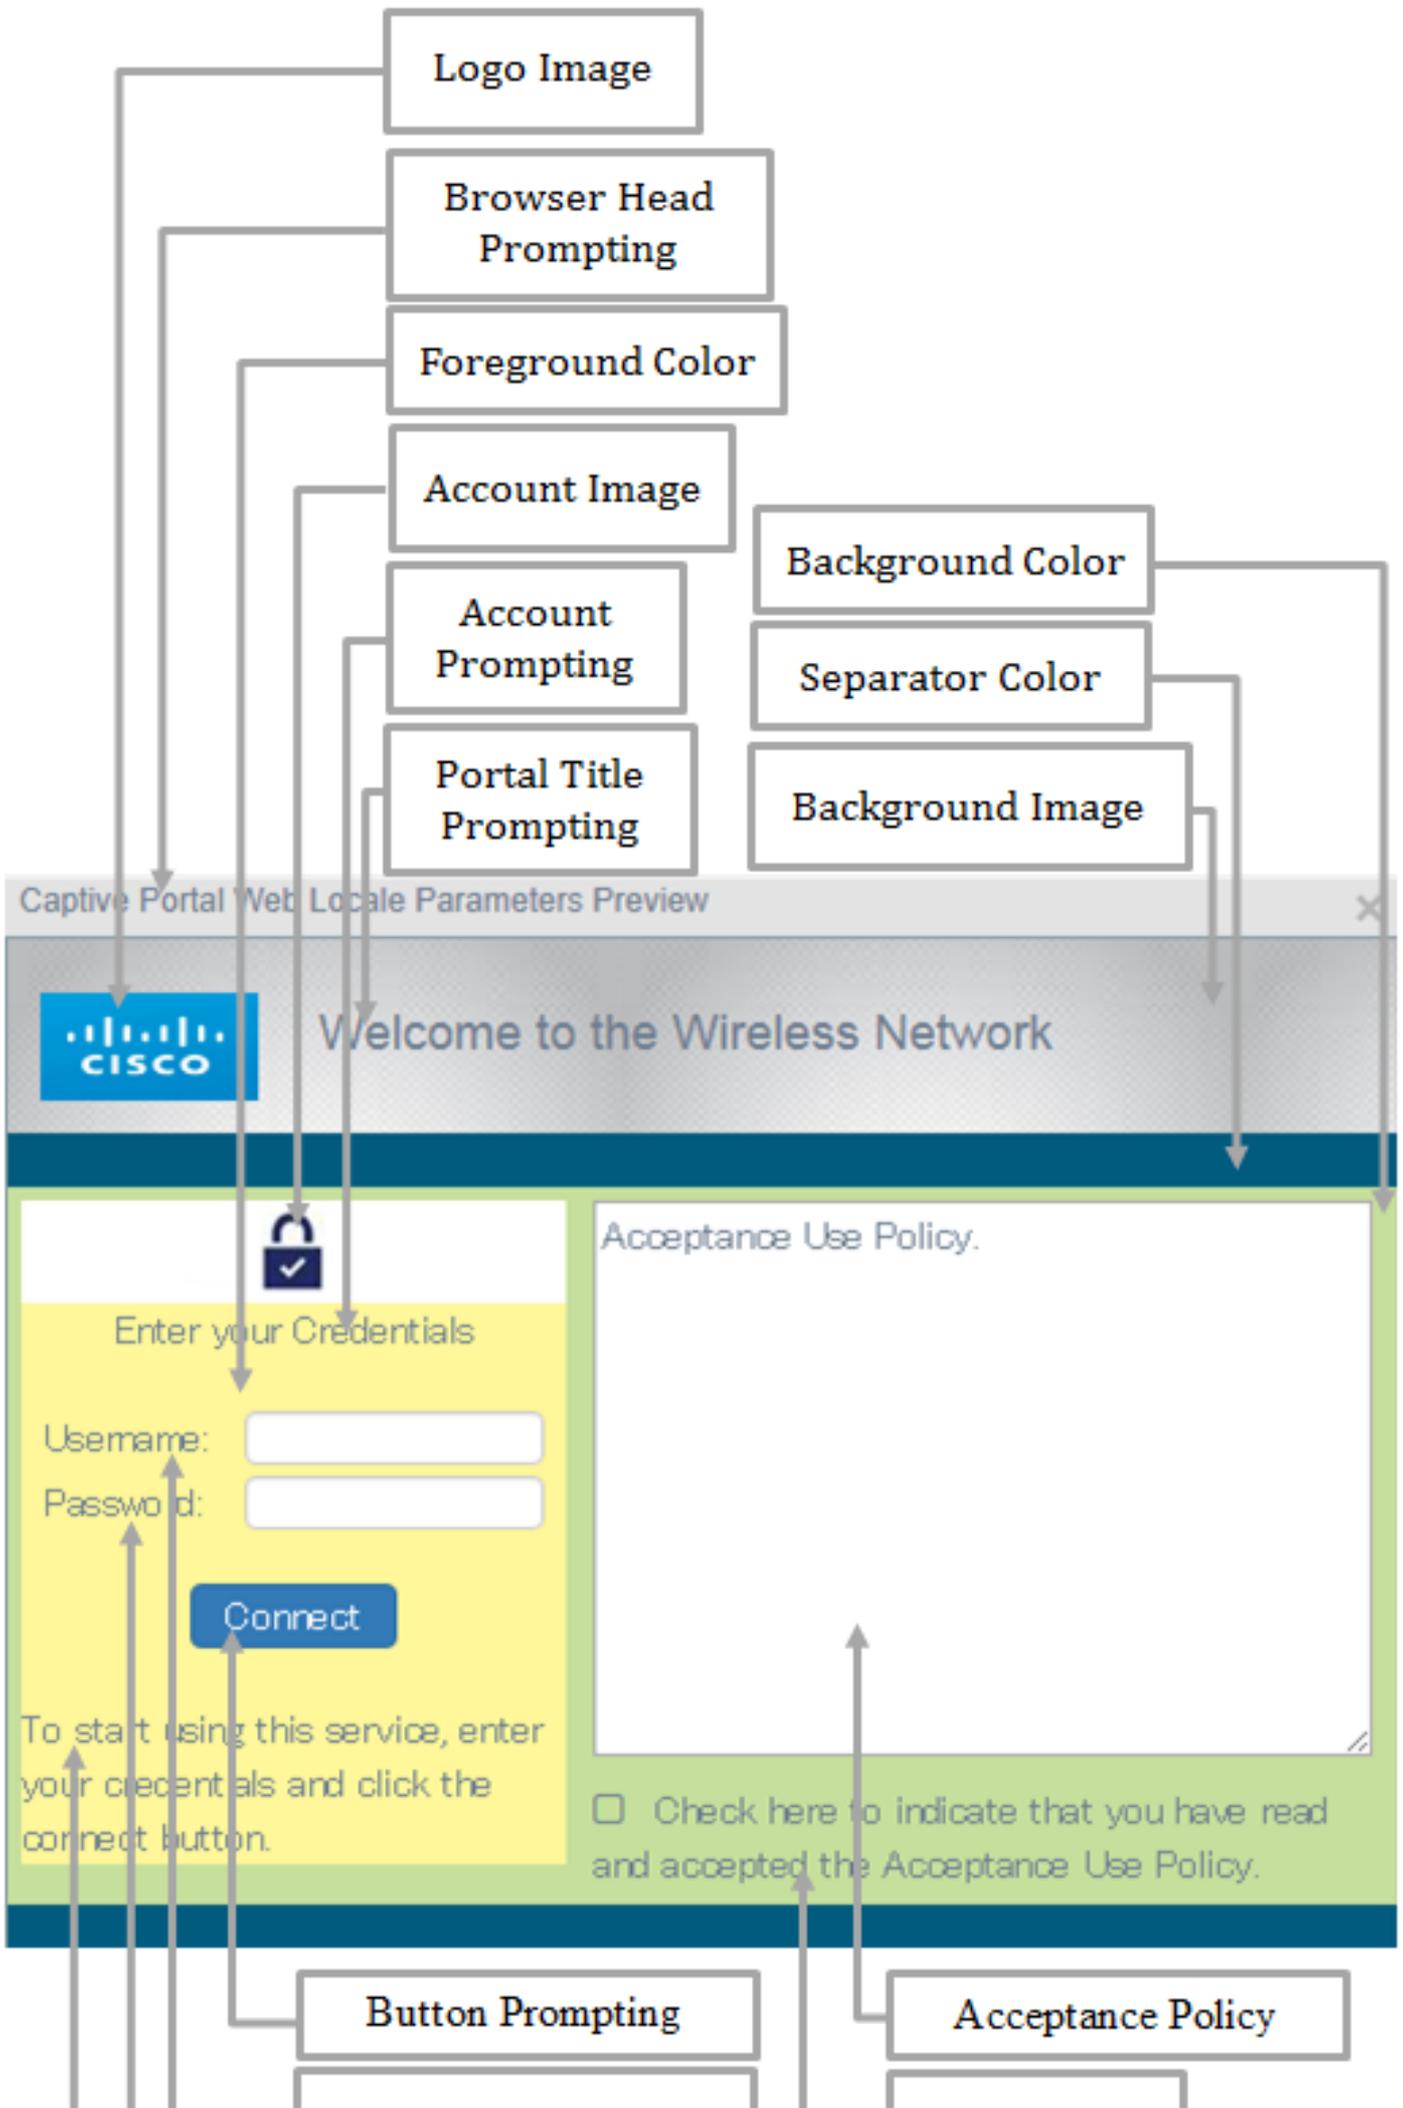

适用设备 | 固件版本

- WAP125 | 1.0.0.5(下载[最新版本](#))
- WAP581 | 1.0.0.4(下载[最新版本](#))

配置访客Web门户区域设置

步骤1:在提供的字段中输入您的用户名和密码，然后点击登录，登录到基于Web的实用程序。



Wireless Access Point

cisco

.....

English ▼

Login

©2017 Cisco Systems, Inc. All Rights Reserved.

Cisco, the Cisco Logo, and Cisco Systems are registered trademarks or trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

注意：默认用户名和密码为cisco/cisco。

第二步：选择Access Control > Guest Access。

注：本文中的图像来自WAP125。菜单选项可能会因设备型号而异。



Getting Started



System Configuration



Wireless



Wireless Bridge



Fast Roaming



Access Control

ACL

Client QoS

Guest Access

第三步：选中要配置的Web门户区域设置名称的复选框。



Web Portal Locale Name



Default

注意：在本示例中，选择Default。

第四步：单击 Edit 按钮。

Web Portal Locale Table



Web Portal Locale Name



Default

第五步：在Web Portal Locale Name字段中输入门户的名称。最长可为32个字符。

Web Portal Customization

Preview

Web Portal Locale Name: [?](#)

SampleGuestLocale

Guest Access Instance Name:


wiz_cp_inst1

Background Image:

cisco_bkg.jpg


注意：在本示例中，输入SampleGuestLocale。

选择背景图像

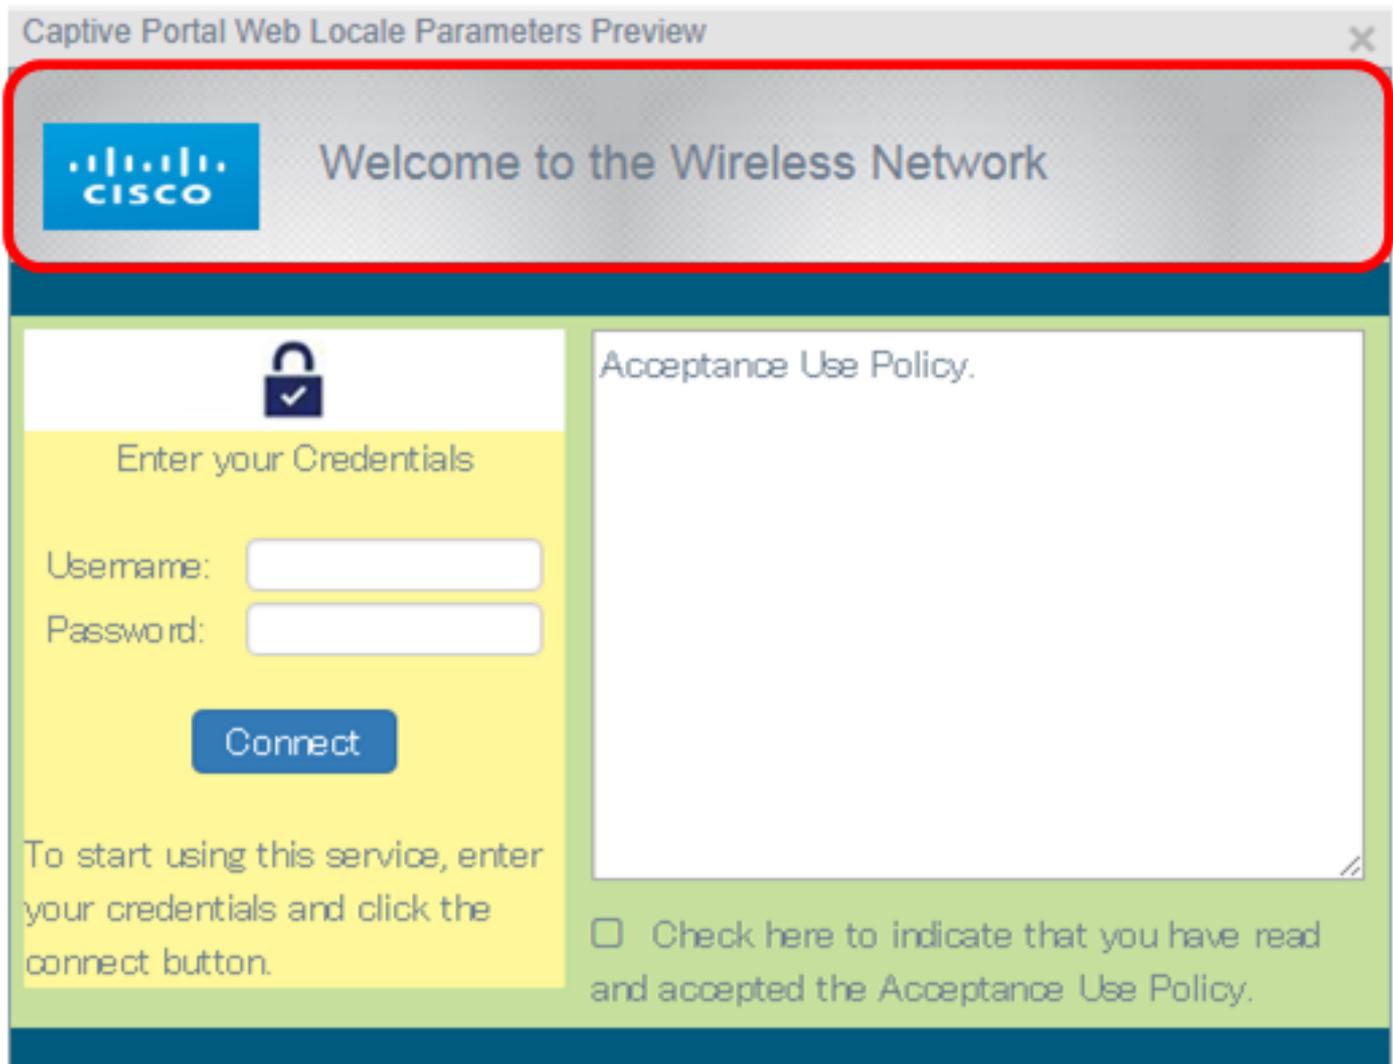


注意：背景图像显示在徽标图像的背面，并且门户标题提示符。背景图像大小必须为64k或更小，并且文件名必须不包含空格，最长为32个字符。支持的图像文件类型为GIF、JPG和PNG。在本示例中，选择了background_image3.png。

第六步：在“Web门户定制”(Web Portal Customization)页面上，点击背景图像浏览(Background Image Browse)按钮。

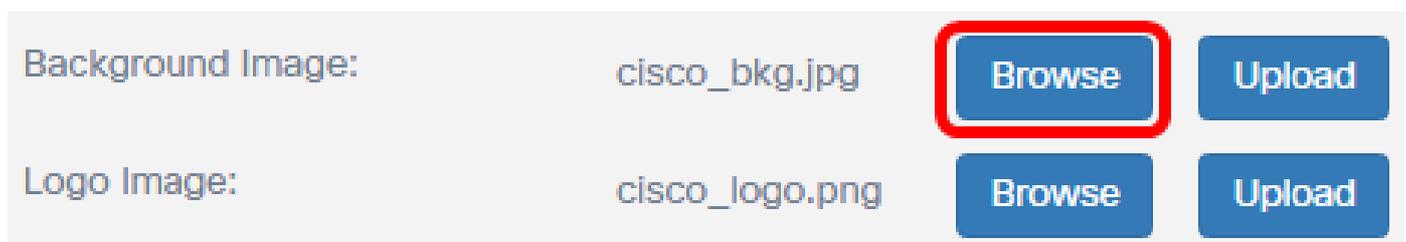

步骤 7. 点击需要用作门户背景的图片。

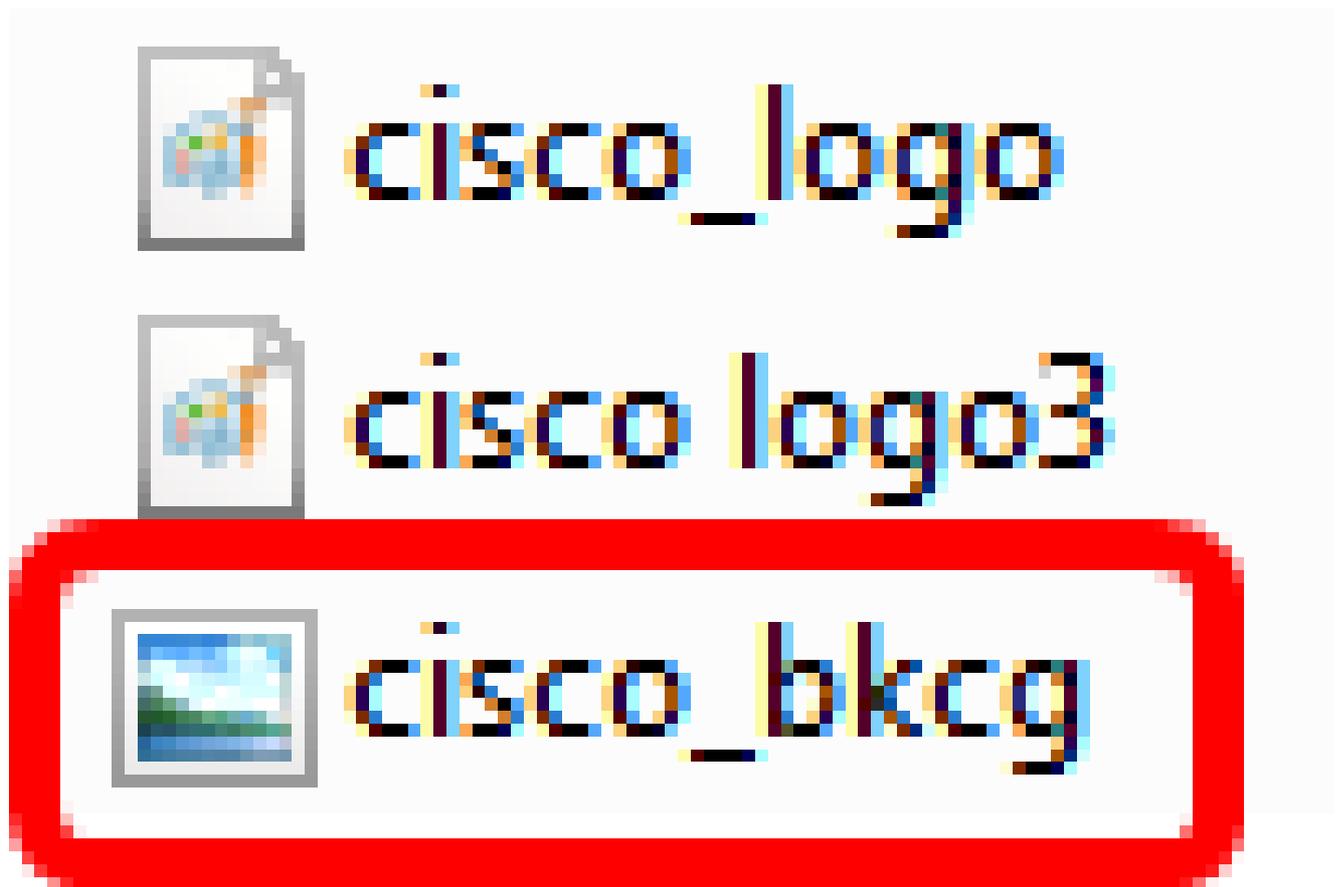


步骤 8单击 Open (打开)。



步骤 9单击Upload。

Background Image:	cisco_bkg.jpg	Browse	Upload
Logo Image:	cisco_logo.png	Browse	Upload

选择徽标图像

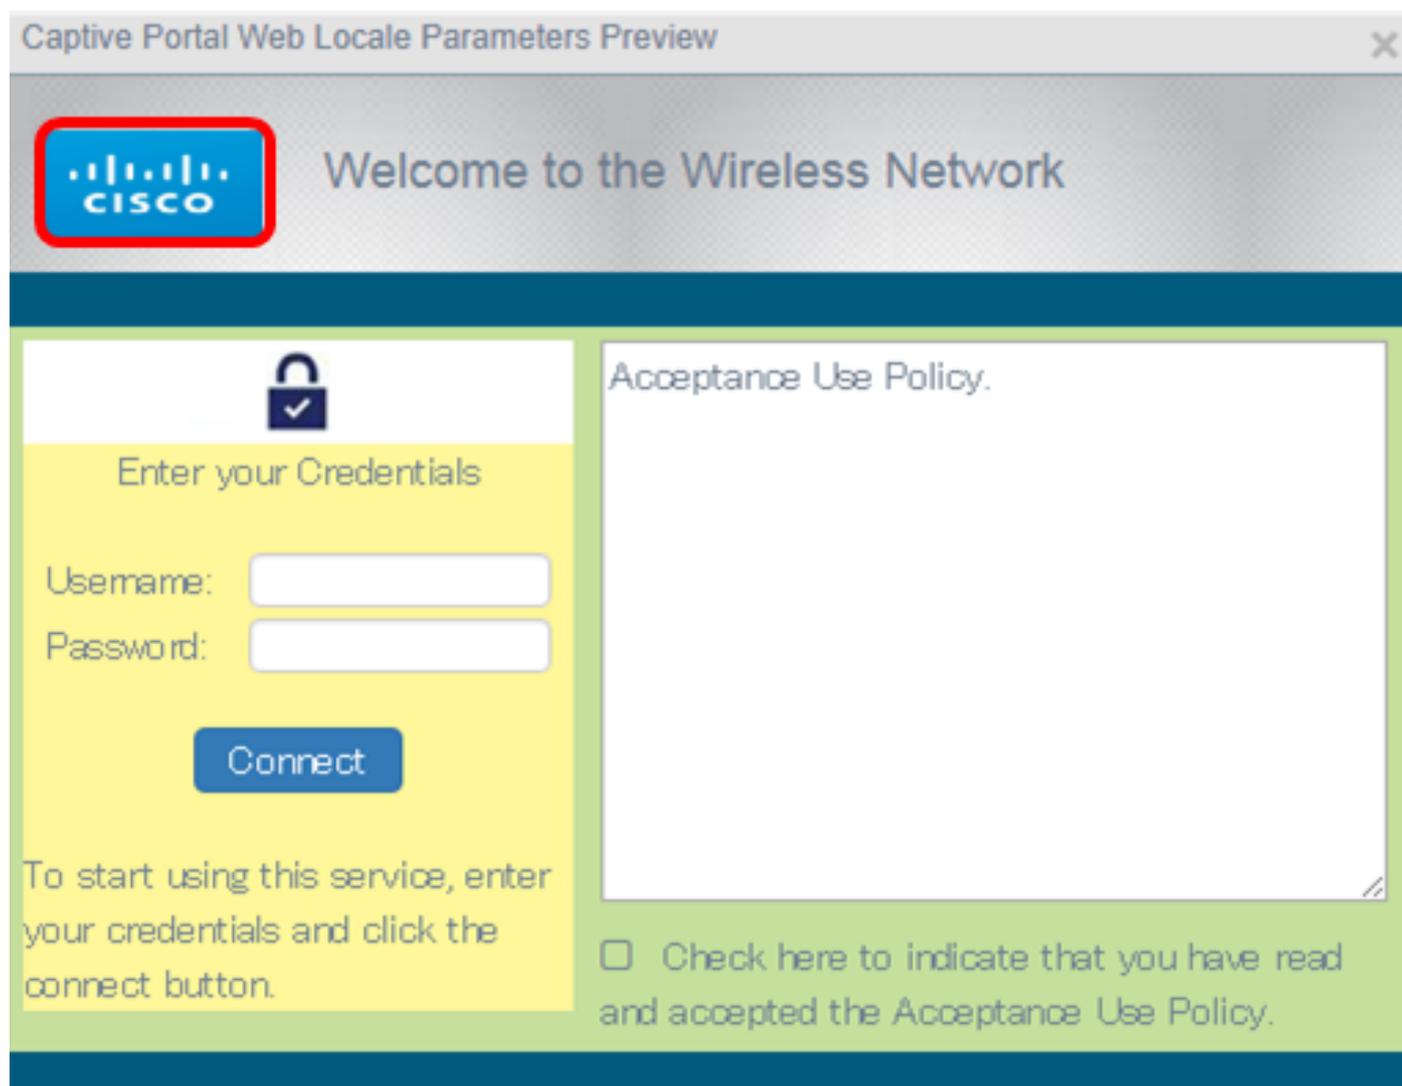


注意：徽标图像显示在门户提示符的左上角。徽标图像大小必须为64k或更小，并且文件名必须不包含空格，最长为32个字符。在本示例中，选择cisco_logo.png。

步骤 10 点击 Logo Image Browse 按钮。

Background Image:	cisco_bkg.jpg	Browse	Upload
Logo Image:	cisco_logo.png	Browse	Upload

步骤 11 点击需要用作门户徽标的图像。

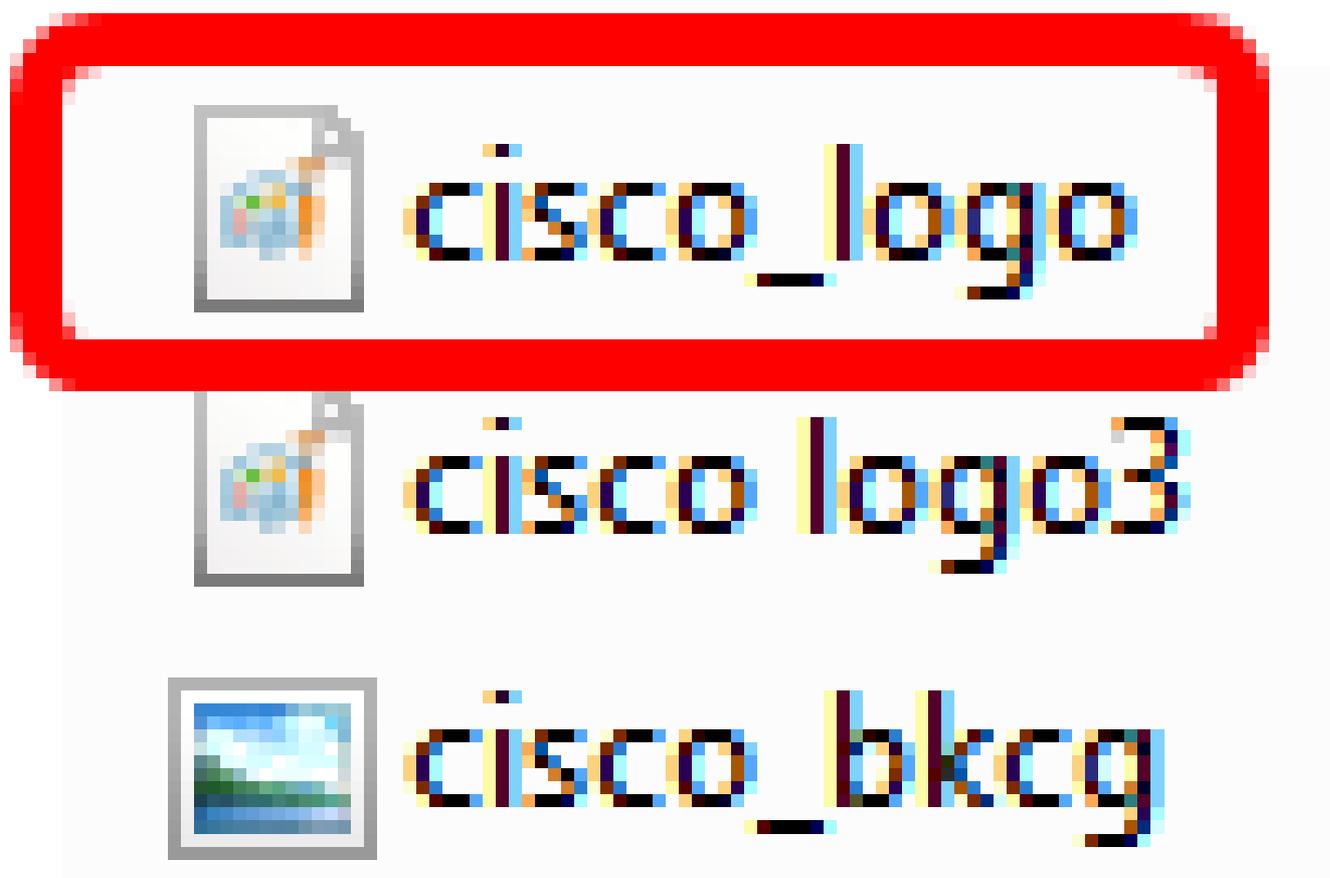


注意：在本示例中，选择cisco_logo。


步骤 12 单击 Open (打开)。



步骤 13单击Upload。

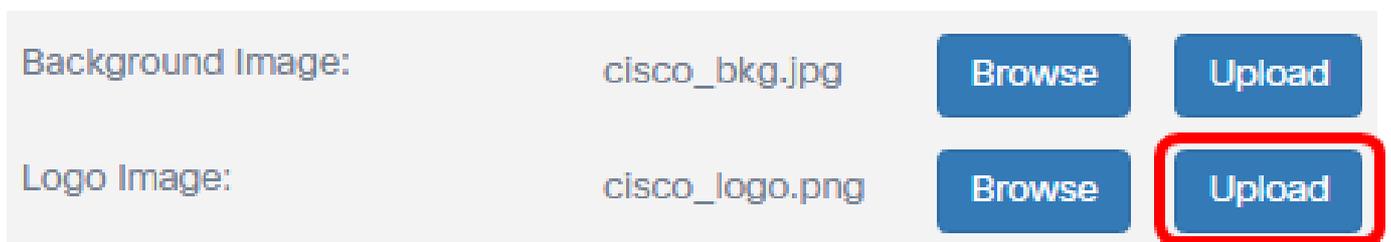

选择前景色

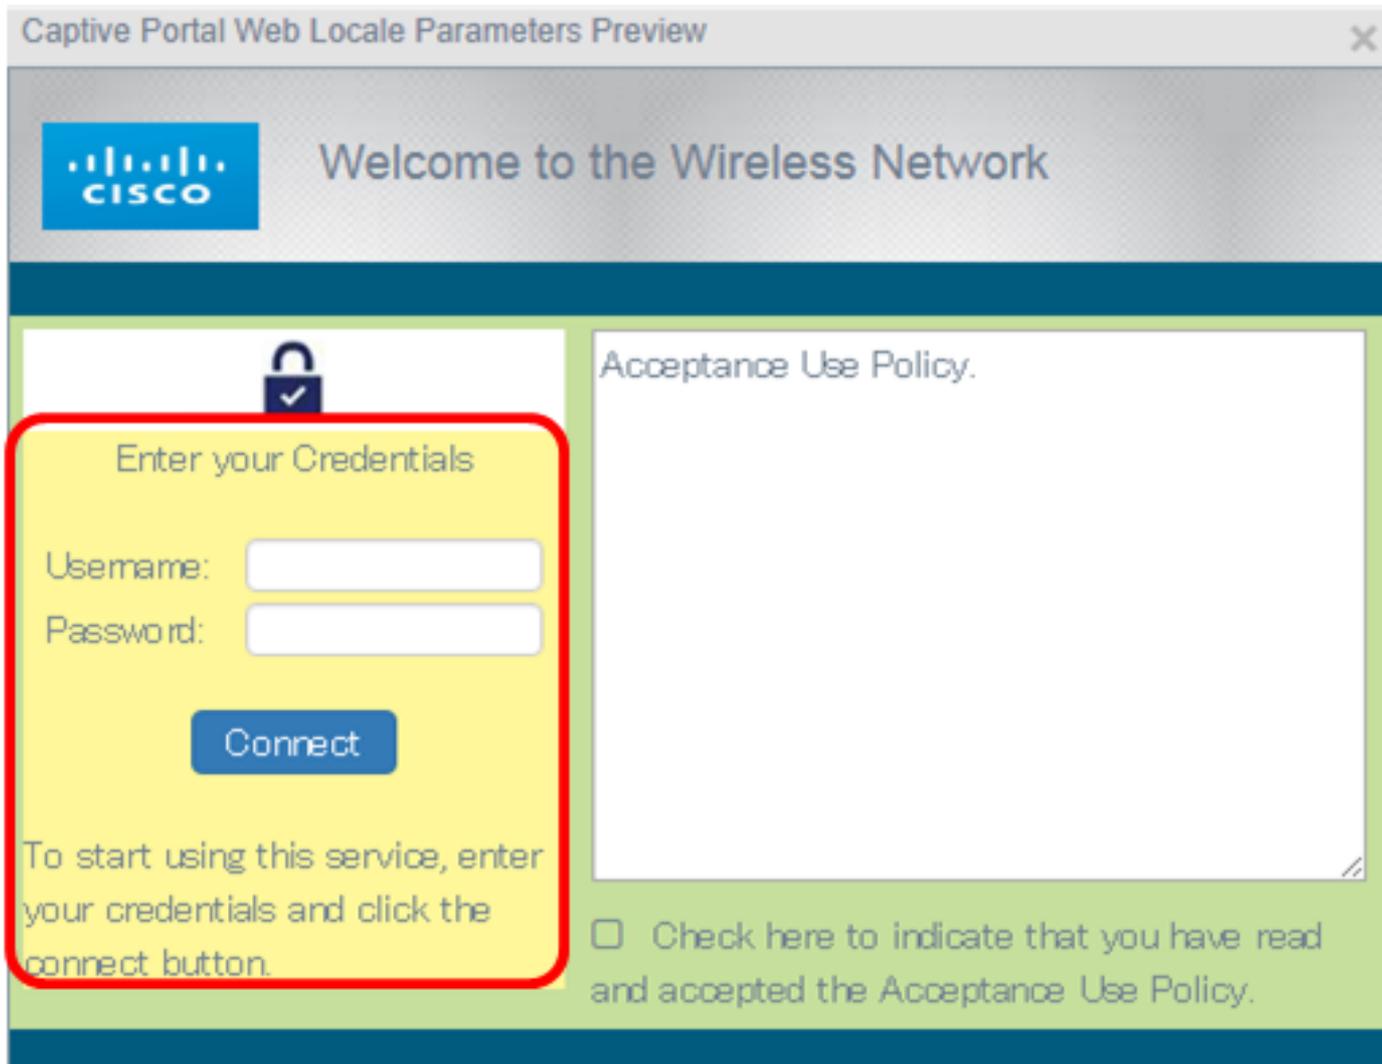


注意：前景色是Connect按钮、帐户提示提示、用户名和密码提示的背景色。默认值为#FFFFFF。在本示例中，前景颜色为#fff799。

步骤 14在“Web门户自定义”页面上，点击前景颜色选择按钮。




步骤 15选择门户前景所需的颜色。

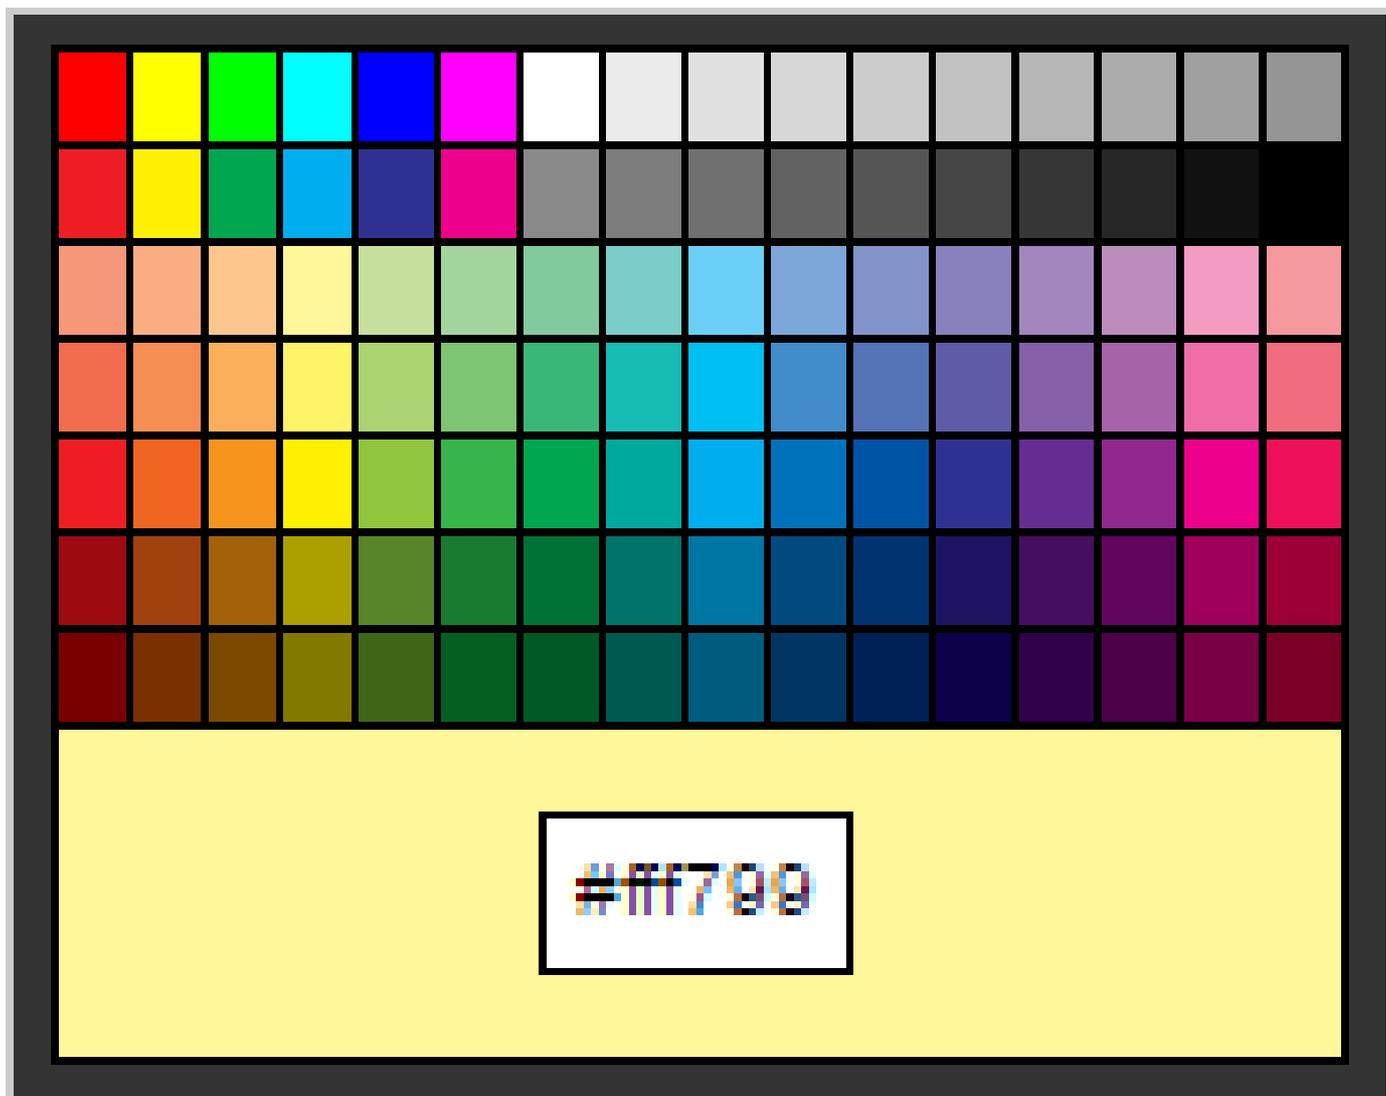

注意：在本例中，#ff799被选中。

选择背景颜色

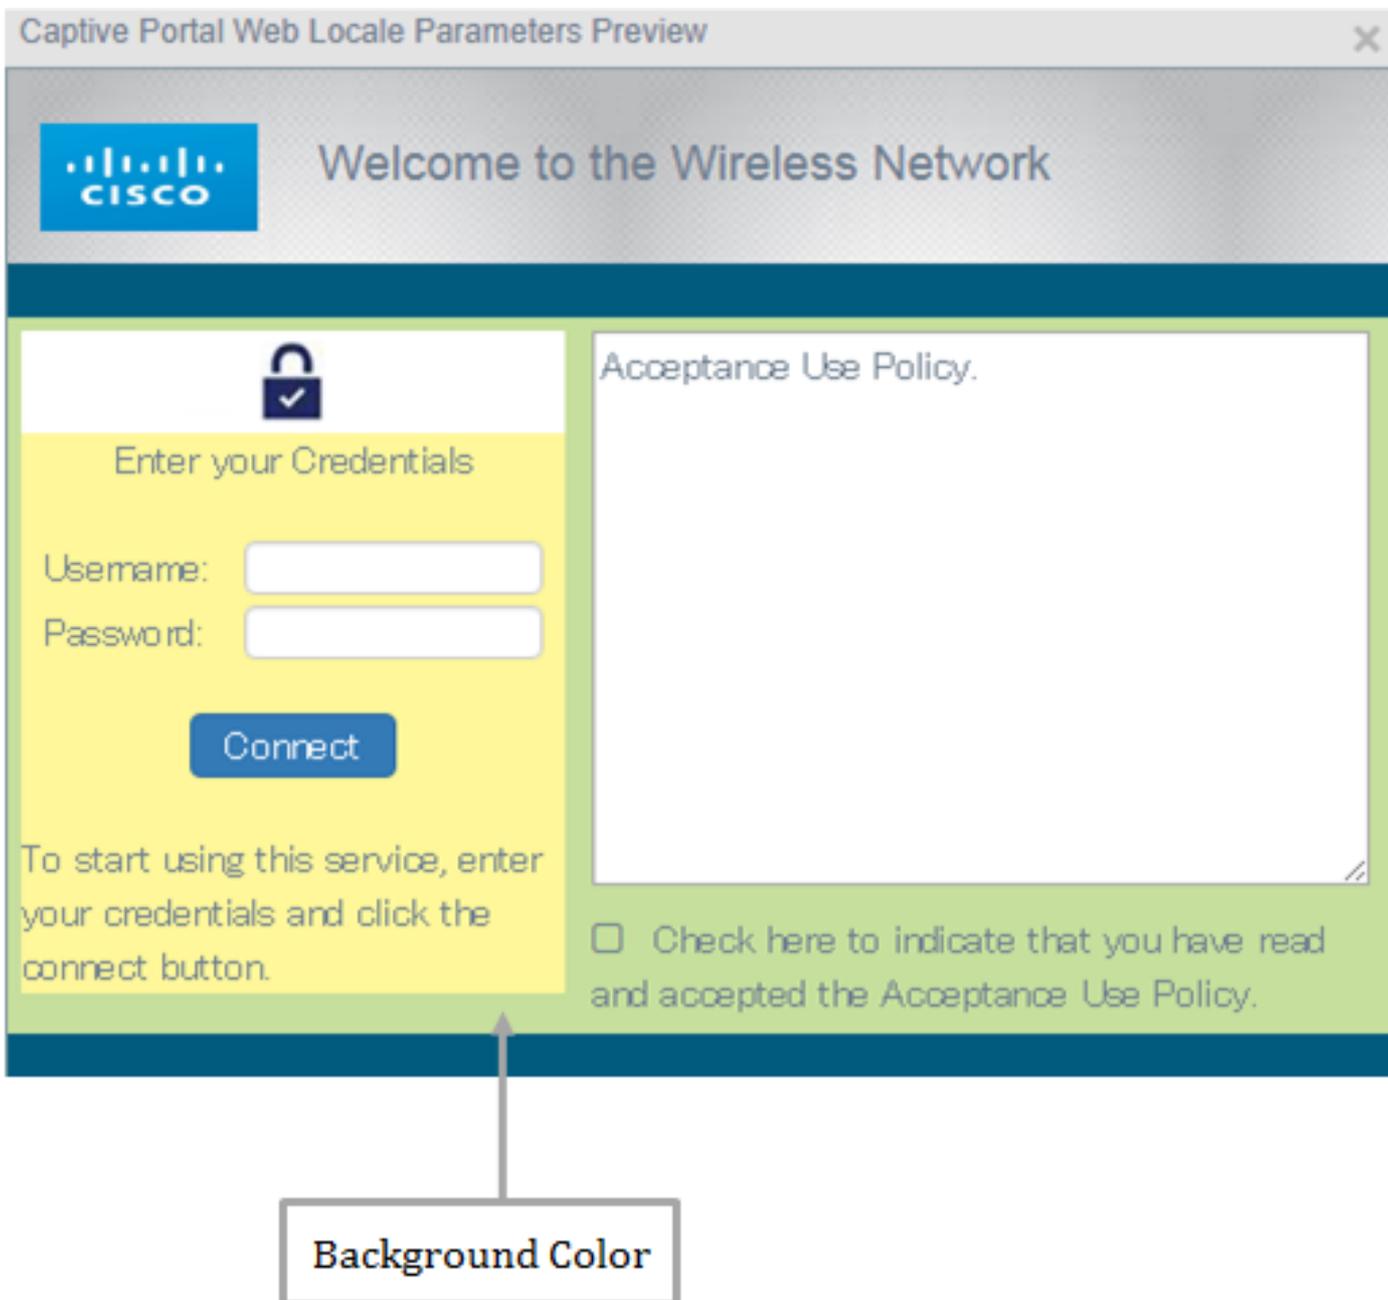


注意：背景颜色是紧邻接受策略的颜色和前景的颜色。此处显示“接受提示”消息。

步骤 16在“Web门户自定义”页面中，点击背景颜色选择(Background Color Select)按钮。




步骤 17选择您用于门户背景的颜色。

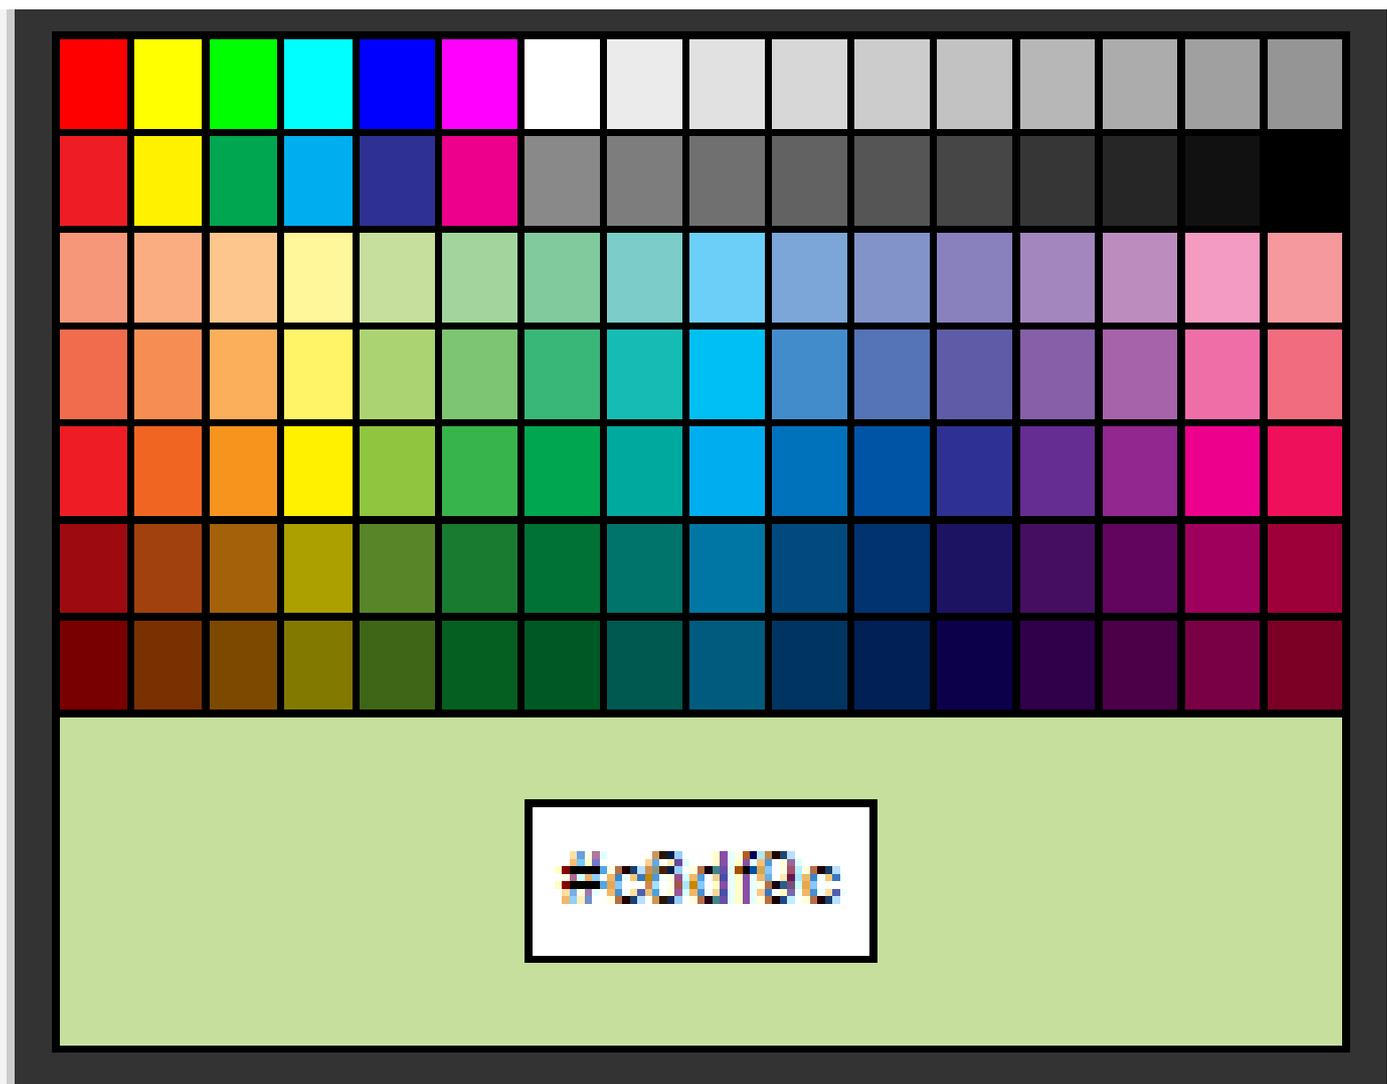


注：默认值为#FFFFFF。在本例中，#c6df9c被选中。

选择分隔符颜色

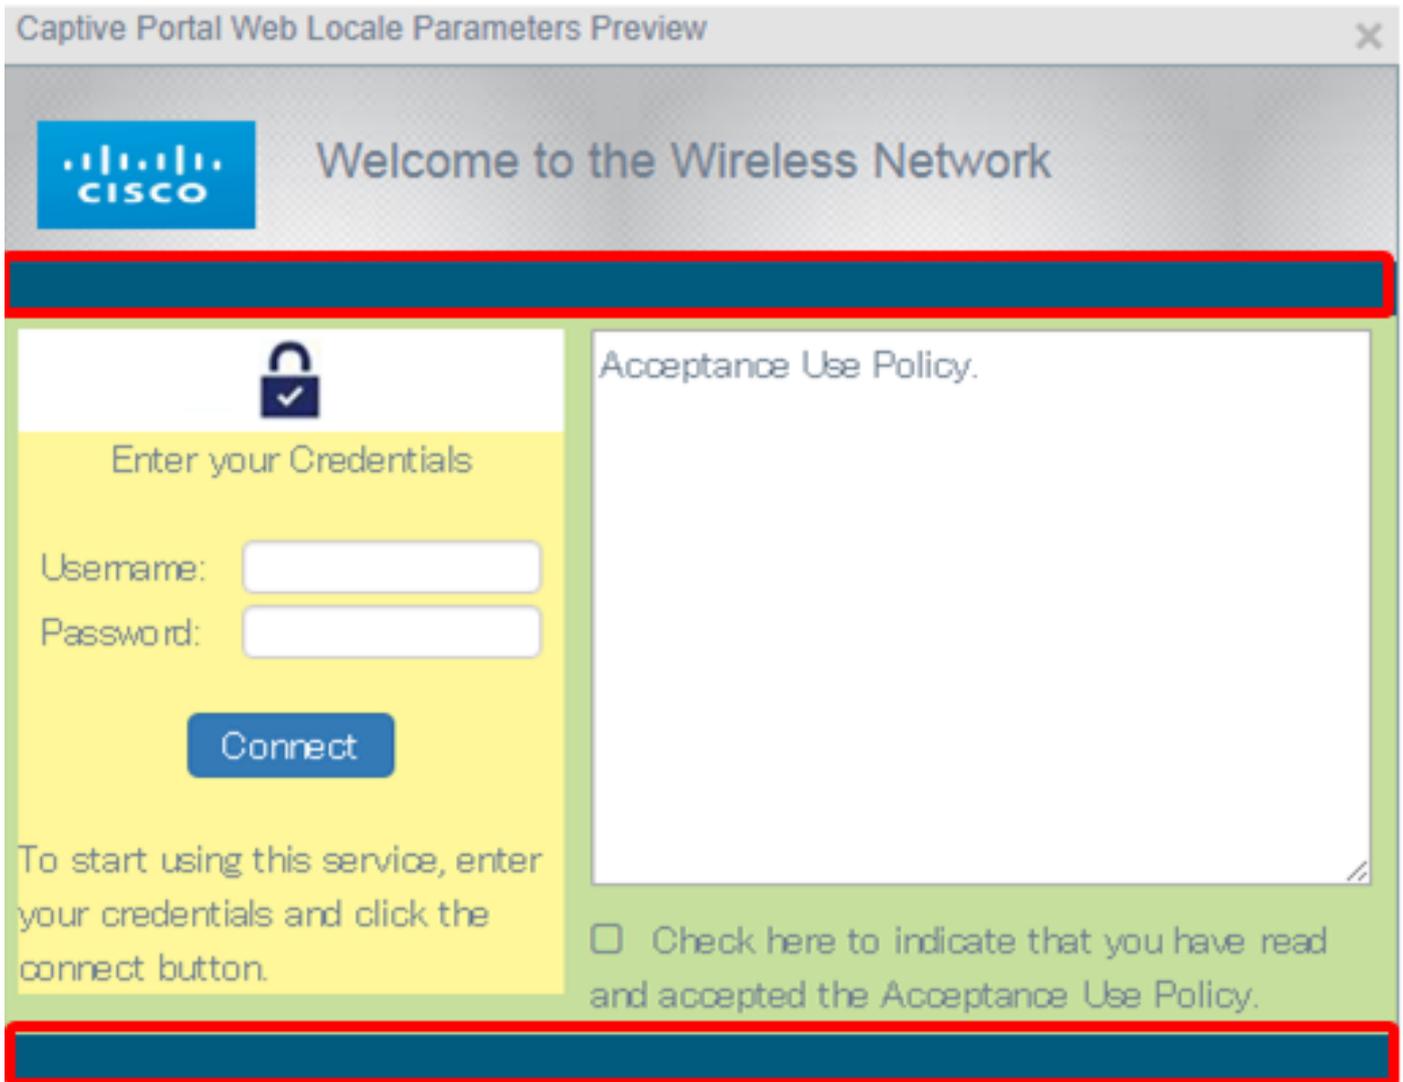


注意：分隔符颜色位于Portal Title Prompting区域正下方。分隔符颜色下方是接受策略和帐户图像。

步骤 18.在“Web门户定制”页面上，点击分隔符颜色选择按钮。

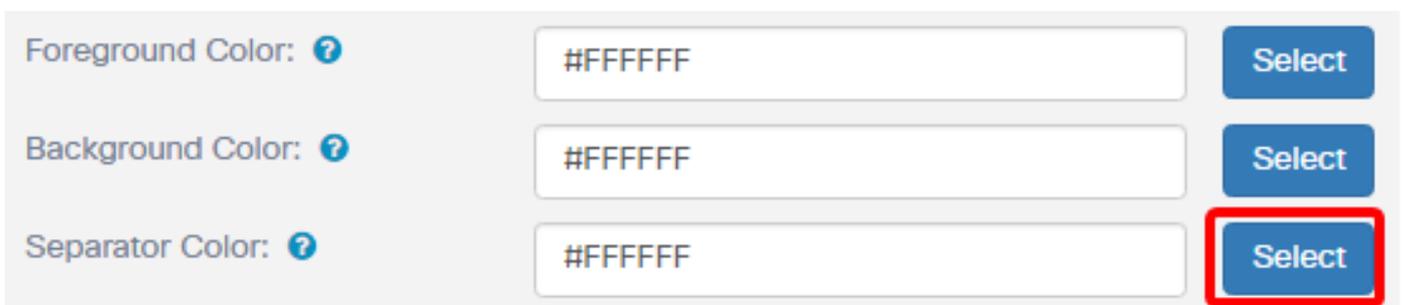


步骤 19.选择需要使用门户的分隔符颜色的颜色。

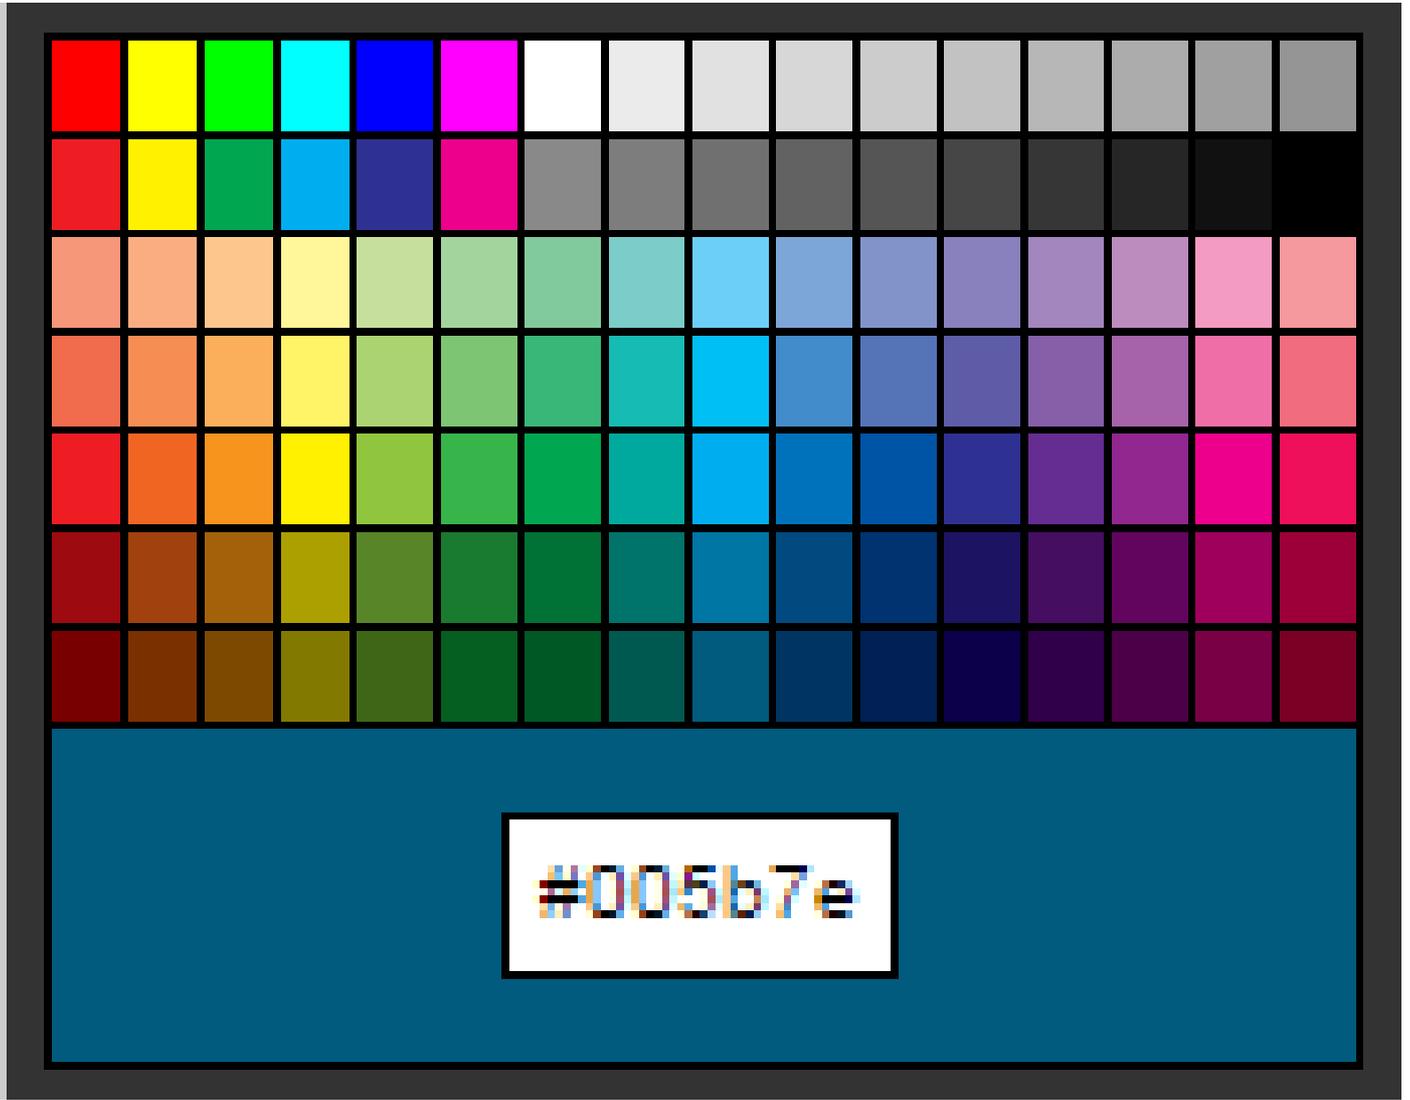


注：默认值为#FFFFFF。在本例中，#005b7e被选中。

选择帐户的图像

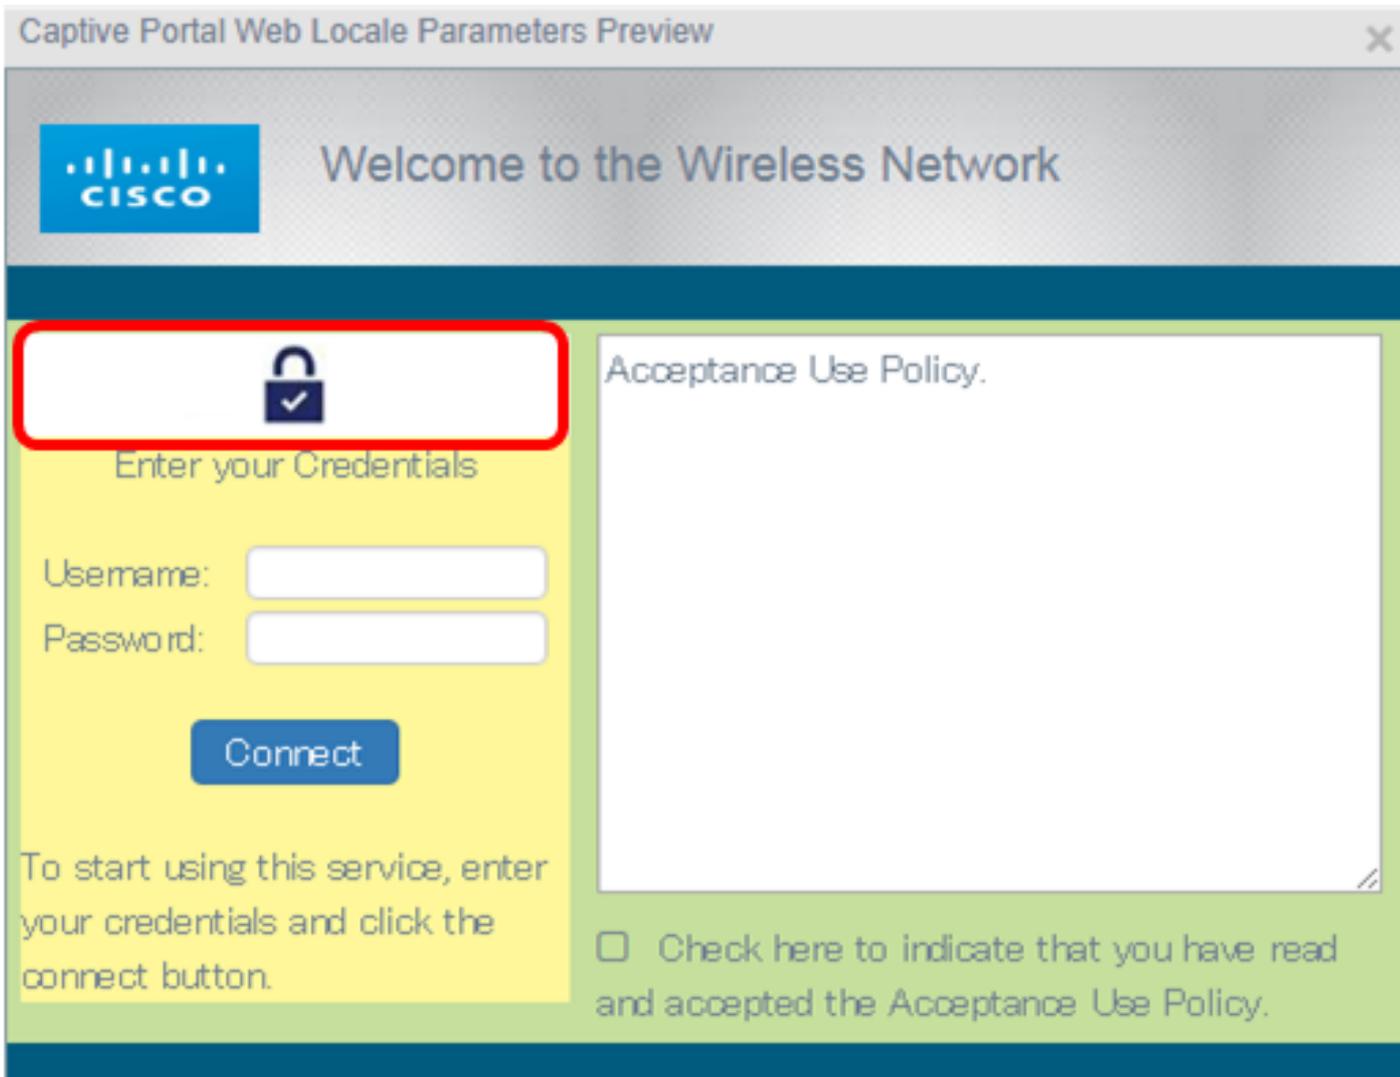


注意：帐户图像的大小必须为5k，并且必须具有文件名且不能包含最多32个字符的空格。支持的图像文件类型为GIF、JPG和PNG。

步骤 20.在Web门户自定义页面上，点击Account Image Browse按钮。

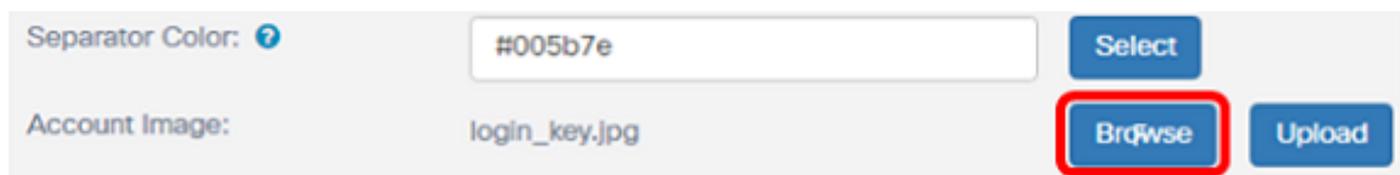

步骤 21.点击需要用作帐户映像的映像。

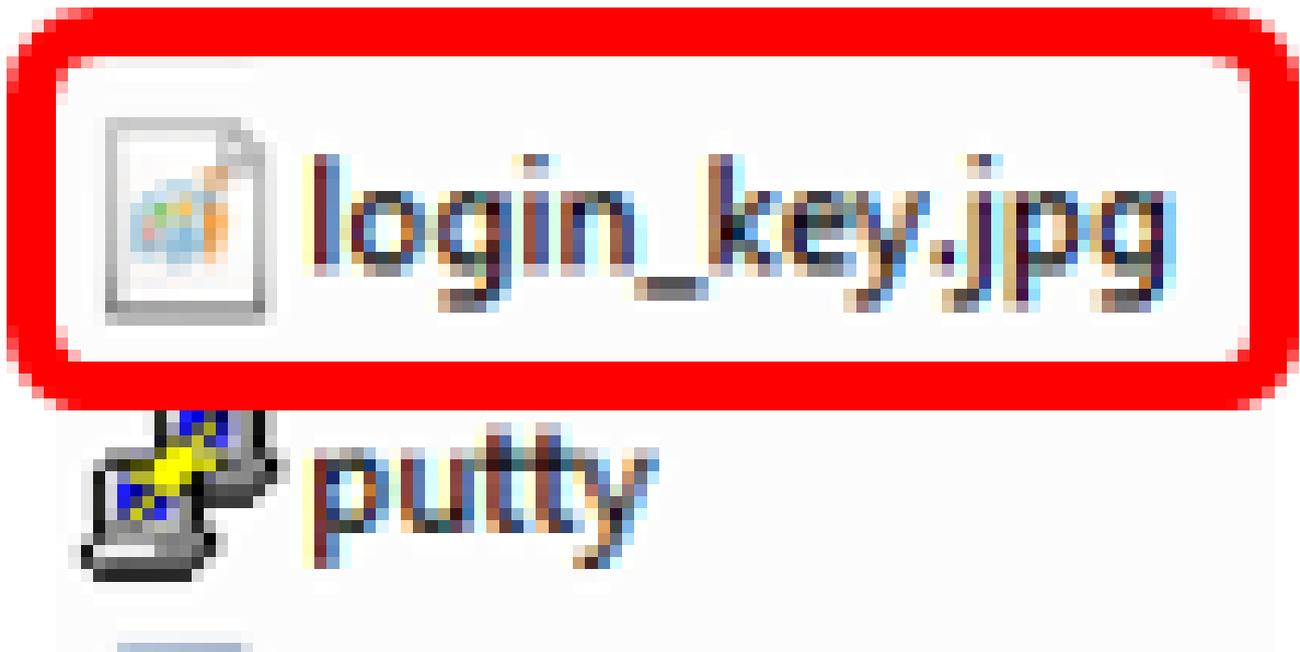


注意：在本示例中，选择了login_key.jpg。


步骤 22.单击 Open (打开)。



步骤 23.单击Upload。

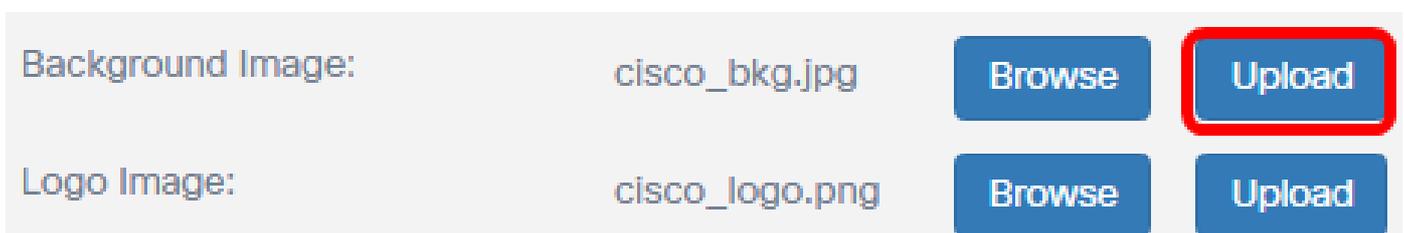

步骤 24从“字体”下拉列表中选择门户的字体。

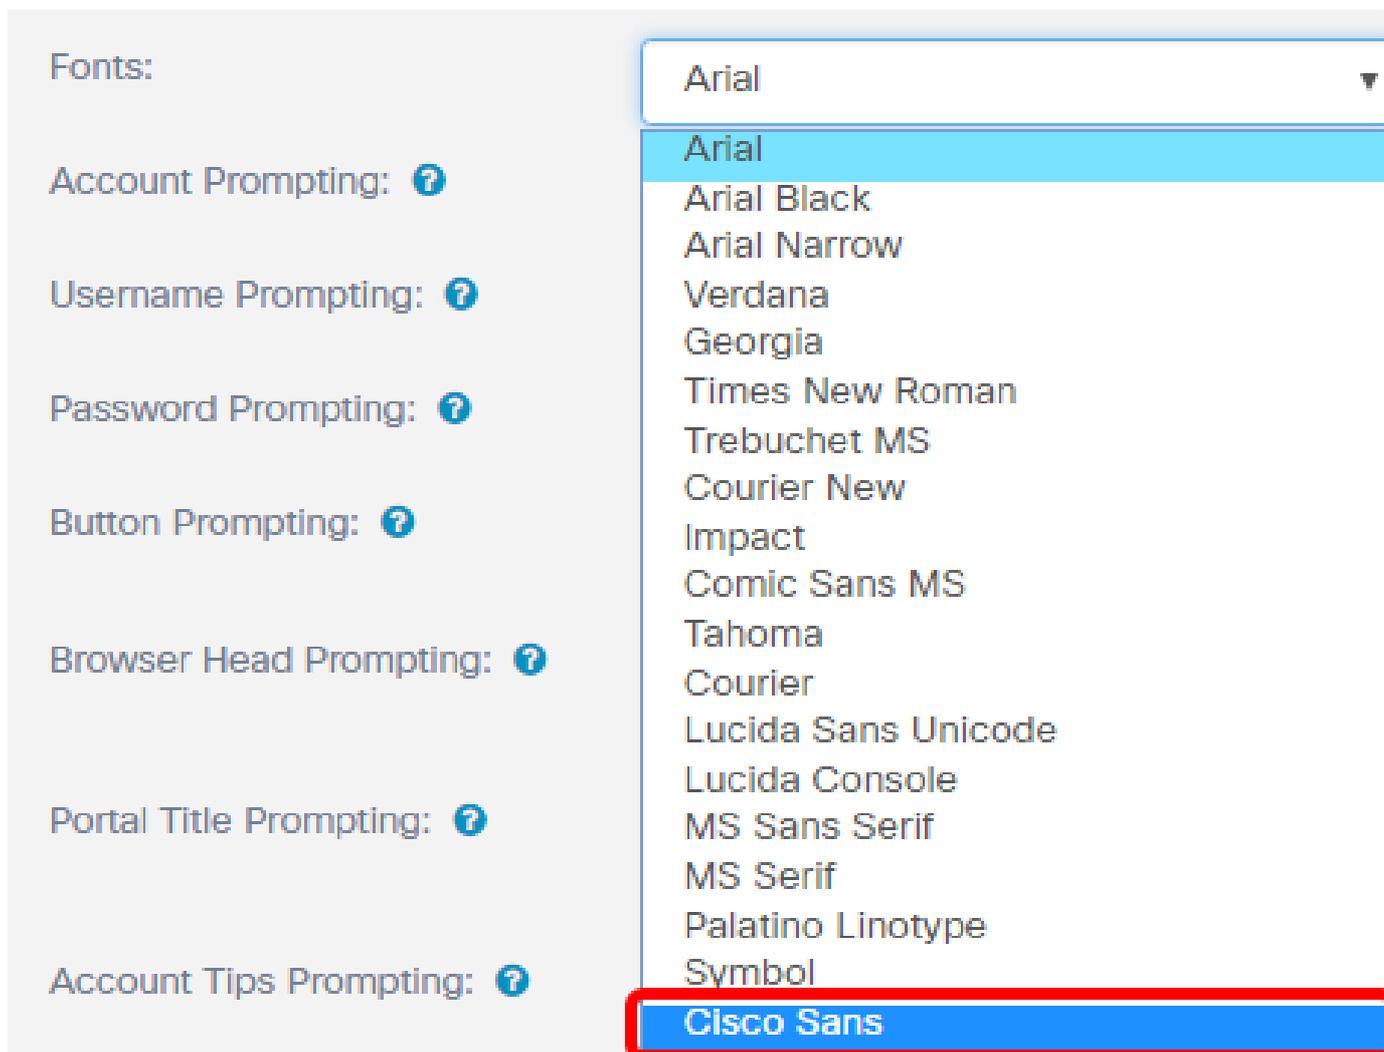


The image shows a configuration interface with a 'Fonts:' section on the left and a dropdown menu on the right. The dropdown menu is open, displaying a list of fonts. The 'Cisco Sans' font is highlighted with a red box, indicating it is the selected option. The other fonts listed include Arial, Arial Black, Arial Narrow, Verdana, Georgia, Times New Roman, Trebuchet MS, Courier New, Impact, Comic Sans MS, Tahoma, Courier, Lucida Sans Unicode, Lucida Console, MS Sans Serif, MS Serif, and Palatino Linotype.

Font Name
Arial
Arial Black
Arial Narrow
Verdana
Georgia
Times New Roman
Trebuchet MS
Courier New
Impact
Comic Sans MS
Tahoma
Courier
Lucida Sans Unicode
Lucida Console
MS Sans Serif
MS Serif
Palatino Linotype
Symbol
Cisco Sans

注：默认值为Arial。在本例中，选择Cisco San。

步骤 25在帐户提示字段中输入开始使用该帐户的提示。

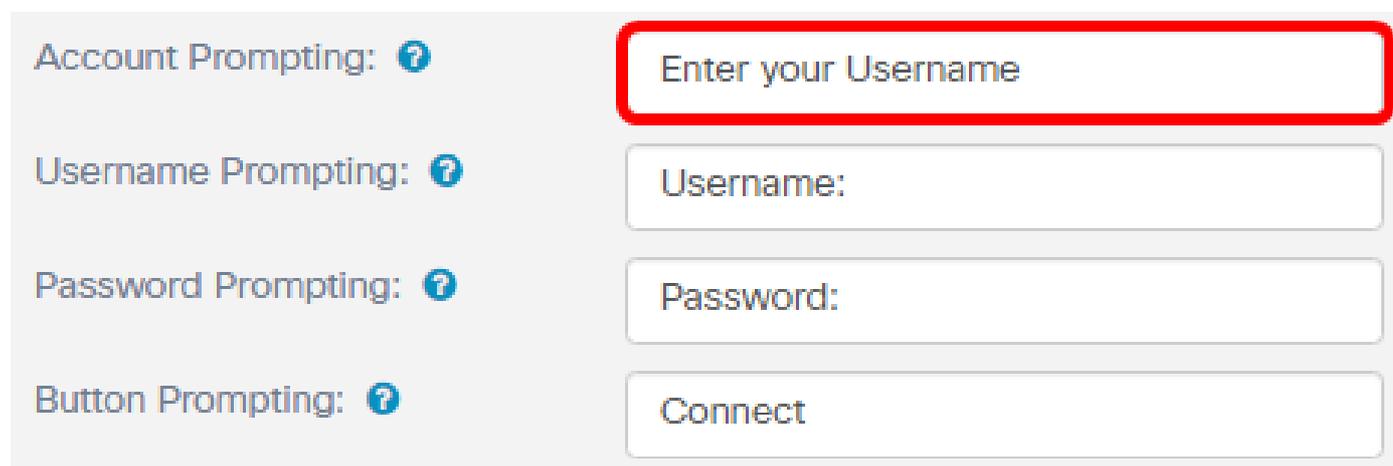

The image shows a configuration interface with four fields on the left and their corresponding input boxes on the right. The 'Account Prompting' field is highlighted with a red box, and its input box contains the text 'Enter your Username'. The other fields are 'Username Prompting' (input: 'Username:'), 'Password Prompting' (input: 'Password:'), and 'Button Prompting' (input: 'Connect').

Field Name	Input Text
Account Prompting	Enter your Username
Username Prompting	Username:
Password Prompting	Password:
Button Prompting	Connect

注意：在本示例中，输入您的用户名。

步骤 26在用户名提示字段中输入用户名提示。

Account Prompting: ?	Enter your Username
Username Prompting: ?	Username:
Password Prompting: ?	Password:
Button Prompting: ?	Connect

注意：在本示例中，输入用户名：。

步骤 27在Password Prompting字段中输入密码的提示。

Fonts:	Arial ▼
Account Prompting: ?	Enter your Username
Username Prompting: ?	Username:
Password Prompting: ?	Password:
Button Prompting: ?	Connect

注意：在本示例中，输入密码：。

步骤 28在Button Prompting字段中输入连接按钮的标签。

Fonts:	<input type="text" value="Arial"/>
Account Prompting: ?	<input type="text" value="Enter your Username"/>
Username Prompting: ?	<input "="" type="text" value="Username:"/>
Password Prompting: ?	<input "="" type="text" value="Password:"/>
Button Prompting: ?	<input type="text" value="Connect"/>

注意：在本示例中，输入Connect。

步骤 29在Browser Head Prompting字段中输入门户的标题名称。

Browser Head Prompting: ?	<input type="text" value="Cisco Captive Portal"/>
Portal Title Prompting: ?	<input type="text" value="Welcome to the Wireless Network"/>
Account Tips Prompting: ?	<input type="text" value="To start using this service, enter your credentials and click the Connect button."/>


注意：在本示例中，输入了Cisco Captive Portal。

步骤 30在门户标题提示字段中输入门户的标题。

Browser Head Prompting: ?	<input type="text" value="Cisco Captive Portal"/>
Portal Title Prompting: ?	<input type="text" value="Welcome to the Wireless Network"/>
Account Tips Prompting: ?	<input type="text" value="To start using this service, enter your credentials and click the Connect button."/>

注意：在本示例中，输入了“欢迎使用无线网络”。


步骤 31在Account Tips Prompting字段中输入开始使用门户的提示。

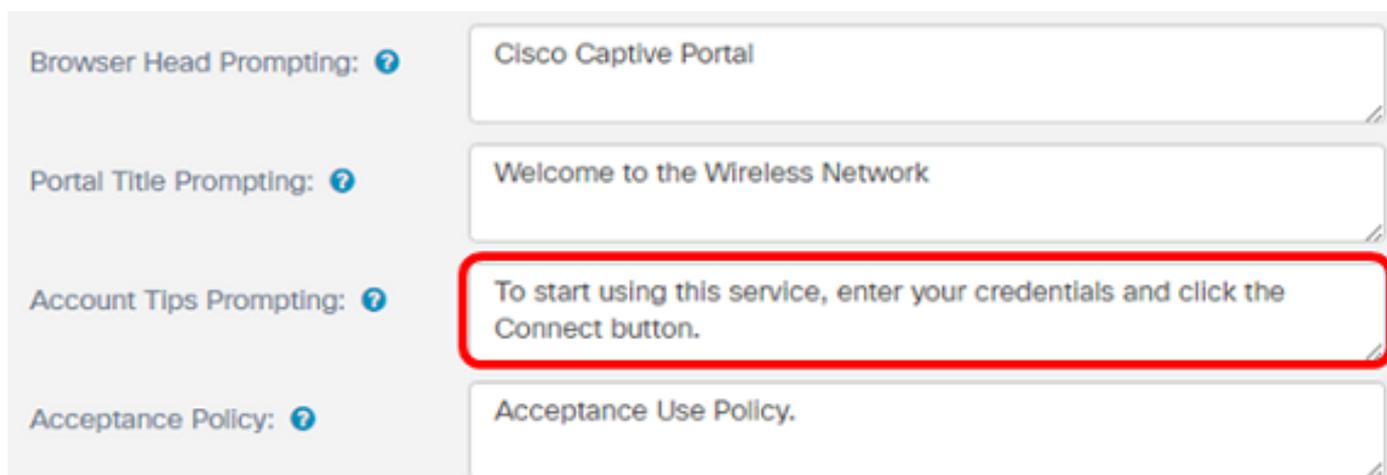

The screenshot shows a configuration interface with four fields. The first field is 'Browser Head Prompting' with the value 'Cisco Captive Portal'. The second field is 'Portal Title Prompting' with the value 'Welcome to the Wireless Network'. The third field is 'Account Tips Prompting' with the value 'To start using this service, enter your credentials and click the Connect button.', which is highlighted with a red box. The fourth field is 'Acceptance Policy' with the value 'Acceptance Use Policy.'

注意：在本示例中，要开始使用此服务，请输入您的凭证，然后点击已输入的“连接”按钮。

步骤 32在Acceptance Policy (接受策略) 字段中输入使用的条款和条件。

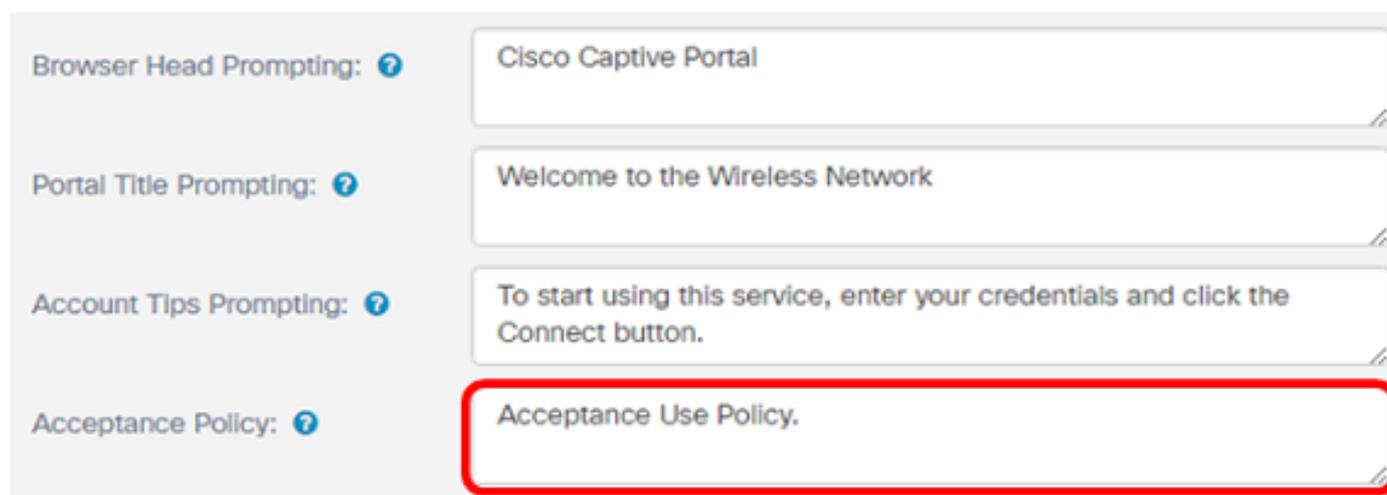

The screenshot shows the same configuration interface as above. The 'Account Tips Prompting' field is now filled with the text 'To start using this service, enter your credentials and click the Connect button.'. The 'Acceptance Policy' field is highlighted with a red box and contains the text 'Acceptance Use Policy.'

注意：在本示例中，输入了“接受使用策略”。

步骤 33在Acceptance Prompting (接受提示) 字段中定义接受使用策略的提示。

Account Tips Prompting: ?	To start using this service, enter your credentials and click the Connect button.
Acceptance Policy: ?	Acceptance Use Policy.
Acceptance Prompting: ?	Check here to indicate that you have read and accepted the Acceptance Use Policy.
No Acceptance Warning: ?	Error: You must acknowledge the Acceptance Use Policy before connecting!

注：在此示例中，选中此处表示您已阅读并接受已输入的“接受使用策略”。

步骤 34在No Acceptance Warning字段中定义未接受使用策略时的提示。

Account Tips Prompting: ?	To start using this service, enter your credentials and click the Connect button.
Acceptance Policy: ?	Acceptance Use Policy.
Acceptance Prompting: ?	Check here to indicate that you have read and accepted the Acceptance Use Policy.
No Acceptance Warning: ?	Error: You must acknowledge the Acceptance Use Policy before connecting!

注意：在本示例中，输入错误：在连接！之前，您必须确认接受使用策略。

步骤 35在Work In Progress Prompting字段中定义正在进行的活动。

No Acceptance Warning: ?	Error: You must acknowledge the Acceptance Use Policy before connecting!
Work In Progress Prompting: ?	Connecting, please wait.
Invalid Credentials Prompting: ?	Error: Invalid Credentials, please try again!
Connect Success Prompting: ?	Congratulations!
Welcome Prompting: ?	You are now authorized and connected to the network.

注意：在本示例中，已输入“正在连接，请稍候。”。

步骤 36在Invalid Credentials Prompting字段中定义无效凭证的提示。

No Acceptance Warning: ?	Error: You must acknowledge the Acceptance Use Policy before connecting!
Work In Progress Prompting: ?	Connecting, please wait.
Invalid Credentials Prompting: ?	Error: Invalid Credentials, please try again!
Connect Success Prompting: ?	Congratulations!
Welcome Prompting: ?	You are now authorized and connected to the network.

注意：在本示例中，输入错误：凭证无效，请重试！。

步骤 37在Connect Success Prompting字段中输入成功连接的提示。

No Acceptance Warning: ?	Error: You must acknowledge the Acceptance Use Policy before connecting!
Work In Progress Prompting: ?	Connecting, please wait.
Invalid Credentials Prompting: ?	Error: Invalid Credentials, please try again!
Connect Success Prompting: ?	Congratulations!
Welcome Prompting: ?	You are now authorized and connected to the network.


注意：在本示例中，已输入“Congratulations！”。

步骤 38在欢迎提示字段中输入欢迎提示。

No Acceptance Warning: ?	Error: You must acknowledge the Acceptance Use Policy before connecting!
Work In Progress Prompting: ?	Connecting, please wait.
Invalid Credentials Prompting: ?	Error: Invalid Credentials, please try again!
Connect Success Prompting: ?	Congratulations!
Welcome Prompting: ?	You are now authorized and connected to the network.

注意：在本示例中，您现在获得授权并连接到网络。

步骤 39在保存设置之前，单击Preview查看强制网络门户。



WAP125

Web Portal Custom

Preview

Web Portal Locale Name: 

Guest Access Instance Name:

这是配置后的外观。



Welcome to the Wireless Network



Enter your Credentials

Username:

Password:

Connect

To start using this service, enter your credentials and click the connect button.

Acceptance Use Policy.

Check here to indicate that you have read and accepted the Acceptance Use Policy.

步骤 40 Click Save.



Web Portal Customization

Save

Restore

Back

Preview

Web Portal Locale Name: ?

SampleGuestLocale

Guest Access Instance Name:

wiz_cp_inst1

Background Image:

cisco_bkg.jpg

Browse

Upload

Logo Image:

cisco_logo.png

Browse

Upload

Foreground Color: ?

#ff1799

Select

Background Color: ?

#c6df9c

Select

Separator Color: ?

#005b7e

Select

Account Image:

login_key.jpg

Browse

Upload

Fonts:

Arial

Account Prompting: ?

Enter your Credentials

Username Prompting: ?

Username:

Password Prompting: ?

Password:

Button Prompting: ?

Connect

Browser Head Prompting: ?

Captive Portal

Portal Title Prompting: ?

Welcome to the Wireless Network

Account Tips Prompting: ?

To start using this service, enter your credentials and click the connect button.

Acceptance Policy: ?

Acceptance Use Policy.

Acceptance Prompting: ?

Check here to indicate that you have read and accepted the Acceptance Use Policy.

No Acceptance Warning: ?

Error: You must acknowledge the Acceptance Use Policy before connecting!

您现在应该已经配置了WAP125或WAP581接入点的访客Web门户区域设置。

观看与本文相关的视频...

[点击此处查看思科的其他技术讲座](#)

关于此翻译

思科采用人工翻译与机器翻译相结合的方式将此文档翻译成不同语言，希望全球的用户都能通过各自的语言得到支持性的内容。

请注意：即使是最好的机器翻译，其准确度也不及专业翻译人员的水平。

Cisco Systems, Inc. 对于翻译的准确性不承担任何责任，并建议您总是参考英文原始文档（已提供链接）。