

클러스터 간 익스텐션 모빌리티 및 익스텐션 모빌리티:CUCM 12.5의 변경 사항

목차

[소개](#)

[사전 요구 사항](#)

[요구 사항](#)

[사용되는 구성 요소](#)

[구성](#)

[12.5 이전](#)

[12.5의 새로운 변화](#)

[문제 해결](#)

[익스텐션 모빌리티에 대한 로그 분석](#)

[사례 1:여러 로그인 허용으로 설정된 다중 로그인 동작](#)

[사례 2:다중 로그인으로 설정된 다중 로그인 동작 허용 안 함](#)

[사례 3:자동 로그아웃\(Auto Logout\)으로 설정된 다중 로그인 동작](#)

[EMCC 로그 분석](#)

[사례 1:여러 로그인 허용으로 설정된 다중 로그인 동작](#)

[사례 2:다중 로그인으로 설정된 다중 로그인 동작 허용 안 함](#)

[사례 3:자동 로그아웃\(Auto Logout\)으로 설정된 다중 로그인 동작](#)

소개

이 문서에서는 클러스터 간 익스텐션 모빌리티를 위한 **다중 로그인 동작** 서비스 매개변수 중 하나의 변경 사항에 대해 설명합니다.

사전 요구 사항

요구 사항

이 문서에 대한 특정 요건이 없습니다.

사용되는 구성 요소

이 문서의 정보는 다음 소프트웨어 및 하드웨어 버전을 기반으로 합니다.

- Cisco Call Manager 버전: 12.5.0.98000-1078 및 12.5.0.99832-3
- Cisco IP Phone 8861
프로토콜:SIP
펌웨어:12-0-1 SR1-1
- Cisco IP Phone 8851
프로토콜:SIP

펌웨어: 12-0-1 SR1-1

이 문서의 정보는 특정 랩 환경의 디바이스를 토대로 작성되었습니다. 이 문서에 사용된 모든 디바이스는 초기화된(기본) 컨피그레이션으로 시작되었습니다. 네트워크가 작동 중인 경우 모든 명령의 잠재적인 영향을 이해해야 합니다.

구성

익스텐션 모빌리티: 사용자가 동일한 클러스터의 다른 Cisco IP Phone에서 Cisco IP Phone 구성(단축 다이얼, 회선 모양)에 임시로 액세스할 수 있습니다.

클러스터 간 익스텐션 모빌리티: 이 기능을 사용하면 한 Cisco CUCM(Unified Communication Manager) 클러스터(일반적으로 홈 클러스터라고 함)의 사용자가 다른 CUCM 클러스터(방문 클러스터라고 함)의 Cisco IP Phone에 로그인할 수 있습니다. 마치 홈 사이트에서 IP Phone을 사용하는 것처럼 말입니다.

12.5 이전

서비스 매개 변수 **클러스터 내 다중 로그인 동작**(시스템 > 서비스 매개 변수를 선택한 다음 통화 관리자 및 확장 모빌리티를 서비스로 선택)이 있습니다. 이 매개 변수는 확장 모빌리티를 위한 여러 로그인을 제어하는 데 사용됩니다. 유효한 값은 다음과 같습니다.

- 허용
사용자는 동시에 여러 전화기에 로그인할 수 있습니다.
- 허용되지 않음
사용자가 전화기 중 하나에 로그인하면 다른 전화기에 로그인할 수 없습니다.
- 자동 로그아웃
사용자가 한 전화기에 로그인한 다음 다른 전화기에 로그인을 시도하면 두 번째 전화기에서 로그인이 성공하며 첫 번째 전화기에서 로그아웃됩니다.

EMCC의 경우 이러한 행동은 없었습니다. 여러 개의 로그인이 항상 허용되었으며, 관리자는 이를 제어할 수 있는 옵션이 없습니다.

12.5의 새로운 변화

이제 EMCC에서는 여러 로그인을 제어할 수 있는 유연성을 제공합니다. Multiple Login Behavior(**다중 로그인 동작(System > Service Parameter)**, Select your call manager and Extension mobility as the service)라는 새로운 서비스 매개 변수가 있어 이를 달성할 수 있습니다. 이전과 동일한 값을 갖습니다.

- 여러 로그인 허용
- 다중 로그인 허용되지 않음
- 자동 로그아웃

참고: 홈 클러스터에 적용되는 서비스 매개 변수 컨피그레이션 설정은 클러스터를 적용하며 클러스터에 방문하지 않습니다.

샘플 시나리오:여러 로그인 동작 매개변수는 홈 클러스터에서 **Multiple Logins Not Allowed(다중 로그인 허용 안 함)** 및 방문 클러스터에서 **다중 로그인**으로 설정됩니다.


방문 클러스터에 로그인한 다음 방문 클러스터의 다른 전화기에 다시 로그인하려고 하면, 이 경우 해당 매개변수는 홈 클러스터에서 **Multiple Logins Not Allowed(여러 로그인 허용 안 됨)**로 설정됩니다.

문제 해결

익스텐션 모빌리티에 대한 로그 분석

사례 1:여러 로그인 허용으로 설정된 다중 로그인 동작

서비스 매개 변수는 다음과 같습니다.

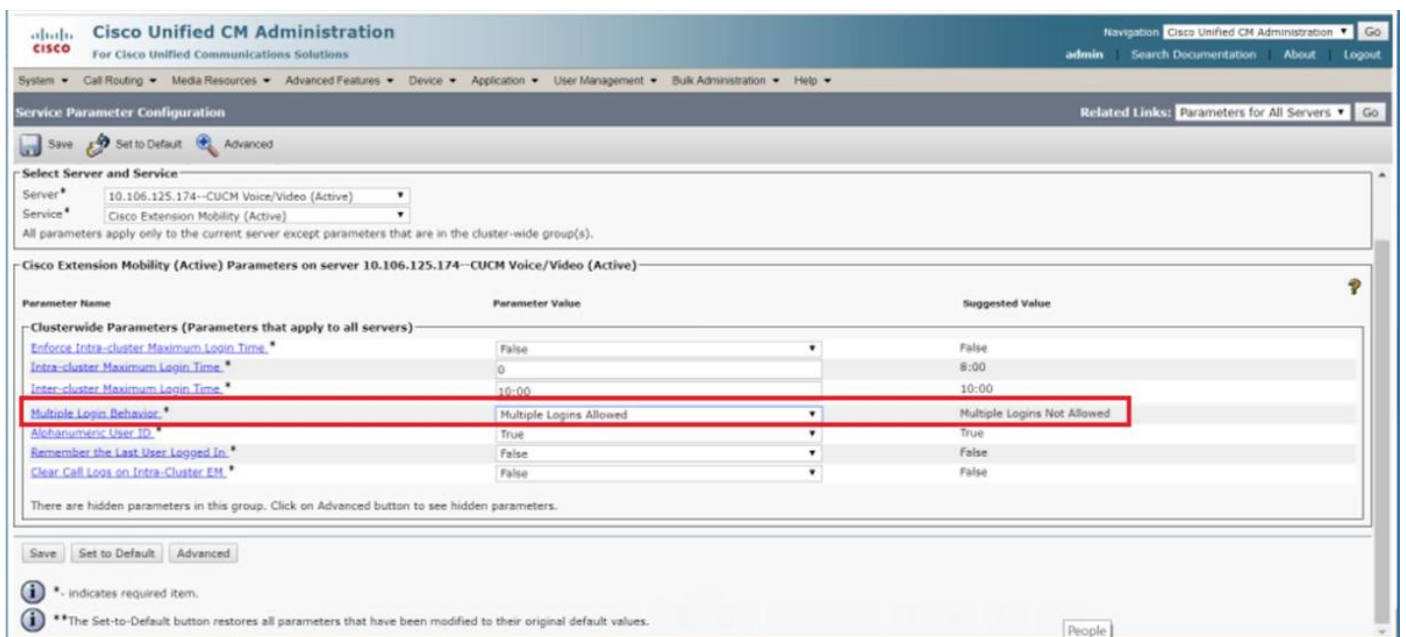

익스텐션 모빌리티 서비스 로그에서 다음 매개변수를 확인할 수 있습니다.

```

2019-01-26 10:55:59,109 INFO [Thread-68 ] ServiceParameters - -----
Begin Service Parameters -----

2019-01-26 10:55:59,109 INFO [Thread-68 ] ServiceParameters - Max Duration
Enabled = false

2019-01-26 10:55:59,109 INFO [Thread-68 ] ServiceParameters - Intra-Cluster
Max Login Duration String = 0

2019-01-26 10:55:59,109 INFO [Thread-68 ] ServiceParameters - Inter-cluster
Max Login Duration String = 10:00

2019-01-26 10:55:59,109 INFO [Thread-68 ] ServiceParameters - Multi Login
Policy = multiOK

2019-01-26 10:55:59,109 INFO [Thread-68 ] ServiceParameters - Max Concurrent
Sessions = 15

2019-01-26 10:55:59,109 INFO [Thread-68 ] ServiceParameters - Is IP Check
  
```

```

Enabled = false

2019-01-26 10:55:59,110 INFO [Thread-68 ] ServiceParameters - Trusted IP List
=

2019-01-26 10:55:59,110 INFO [Thread-68 ] ServiceParameters - EM Device Cache
Size = 10000

2019-01-26 10:55:59,110 INFO [Thread-68 ] ServiceParameters - Allow Proxy
= false


2019-01-26 10:55:59,110 INFO [Thread-68 ] ServiceParameters - EMCC Allow
Proxy = true

2019-01-26 10:55:59,110 INFO [Thread-68 ] ServiceParameters - -----
End Service Parameters -----

```

사례 2:다중 로그인으로 설정된 다중 로그인 동작 허용 안 함

서비스 매개 변수는 다음과 같습니다.

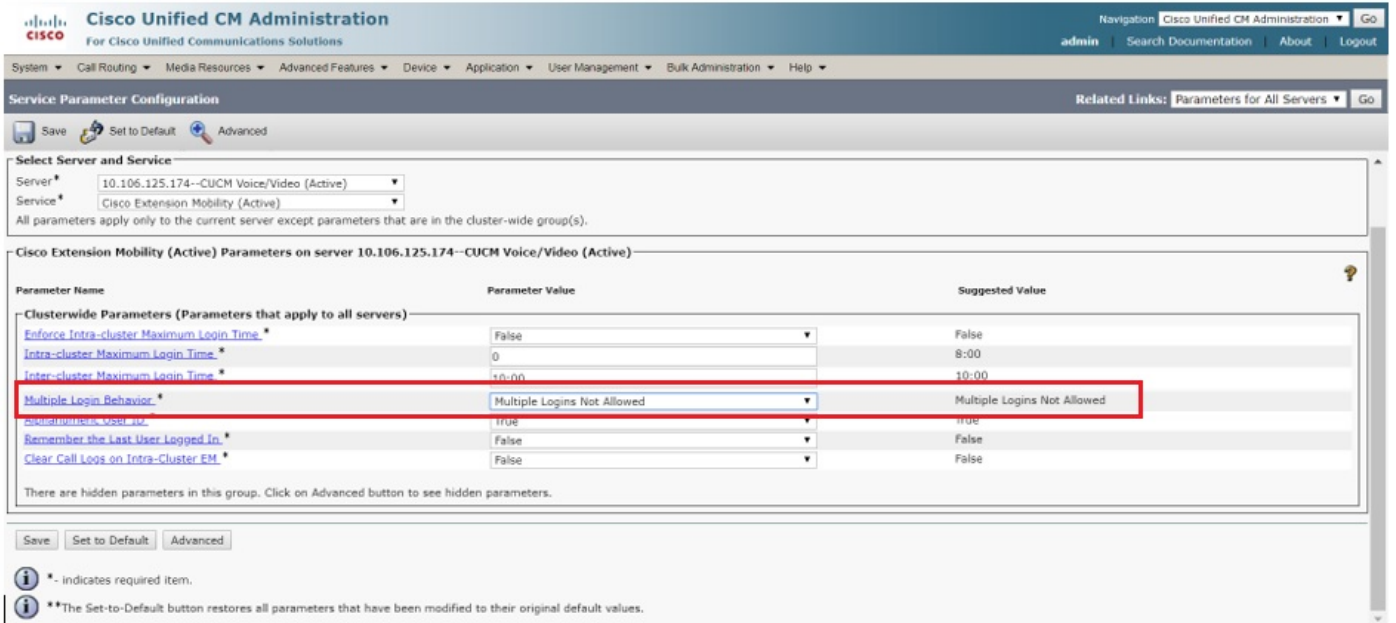

익스텐션 모빌리티 서비스 로그에서 이 매개변수를 매개변수로 볼 수 있습니다.

```

2019-01-24 22:12:15,916 INFO [Thread-68 ] ServiceParameters - -----
Begin Service Parameters -----

2019-01-24 22:12:15,916 INFO [Thread-68 ] ServiceParameters - Max Duration
Enabled = false

2019-01-24 22:12:15,916 INFO [Thread-68 ] ServiceParameters - Intra-Cluster
Max Login Duration String = 0

2019-01-24 22:12:15,916 INFO [Thread-68 ] ServiceParameters - Inter-cluster
Max Login Duration String = 10:00

2019-01-24 22:12:15,916 INFO [Thread-68 ] ServiceParameters - Multi Login
Policy = noLogin

2019-01-24 22:12:15,916 INFO [Thread-68 ] ServiceParameters - Max Concurrent
Sessions = 15

```

```
2019-01-24 22:12:15,916 INFO [Thread-68 ] ServiceParameters - Is IP Check
Enabled = false
2019-01-24 22:12:15,916 INFO [Thread-68 ] ServiceParameters - Trusted IP List
=
2019-01-24 22:12:15,916 INFO [Thread-68 ] ServiceParameters - EM Device Cache
Size = 10000
2019-01-24 22:12:15,917 INFO [Thread-68 ] ServiceParameters - Allow Proxy
= false
2019-01-24 22:12:15,917 INFO [Thread-68 ] ServiceParameters - EMCC Allow
Proxy = true
2019-01-24 22:12:15,917 INFO [Thread-68 ] ServiceParameters - -----
End Service Parameters -----
```

오류가 인쇄되는 방법은 다음과 같습니다.

```
2019-01-26 10:54:45,661 ERROR [http-bio-8443-exec-19] EMServiceServlet - 110:
LoginService: Dev: test2- Error# 25-com.cisco.emservice.MyException: Policy Violation:
com.cisco.emservice.PolicyValidatorException: Not allowed to log into multiple devices.
```

```
2019-01-26 10:54:45,661 INFO [http-bio-8443-exec-19] EMServiceServlet - 110:Request
succeeded returning<response>
```

<failure>

<error code="25">Policy Violation: com.cisco.emservice.PolicyValidatorException: Not allowed to log into multiple devices.

</error>

</failure>

</response>

전화기에 이러한 오류가 있습니다.



사례 3: 자동 로그아웃(Auto Logout)으로 설정된 다중 로그인 동작

서비스 매개 변수는 다음과 같습니다.

Cisco Unified CM Administration

Navigation: Cisco Unified CM Administration | Go

admin | Search Documentation | About | Logout

System | Call Routing | Media Resources | Advanced Features | Device | Application | User Management | Bulk Administration | Help

Service Parameter Configuration | Related Links: Parameters for All Servers | Go

Save | Set to Default | Advanced

Select Server and Service

Server: 10.106.125.174--CUCM Voice/Video (Active)

Service: Cisco Extension Mobility (Active)

All parameters apply only to the current server except parameters that are in the cluster-wide group(s).

Cisco Extension Mobility (Active) Parameters on server 10.106.125.174--CUCM Voice/Video (Active)

Parameter Name	Parameter Value	Suggested Value
Clusterwide Parameters (Parameters that apply to all servers)		
Enforce Intra-cluster Maximum Login Time *	False	False
Intra-cluster Maximum Login Time *	0	8:00
Inter-cluster Maximum Login Time *	10:00	10:00
Multiple Login Behavior *	Auto Logout	Multiple Logins Not Allowed
Alphanumeric User ID *	True	True
Remember the Last User Logged In *	False	False
Clear Call Logs on Intra-Cluster EM *	False	False

There are hidden parameters in this group. Click on Advanced button to see hidden parameters.

Save | Set to Default | Advanced

* - indicates required item.
 ** The Set-to-Default button restores all parameters that have been modified to their original default values.

익스텐션 모빌리티 서비스 로그에서 이 매개변수를 매개변수로 볼 수 있습니다.

```
2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - -----
Begin Service Parameters -----

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - Max Duration
Enabled = false

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - Intra-Cluster
Max Login Duration String = 0

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - Inter-cluster
Max Login Duration String = 10:00

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - Multi Login
Policy = autoLogout

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - Max Concurrent
Sessions = 15

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - Is IP Check
Enabled = false

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - Trusted IP List
=

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - EM Device Cache
Size = 10000

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - Allow Proxy
= false

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - EMCC Allow
Proxy = true

2019-01-26 10:57:30,641 INFO [Thread-68 ] ServiceParameters - -----
End Service Parameters -----
```

EMCC 로그 분석

사례 1: 여러 로그인 허용으로 설정된 다중 로그인 동작

홈 클러스터

EM 서비스 로그에서 다음을 수행합니다.

전화기에서 처음으로 로그인 요청(SEFF8A5C59E1126)

```
2019-01-26 13:45:36,635 DEBUG [http-bio-8443-exec-1] EmccSaxHandler - EMURI =
http%3A%2F%2F10.106.125.174%3A8080%2Femapp%2FEMAppServlet%3Fdevice%3DSEFF8A5C59E1126%26doLogout%
3Dtrue
2019-01-26 13:45:36,637 DEBUG [http-bio-8443-exec-1] EMServiceServlet - 101: Parse Complete
2019-01-26 13:45:36,637 INFO [http-bio-8443-exec-1] EMServiceServlet - 101: Setting remoteIPAddr
to connection IP=10.106.125.174
2019-01-26 13:45:36,637 INFO [http-bio-8443-exec-1] EMServiceServlet - 101 : 137 : atbabu:
processEmccRequest: Received EMCC Home Cluster Login Request for :rak
2019-01-26 13:45:36,637 INFO [http-bio-8443-exec-1] EMServiceServlet - 101 : 137 :
DeviceSecurityMode: 1 HomeCluster SecurityMode: 0
2019-01-26 13:45:36,637 INFO [http-bio-8443-exec-1] EMServiceServlet - 101: authenticate pin for
```

rak
2019-01-26 13:45:36,650 INFO [http-bio-8443-exec-1] EMServiceServlet - 101 : 137 : atbabu:
EmccHomeLogin : Performing Home Device Login for :rak
2019-01-26 13:45:36,650 INFO [http-bio-8443-exec-1] EmccData - 101: getRemoteClusterInfo: Pkid
for cluster atbabu is d23ef9ea-8392-dbbf-61db-1d9e1d505243
2019-01-26 13:45:36,650 DEBUG [http-bio-8443-exec-1] EmccData - 101: getRemoteClusterInfo:
Hostname = 10.106.125.174
2019-01-26 13:45:36,650 INFO [http-bio-8443-exec-1] Authenticator -
101:Authenticator.userExists: UserID: rak- Calling cmdb.isLocalUser(osUserID)...
2019-01-26 13:45:36,650 DEBUG [http-bio-8443-exec-1] CMDatabase - Userid being passed to the
query is rak
2019-01-26 13:45:36,651 DEBUG [http-bio-8443-exec-1] CMDatabase - CMDatabase.isLocalUser() :
SELECT islocaluser FROM EndUser WHERE my_lower(userid)= my_lower(?) : parameter ('rak')
2019-01-26 13:45:36,655 DEBUG [http-bio-8443-exec-1] CMDatabase - PKID for the ROW is
2019-01-26 13:45:36,655 DEBUG [http-bio-8443-exec-1] CMDatabase - CMDatabase.isLocalUser() :
isLocaluser : true
2019-01-26 13:45:36,656 DEBUG [http-bio-8443-exec-1] CMDatabase - is Local user value :true
2019-01-26 13:45:36,656 INFO [http-bio-8443-exec-1] Authenticator -
101:Authenticator.userExists: UserID: rak- cmdb.isLocalUser(osUserID) returned
2019-01-26 13:45:36,656 DEBUG [http-bio-8443-exec-1] EMServiceServlet - 101: 137: atbabu:
performHomeDeviceLogin for deviceName: SEPF8A5C59E1126
2019-01-26 13:45:36,656 INFO [http-bio-8443-exec-1] EMServiceServlet - 101:
computeLoginDuration: Device: SEPF8A5C59E1126 EMCC Request: true EM API Request: false Duration
Requested through EM API: -1
2019-01-26 13:45:36,658 INFO [http-bio-8443-exec-1] CMDatabase -
CMDatabase.getEndUserEmMaxLoginTime() : SELECT EmMaxLoginTime FROM EndUser WHERE userid=? :
parameters ('rak')
2019-01-26 13:45:36,659 INFO [http-bio-8443-exec-1] EMServiceServlet - Effective Login Duration
:36000 seconds
2019-01-26 13:45:36,659 DEBUG [http-bio-8443-exec-1] DBRequestor - 101 : 137 : atbabu:
performHomeDeviceLogin: Excecuting Stored Procedure:

두 번째 전화기에서 동일한 사용자에 대한 요청

2019-01-26 13:45:56,442 DEBUG [http-bio-8443-exec-8] EmccSaxHandler - EMURI =
http%3A%2F%2F10.106.125.174%3A8080%2Femapp%2FEMAppServlet%3Fdevice%3DSEPB000B4BA01F1%26doLogout%
3Dtrue
2019-01-26 13:45:56,442 DEBUG [http-bio-8443-exec-8] EMServiceServlet - 103: Parse Complete
2019-01-26 13:45:56,445 INFO [http-bio-8443-exec-8] EMServiceServlet - 103: Setting remoteIPAddr
to connection IP=10.106.125.174
2019-01-26 13:45:56,445 INFO [http-bio-8443-exec-8] EMServiceServlet - 103 : 139 : atbabu:
processEmccRequest: Received EMCC Home Cluster Login Request for :rak
2019-01-26 13:45:56,445 INFO [http-bio-8443-exec-8] EMServiceServlet - 103 : 139 :
DeviceSecurityMode: 1 HomeCluster SecurityMode: 0
2019-01-26 13:45:56,445 INFO [http-bio-8443-exec-8] EMServiceServlet - 103: authenticate pin for
rak
2019-01-26 13:45:56,469 INFO [http-bio-8443-exec-8] EMServiceServlet - 103 : 139 : atbabu:
EmccHomeLogin : Performing Home Device Login for :rak
2019-01-26 13:45:56,469 INFO [http-bio-8443-exec-8] EmccData - 103: getRemoteClusterInfo: Pkid
for cluster atbabu is d23ef9ea-8392-dbbf-61db-1d9e1d505243
2019-01-26 13:45:56,470 DEBUG [http-bio-8443-exec-8] EmccData - 103: getRemoteClusterInfo:
Hostname = 10.106.125.174
2019-01-26 13:45:56,470 INFO [http-bio-8443-exec-8] Authenticator -
103:Authenticator.userExists: UserID: rak- Calling cmdb.isLocalUser(osUserID)...
2019-01-26 13:45:56,470 DEBUG [http-bio-8443-exec-8] CMDatabase - Userid being passed to the
query is rak
2019-01-26 13:45:56,470 DEBUG [http-bio-8443-exec-8] CMDatabase - CMDatabase.isLocalUser() :
SELECT islocaluser FROM EndUser WHERE my_lower(userid)= my_lower(?) : parameter ('rak')
2019-01-26 13:45:56,476 DEBUG [http-bio-8443-exec-8] CMDatabase - PKID for the ROW is
2019-01-26 13:45:56,477 DEBUG [http-bio-8443-exec-8] CMDatabase - CMDatabase.isLocalUser() :
isLocaluser : true
2019-01-26 13:45:56,478 DEBUG [http-bio-8443-exec-8] CMDatabase - is Local user value :true
2019-01-26 13:45:56,478 INFO [http-bio-8443-exec-8] Authenticator -

103:Authenticator.userExists: UserID: rak- cmdb.isLocalUser(osUserID) returned
2019-01-26 13:45:56,478 DEBUG [http-bio-8443-exec-8] EMServiceServlet - 103: 139: atbabu:
performHomeDeviceLogin for deviceName: SEPB000B4BA01F1
2019-01-26 13:45:56,478 INFO [http-bio-8443-exec-8] EMServiceServlet - 103:
computeLoginDuration: Device: SEPB000B4BA01F1 EMCC Request: true EM API Request: false Duration
Requested through EM API: -1
2019-01-26 13:45:56,482 INFO [http-bio-8443-exec-8] CMDatabase -
CMDatabase.getEndUserEmMaxLoginTime() : SELECT EmMaxLoginTime FROM EndUser WHERE userid=? :
parameters ('rak')
2019-01-26 13:45:56,485 INFO [http-bio-8443-exec-8] EMServiceServlet - Effective Login Duration
:36000 seconds
2019-01-26 13:45:56,485 DEBUG [http-bio-8443-exec-8] DBRequestor - 103 : 139 : atbabu:
performHomeDeviceLogin: Excecuting Stored Procedure:

방문 클러스터

전화기에서 처음으로 로그인 요청(SEFF8A5C59E1126)

2019-01-26 13:45:46,786 DEBUG [mjunnur] EmccCommunicator - 137: postMsg - Url =
https://10.106.106.200:8443/emservice/EMServiceServlet m_iHttpsTimeout = 120000
2019-01-26 13:45:47,055 DEBUG [mjunnur] EmccCommunicator - 137: Retrieved actual user from
remote cluster : 'rak'
2019-01-26 13:45:47,056 DEBUG [mjunnur] EmccCommunicator - 137: performCheckUser: Num of DP is
: 1
2019-01-26 13:45:47,056 DEBUG [mjunnur] CheckUserThread - 137: PerformCheckUser: Home Cluster
for UserId: rak is :https://10.106.106.200:8443/emservice/EMServiceServlet
2019-01-26 13:45:47,056 DEBUG [http-bio-8443-exec-7] EmccData - 137: cacheUserToCluster for
user: rak
2019-01-26 13:45:47,057 INFO [http-bio-8443-exec-7] EMServiceServlet - 137: EmccLoginRequest:
Home Cluster URL for User:rak is : https://10.106.106.200:8443/emservice/EMServiceServlet
2019-01-26 13:45:47,057 INFO [http-bio-8443-exec-7] EMServiceServlet - 137: EmccLoginRequest:
Device Profile for this user is: Prerna-EM
2019-01-26 13:45:47,057 DEBUG [http-bio-8443-exec-7] EMServiceServlet - 137:getEmccLoginInfo -
SEPF8A5C59E1126
2019-01-26 13:45:47,057 DEBUG [http-bio-8443-exec-7] DBRequestor - 137: getEmccLoginInfo: Query
= execute function getEmccLoginInfo('SEPF8A5C59E1126')
2019-01-26 13:45:47,131 DEBUG [http-bio-8443-exec-7] DBRequestor - 137: <VEMAPP>

두 번째 전화기에서 동일한 사용자에 대한 요청

2019-01-26 13:46:06,784 DEBUG [mjunnur] EmccCommunicator - 139: postMsg - Url =
https://10.106.106.200:8443/emservice/EMServiceServlet m_iHttpsTimeout = 120000
2019-01-26 13:46:06,901 DEBUG [mjunnur] EmccCommunicator - 139: Retrieved actual user from
remote cluster : 'rak'
2019-01-26 13:46:06,902 DEBUG [mjunnur] EmccCommunicator - 139: performCheckUser: Num of DP is
: 1
2019-01-26 13:46:06,902 DEBUG [mjunnur] CheckUserThread - 139: PerformCheckUser: Home Cluster
for UserId: rak is :https://10.106.106.200:8443/emservice/EMServiceServlet
2019-01-26 13:46:06,902 DEBUG [http-bio-8443-exec-20] EmccData - 139: cacheUserToCluster for
user: rak
2019-01-26 13:46:06,903 INFO [http-bio-8443-exec-20] EMServiceServlet - 139: EmccLoginRequest:
Home Cluster URL for User:rak is : https://10.106.106.200:8443/emservice/EMServiceServlet
2019-01-26 13:46:06,903 INFO [http-bio-8443-exec-20] EMServiceServlet - 139: EmccLoginRequest:
Device Profile for this user is: Prerna-EM
2019-01-26 13:46:06,903 DEBUG [http-bio-8443-exec-20] EMServiceServlet - 139:getEmccLoginInfo -
SEPB000B4BA01F1
2019-01-26 13:46:06,903 DEBUG [http-bio-8443-exec-20] DBRequestor - 139: getEmccLoginInfo: Query
= execute function getEmccLoginInfo('SEPB000B4BA01F1')
2019-01-26 13:46:06,909 DEBUG [http-bio-8443-exec-20] DBRequestor - 139: <VEMAPP>

로그인 성공

```
2019-01-26 13:46:07,143 INFO [http-bio-8443-exec-20] EMServiceServlet - 139: EmccLoginRequest:
Performing Visiting Device Login for :rak
2019-01-26 13:46:07,144 INFO [http-bio-8443-exec-20] EMServiceServlet -
139:performVisitingDeviceLogin - SEPB000B4BA01F1
2019-01-26 13:46:07,144 DEBUG [http-bio-8443-exec-20] DBRequestor - 139:
performVisitingDeviceLogin: Query:
execute function visitingDeviceLogin('SEPB000B4BA01F1', 'mjunnur',
'http://10.106.125.174:8080/emapp/EMAppServlet?device=SEPB000B4BA01F1&doLogout=true', 'rak',
'10.106.106.200', 'null', '10.106.106.200', 'null')
2019-01-26 13:46:07,166 DEBUG [http-bio-8443-exec-20] DBRequestor - 139: t
2019-01-26 13:46:07,167 DEBUG [http-bio-8443-exec-20] EMServiceServlet - 139: EmccLoginRequest:
Result:
<?xml version="1.0"?>
<response>
<success/>
</response>
```

사례 2:다중 로그인으로 설정된 다중 로그인 동작 허용 안 함

홈 클러스터

첫 번째 사용자에게 대한 요청

```
2019-01-26 14:34:43,093 INFO [http-bio-8443-exec-16] EMServiceServlet - 109 : 142 : atbabu:
processEmccRequest: Received EMCC Home Cluster Login Request for :rak
2019-01-26 14:34:43,093 INFO [http-bio-8443-exec-16] EMServiceServlet - 109 : 142 :
DeviceSecurityMode: 1 HomeCluster SecurityMode: 0
2019-01-26 14:34:43,093 INFO [http-bio-8443-exec-16] EMServiceServlet - 109: authenticate pin
for rak
2019-01-26 14:34:43,112 INFO [http-bio-8443-exec-16] EMServiceServlet - 109 : 142 : atbabu:
EmccHomeLogin : Performing Home Device Login for :rak
2019-01-26 14:34:43,112 INFO [http-bio-8443-exec-16] EmccData - 109: getRemoteClusterInfo: Pkid
for cluster atbabu is d23ef9ea-8392-dbbf-61db-1d9e1d505243
2019-01-26 14:34:43,112 DEBUG [http-bio-8443-exec-16] EmccData - 109: getRemoteClusterInfo:
Hostname = 10.106.125.174
2019-01-26 14:34:43,112 INFO [http-bio-8443-exec-16] Authenticator -
109:Authenticator.userExists: UserID: rak- Calling cmdb.isLocalUser(osUserID)...
2019-01-26 14:34:43,112 DEBUG [http-bio-8443-exec-16] CMDatabase - Userid being passed to the
query is rak
2019-01-26 14:34:43,113 DEBUG [http-bio-8443-exec-16] CMDatabase - CMDatabase.isLocalUser() :
SELECT islocaluser FROM EndUser WHERE my_lower(userid)= my_lower(?) : parameter ( 'rak' )
2019-01-26 14:34:43,119 DEBUG [http-bio-8443-exec-16] CMDatabase - PKID for the ROW is
2019-01-26 14:34:43,119 DEBUG [http-bio-8443-exec-16] CMDatabase - CMDatabase.isLocalUser() :
isLocaluser : true
2019-01-26 14:34:43,119 DEBUG [http-bio-8443-exec-16] CMDatabase - is Local user value :true
2019-01-26 14:34:43,120 INFO [http-bio-8443-exec-16] Authenticator -
109:Authenticator.userExists: UserID: rak- cmdb.isLocalUser(osUserID) returned
2019-01-26 14:34:43,120 DEBUG [http-bio-8443-exec-16] CMDatabase - Userid being passed to the
query is rak
2019-01-26 14:34:43,122 INFO [http-bio-8443-exec-16] CMDatabase -
CMDatabase:getLoggedInDeviceNames: query=SELECT decode(d.tkclass,249,emcd.devicename,d.name)
name FROM Device d left outer join emccdynamice emcd on d.pkid = emcd.fkdevice INNER JOIN
extensionmobilitydynamic emd ON d.pkid=emd.fkdevice AND emd.fkenduser= ? AND emd.logintime is
NOT NULL AND D.tkDeviceProfile=0 : parameter ( '952a2d32-14e5-fd43-d192-742c4a50d5ab' )
2019-01-26 14:34:43,129 DEBUG [http-bio-8443-exec-16] EMServiceServlet - 109: 142: atbabu:
performHomeDeviceLogin for deviceName: SEPF8A5C59E1126
```

동일한 사용자가 두 번째로 허용되지 않습니다.

```
2019-01-26 14:38:05,841 ERROR [http-bio-8443-exec-12] EMServiceServlet - 111: Not allowed to log
into multiple devices.
2019-01-26 14:38:05,841 INFO [http-bio-8443-exec-12] EMServiceServlet - 111: EmccRequest
Processing Time: 38
2019-01-26 14:38:05,842 ERROR [http-bio-8443-exec-12] EMServiceServlet - 111: Error processing
EMCC request :com.cisco.emservice.PolicyValidatorException: Not allowed to log into multiple
devices.
2019-01-26 14:38:05,842 DEBUG [http-bio-8443-exec-12] EMServiceServlet - 111: EMCC: Decrement
Counter
2019-01-26 14:38:05,842 INFO [http-bio-8443-exec-12] Counters - 111: Counters --
>111,31,4,18,0,0,0,15,3,0,33,0,71,3,0
```

방문 클러스터

```
2019-01-26 14:34:53,341 DEBUG [mjunnur ] EmccCommunicator - 142: postMsg - Url =
https://10.106.106.200:8443/emservice/EMServiceServlet m_iHttpsTimeout = 120000
2019-01-26 14:34:53,558 DEBUG [mjunnur ] EmccCommunicator - 142: Retrieved actual user from
remote cluster : 'rak'
2019-01-26 14:34:53,558 DEBUG [mjunnur ] EmccCommunicator - 142: performCheckUser: Num of DP is
: 1
2019-01-26 14:34:53,558 DEBUG [mjunnur ] CheckUserThread - 142: PerformCheckUser: Home Cluster
for UserId: rak is :https://10.106.106.200:8443/emservice/EMServiceServlet
2019-01-26 14:34:53,559 DEBUG [http-bio-8443-exec-16] EmccData - 142: cacheUserToCluster for
user: rak
2019-01-26 14:34:53,560 INFO [http-bio-8443-exec-16] EMServiceServlet - 142: EmccLoginRequest:
Home Cluster URL for User:rak is : https://10.106.106.200:8443/emservice/EMServiceServlet
2019-01-26 14:34:53,560 INFO [http-bio-8443-exec-16] EMServiceServlet - 142: EmccLoginRequest:
Device Profile for this user is: Prerna-EM
2019-01-26 14:34:53,560 DEBUG [http-bio-8443-exec-16] EMServiceServlet - 142:getEmccLoginInfo -
SEPF8A5C59E1126
2019-01-26 14:34:53,560 DEBUG [http-bio-8443-exec-16] DBRequestor - 142: getEmccLoginInfo: Query
= execute function getEmccLoginInfo('SEPF8A5C59E1126')
2019-01-26 14:34:53,576 DEBUG [http-bio-8443-exec-16] DBRequestor - 142: <VEMAPP>
```

로그인했습니다.

```
2019-01-26 14:34:53,822 DEBUG [http-bio-8443-exec-16] EMServiceServlet - 142: EmccLoginRequest:
Result:
<?xml version="1.0"?>
<response>
<success/>
</response>
```

두 번째 전화기에서 로그인을 요청합니다.

```
2019-01-26 14:38:16,081 DEBUG [mjunnur ] EmccCommunicator - 145: postMsg - Url =
https://10.106.106.200:8443/emservice/EMServiceServlet m_iHttpsTimeout = 120000
2019-01-26 14:38:16,287 DEBUG [mjunnur ] EmccCommunicator - 145: Retrieved actual user from
remote cluster : 'rak'
2019-01-26 14:38:16,288 DEBUG [mjunnur ] EmccCommunicator - 145: performCheckUser: Num of DP is
: 1
2019-01-26 14:38:16,288 DEBUG [mjunnur ] CheckUserThread - 145: PerformCheckUser: Home Cluster
for UserId: rak is :https://10.106.106.200:8443/emservice/EMServiceServlet
2019-01-26 14:38:16,290 DEBUG [http-bio-8443-exec-2] EmccData - 145: cacheUserToCluster for
user: rak
2019-01-26 14:38:16,291 INFO [http-bio-8443-exec-2] EMServiceServlet - 145: EmccLoginRequest:
Home Cluster URL for User:rak is : https://10.106.106.200:8443/emservice/EMServiceServlet
2019-01-26 14:38:16,291 INFO [http-bio-8443-exec-2] EMServiceServlet - 145: EmccLoginRequest:
```

Device Profile for this user is: Prerna-EM

```
2019-01-26 14:38:16,291 DEBUG [http-bio-8443-exec-2] EMServiceServlet - 145:getEmccLoginInfo -
SEPB000B4BA01F1
2019-01-26 14:38:16,292 DEBUG [http-bio-8443-exec-2] DBRequestor - 145: getEmccLoginInfo: Query
= execute function getEmccLoginInfo('SEPB000B4BA01F1')
2019-01-26 14:38:16,328 DEBUG [http-bio-8443-exec-2] DBRequestor - 145: <VEMAPP>
```

두 번째 사용자는 로그인할 수 없습니다.

```
2019-01-26 14:38:16,449 DEBUG [http-bio-8443-exec-2] EmccCommunicator - 145:
parseHomeLoginResponse
2019-01-26 14:38:16,452 ERROR [http-bio-8443-exec-2] EmccCommunicator - 145:
handleEmccErrorResponse - 25: Not allowed to log into multiple devices.
2019-01-26 14:38:16,452 ERROR [http-bio-8443-exec-2] EMServiceServlet - 145: Not allowed to log
into multiple devices.
2019-01-26 14:38:16,452 INFO [http-bio-8443-exec-2] EMServiceServlet - 145: EmccRequest
Processing Time: 438
2019-01-26 14:38:16,453 ERROR [http-bio-8443-exec-2] EMServiceServlet - 145: Error processing
EMCC request :com.cisco.emservice.MyException: Not allowed to log into multiple devices.
2019-01-26 14:38:16,453 DEBUG [http-bio-8443-exec-2] EMServiceServlet - 145: EMCC: Decrement
Counter
2019-01-26 14:38:16,453 INFO [http-bio-8443-exec-2] Counters - 145: Counters --
>145,96,29,10,0,0,0,33,34,0,0,0,32,0,21
```

사례 3:자동 로그아웃(Auto Logout)으로 설정된 다중 로그인 동작

홈 클러스터

```
2019-01-26 15:24:47,080 INFO [Thread-6861 ] EmccVisitingLogoutThread - 117EmccLogoutThread:
Logout Request sent to visitng cluster :
https://10.106.125.176:8443/emservice/EMServiceServlet
2019-01-26 15:24:47,080 DEBUG [Thread-6861 ] EmccCommunicator - 117: performDoLogout
2019-01-26 15:24:47,080 DEBUG [Thread-6861 ] EmccCommunicator - 117: formVisitingLogoutXml :
<emcc><visitingLogout><requestNum>117</requestNum><deviceName>SEPF8A5C59E1126</deviceName><clust
erId>mjunnur</clusterId></visitingLogout></emcc>
2019-01-26 15:24:47,080 DEBUG [Thread-6861 ] EmccCommunicator - 117: postMsg - Url =
https://10.106.125.176:8443/emservice/EMServiceServlet m_iHttpsTimeout = 0
2019-01-26 15:24:47,139 DEBUG [http-bio-8443-exec-12] DBRequestor - 117: t
2019-01-26 15:24:47,140 INFO [http-bio-8443-exec-12] LogoutScheduler - 117:
LogoutScheduler.removeLogout(): Dev: SEPF8A5C59E1126- removed logout
2019-01-26 15:24:47,140 INFO [http-bio-8443-exec-12] DBRequestor - 117:
DBRequestor.logoutDevName: Dev: SEPF8A5C59E1126- deviceLogout returned
2019-01-26 15:24:47,141 DEBUG [http-bio-8443-exec-12] EMServiceServlet - 117: 151: atbabu:
performHomeDeviceLogin for deviceName: SEPB000B4BA01F1
2019-01-26 15:24:47,141 INFO [http-bio-8443-exec-12] EMServiceServlet - 117:
computeLoginDuration: Device: SEPB000B4BA01F1 EMCC Request: true EM API Request: false Duration
Requested through EM API: -1
2019-01-26 15:24:47,143 INFO [http-bio-8443-exec-12] CMDatabase -
CMDatabase.getEndUserEmMaxLoginTime() : SELECT EmMaxLoginTime FROM EndUser WHERE userid=? :
parameters ( 'rak')
2019-01-26 15:24:47,152 INFO [http-bio-8443-exec-12] EMServiceServlet - Effective Login Duration
:36000 seconds
```

EM을 구성하려면 다음 링크를 참조하십시오.

<http://www.lerncisco.net/courses/cucm-basics/mobility-features/extension-mobility-configuration.html>

EMCC의 전체 구성에 대해서는 다음 링크를 참조하십시오.

<https://www.cisco.com/c/en/us/support/docs/unified-communications/unified-communications-manager-callmanager/200599-Enable-UC-servers-for-Extension-Mobility.html>