

IPSec与VPN客户端(静态或动态分配IP地址)到VPN 3000集中器的配置示例

目录

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[网络图](#)

[规则](#)

[配置VPN 3000集中器](#)

[为用户分配静态IP地址](#)

[配置 VPN 客户端](#)

[验证](#)

[故障排除](#)

[可能出现的错误](#)

[VPN 客户](#)

[VPN 集中器](#)

[VPN 3000 集中器 – 好的调试示例](#)

[相关信息](#)

[简介](#)

此示例配置演示如何从运行Cisco VPN客户端 (4.x及更高版本) (静态/动态分配的IP地址) 的PC形成IPsec隧道到Cisco VPN 3000集中器，以使用户安全地访问VPN集中器内的网络。

要了解有关使用[Cisco ACS进行RADIUS身份验证的相同方案的详细信息](#)，请参阅[将Cisco Secure ACS用于Windows与VPN 3000集中器 — IPSec](#)。要了解有关[使用MS-RADIUS身份验证的相同方案的详细信息](#)，请参阅[使用MS RADIUS配置Cisco VPN 3000集中器](#)。

[先决条件](#)

[要求](#)

本文档没有任何特定的要求。

[使用的组件](#)

本文档中的信息基于以下软件和硬件版本：


- 思科VPN 3030集中器版本4.1.7.A
- Cisco VPN 客户端 4.x 及更高版本

注意：此配置最近已使用Cisco VPN集中器4.7.2.H版重新测试。

本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始（默认）配置。如果您使用的是真实网络，请确保您已经了解所有命令的潜在影响。

网络图

本文档使用以下网络设置：

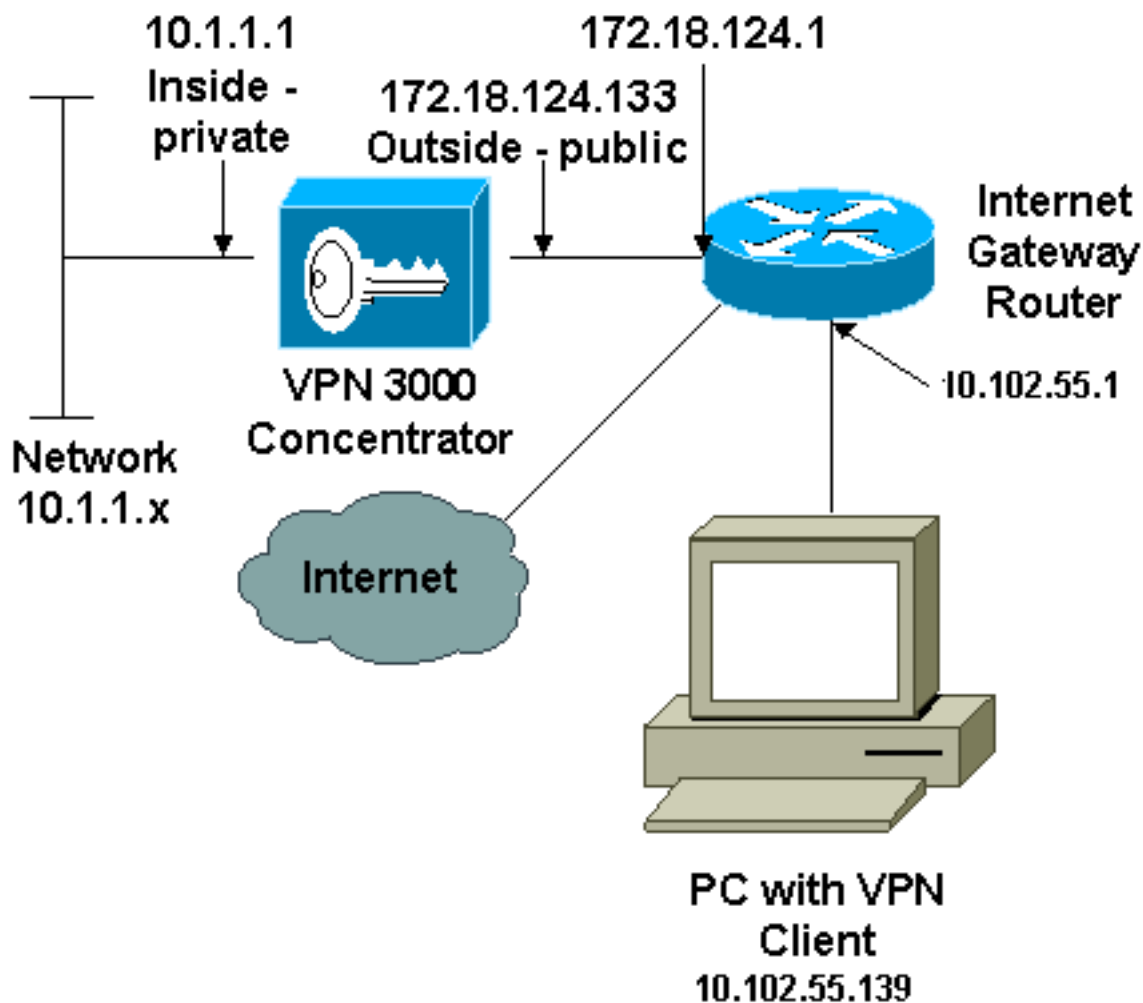

注意：此配置中使用的IP编址方案在Internet上不可合法路由。这些地址是在实验室环境中使用的RFC 1918 地址。

规则

有关文档约定的更多信息，请参考 [Cisco 技术提示约定](#)。

配置VPN 3000集中器

完成这些步骤为了配置VPN 3000集中器。

注意：由于空间限制，某些屏幕截图仅显示部分屏幕。

1. 连接到VPN集中器控制台端口，并验证是否为专用（内部）和公用（外部）接口分配了IP地址。此外，请验证是否已分配默认网关，以便VPN集中器可以将其不知道的目标的数据包转发到默认网关（通常是Internet网关路由器）：

```
97 01/21/2005 12:18:50.300 SEV=3 PSH/23 RPT=1
PSH - Console user "admin" failed login
Login: admin
Password:
```

```
                Welcome to
                Cisco Systems
        VPN 3000 Concentrator Series
        Command Line Interface
Copyright (C) 1998-2004 Cisco Systems, Inc.
```

- 1) Configuration
- 2) Administration
- 3) Monitoring
- 4) Save changes to Config file
- 5) Help Information
- 6) Exit

```
Main -> _
```

```
                Cisco Systems
        VPN 3000 Concentrator Series
        Command Line Interface
Copyright (C) 1998-2004 Cisco Systems, Inc.
```

- 1) Configuration
- 2) Administration
- 3) Monitoring
- 4) Save changes to Config file
- 5) Help Information
- 6) Exit

```
Main -> 1
```

- 1) Interface Configuration
- 2) System Management
- 3) User Management
- 4) Policy Management
- 5) Tunneling and Security
- 6) Back

```
Config -> 1
```

下表显示了当前IP地址。

5) Tunneling and Security

6) Back

Config -> 1

This table shows current IP addresses.

Intf	Status	IP Address/Subnet Mask	MAC Address
Ether1-Pri	UP	10.1.1.1/255.255.255.0	00.90.A4.00.06.94
Ether2-Pub	UP	172.18.124.133/255.255.255.0	00.90.A4.00.06.95
Ether3-Ext	Not Configured	0.0.0.0/0.0.0.0	

DNS Server(s): 10.1.0.121, 10.1.0.122

DNS Domain Name:

Default Gateway: 172.18.124.1

- 1) Configure Ethernet #1 (Private)
- 2) Configure Ethernet #2 (Public)
- 3) Configure Ethernet #3 (External)
- 4) Configure Power Supplies
- 5) Back

Interfaces ->

DNS Domain Name:

Default Gateway: 172.18.124.1

- 1) Configure Ethernet #1 (Private)
- 2) Configure Ethernet #2 (Public)
- 3) Configure Ethernet #3 (External)
- 4) Configure Power Supplies

5) Back

Interfaces -> 5

- 1) Interface Configuration
- 2) System Management
- 3) User Management
- 4) Policy Management
- 5) Tunneling and Security
- 6) Back

Config -> 2

- 1) Servers (Authentication, Authorization, Accounting, DNS, DHCP, etc.)
- 2) Address Management
- 3) IP Routing (static routes, OSPF, etc.)
- 4) Management Protocols (Telnet, TFTP, FTP, etc.)
- 5) Event Configuration
- 6) General Config (system name, time, etc.)
- 7) Client Update
- 8) Load Balancing Configuration
- 9) Back

System -> 3_

8) Load Balancing Configuration
9) Back

System -> 3

1) Static Routes
2) Default Gateways

3) OSPF
4) OSPF Areas
5) DHCP Parameters
6) Redundancy
7) Reverse Route Injection
8) DHCP Relay
9) Back

Routing -> 1

Static Routes

Destination	Mask	Metric	Destination
0.0.0.0	0.0.0.0	1	172.18.124.1
10.0.0.0	255.0.0.0	10	10.1.16.111
192.168.0.0	255.255.0.0	10	10.1.16.111

1) Add Static Route
2) Modify Static Route
3) Delete Static Route
4) Back

Routing ->

8) Load Balancing Configuration
9) Back

System -> 3

1) Static Routes
2) Default Gateways

3) OSPF
4) OSPF Areas
5) DHCP Parameters
6) Redundancy
7) Reverse Route Injection
8) DHCP Relay
9) Back

Routing -> 1

Static Routes

Destination	Mask	Metric	Destination
0.0.0.0	0.0.0.0	1	172.18.124.1

1) Add Static Route
2) Modify Static Route
3) Delete Static Route
4) Back

Routing ->

2. 确保为Public接口选择Public filter选项。



You are modifying the interface you are using to connect to this device. If you make any changes, you will break the connection and you will have to restart from the login screen.

Configuring Ethernet Interface 2 (Public).

General Parameters			
Sel	Attribute	Value	Description
<input type="radio"/>	Disabled		Select to disable this interface.
<input type="radio"/>	DHCP Client		Select to obtain the IP Address, Subnet Mask and Default Gateway via DHCP.
<input checked="" type="radio"/>	Static IP Addressing		Select to configure the IP Address and Subnet Mask.
	IP Address	192.168.1.2	Enter the IP Address and Subnet Mask for this interface.
	Subnet Mask	255.255.255.0	
	Public Interface	<input checked="" type="checkbox"/>	Check to make this interface a "public" interface.
	MAC Address	00.03.A0.89.BF.D1	The MAC address for this interface.
	Filter	2. Public (Default)	Select the filter for this interface.
	Speed	10/100 auto	Select the speed for this interface.

3. 将浏览器指向VPN集中器的内部接口，然后选择Configuration > **System** > Address Management > Address Pools > Add以分配可用的IP地址范围。指定与内部网络中任何其他设备不冲突的IP地址范围：**注意：这些屏幕截图显示外部 — 公共接口管理，因为添加了过滤器以仅在实验设置中允许此操作。**

VPN 3000
Concentrator Series Manager

- [-] Configuration
 - [-] Interfaces
 - [-] System
 - [-] Servers
 - [-] Address Management
 - [-] Assignment
 - Pools
 - [-] IP Routing
 - [-] Management Protocols
 - [-] Events
 - [-] General
 - [-] Client Update
 - [-] Load Balancing
 - [-] User Management
 - [-] Policy Management
 - [-] Tunneling and Security
- [-] Administration
- [-] Monitoring

Configuration | System | Address Management | Pools | Add

Add an address pool.


Range Start Enter the start of the IP pool address range.

Range End Enter the end of the IP pool address range.


Subnet Mask Enter the subnet mask of the IP pool address range.
Enter 0.0.0.0 to use default behavior.

4. 选择Configuration > System > Address Management > Assignment，选中Use Address

Pools框，然后单击Apply以告知VPN集中器使用池。

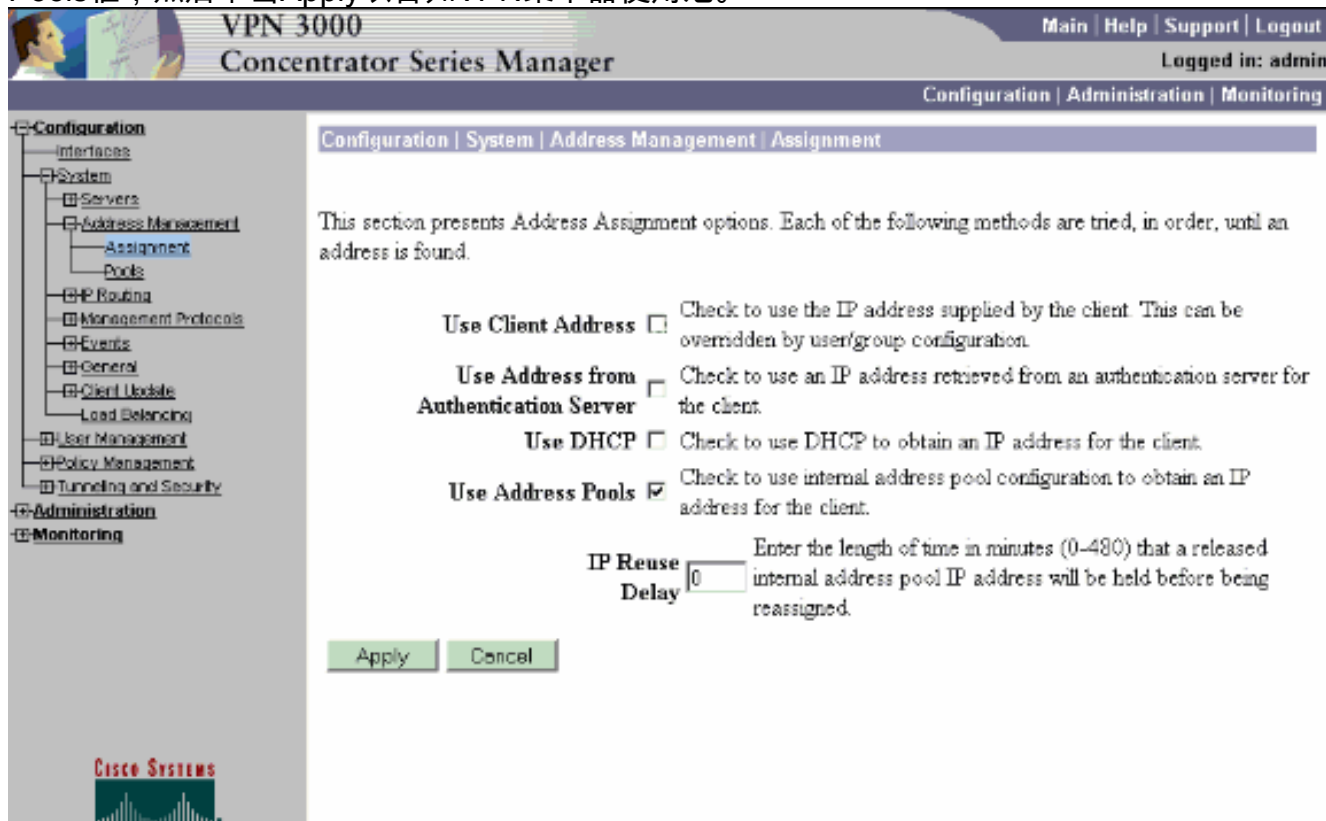

5. 选择Configuration > User Management > Groups > Add Group，以便为用户配置IPsec组并定义组名和密码。本示例使用带密码/verify="cisco123"的group="ipsecgroup":

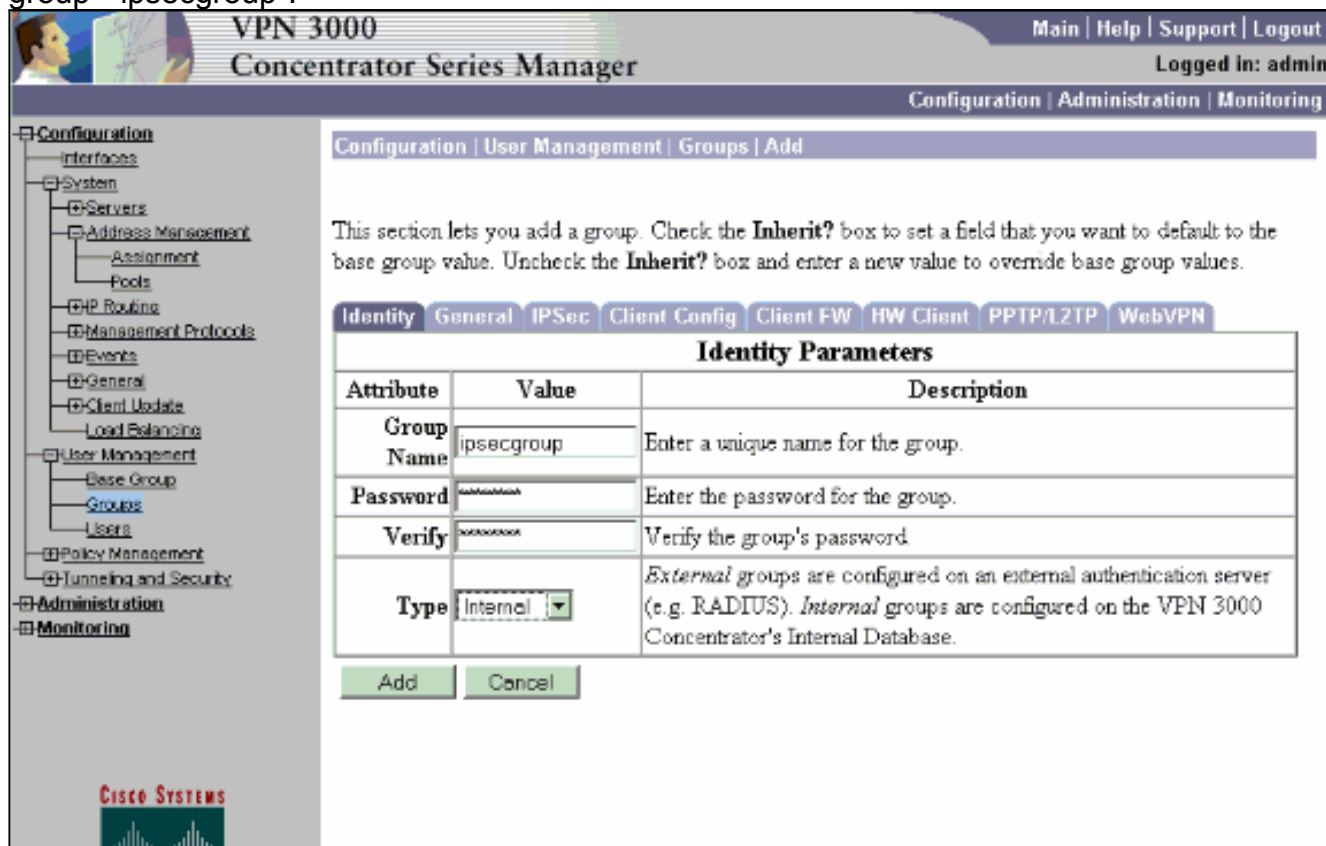

6. 在组的General选项卡上，验证是否已选择IPSec。

VPN 3000 Concentrator Series Manager

Main | Help | Support | Logout

Logged in: admin

Configuration | Administration | Monitoring

Secondary DNS	<input type="text"/>	<input checked="" type="checkbox"/>	secondary DNS server.
Primary WINS	<input type="text"/>	<input checked="" type="checkbox"/>	Enter the IP address of the primary WINS server.
Secondary WINS	<input type="text"/>	<input checked="" type="checkbox"/>	Enter the IP address of the secondary WINS server.
SEP Card Assignment	<input checked="" type="checkbox"/> SEP 1 <input checked="" type="checkbox"/> SEP 2 <input checked="" type="checkbox"/> SEP 3 <input checked="" type="checkbox"/> SEP 4	<input checked="" type="checkbox"/>	Select the SEP cards this group can be assigned to.
Tunneling Protocols	<input checked="" type="checkbox"/> PPTP <input checked="" type="checkbox"/> L2TP <input checked="" type="checkbox"/> IPsec <input type="checkbox"/> L2TP over IPsec <input checked="" type="checkbox"/> WebVPN	<input checked="" type="checkbox"/>	Select the tunneling protocols this group can connect with.
Strip Realm	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Check to remove the realm qualifier of the username during authentication.
DHCP Network Scope	<input type="text"/>	<input checked="" type="checkbox"/>	Enter the IP sub-network to which users within this group will be assigned when using the concentrator as a DHCP Proxy.

Apply Cancel

CISCO SYSTEMS

7. 在组的IPSec选项卡上，验证身份验证是否设置为Internal。选择Configuration > User Management > Groups > Modify Group，然后从“Current Groups”选项中选择ipseccgroup以执行此操作。

VPN 3000 Concentrator Series Manager

Main | Help | Support | Logout


Logged in: admin

Configuration | Administration | Monitoring

Confidence Interval	300	<input checked="" type="checkbox"/>	Specify the number of seconds a peer is permitted to idle before the VPN Concentrator checks to see if it is still connected.
Tunnel Type	Remote Access	<input checked="" type="checkbox"/>	Select the type of tunnel for this group. Update the Remote Access parameters below as needed.
Remote Access Parameters			
Group Lock	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Lock users into this group.
Authentication	Internal	<input checked="" type="checkbox"/>	Select the authentication method for members of this group. This parameter does not apply to Individual User Authentication .
Authorization Type	None	<input checked="" type="checkbox"/>	If members of this group need authorization in addition to authentication, select an authorization method. If you configure

CISCO SYSTEMS

8. 选择Configuration > User Management > Users > Add，然后将用户添加到以前定义的组中。在本示例中，用户是“ipseccuser”，密码为“xyz12345”（在组“ipseccgroup”中）：

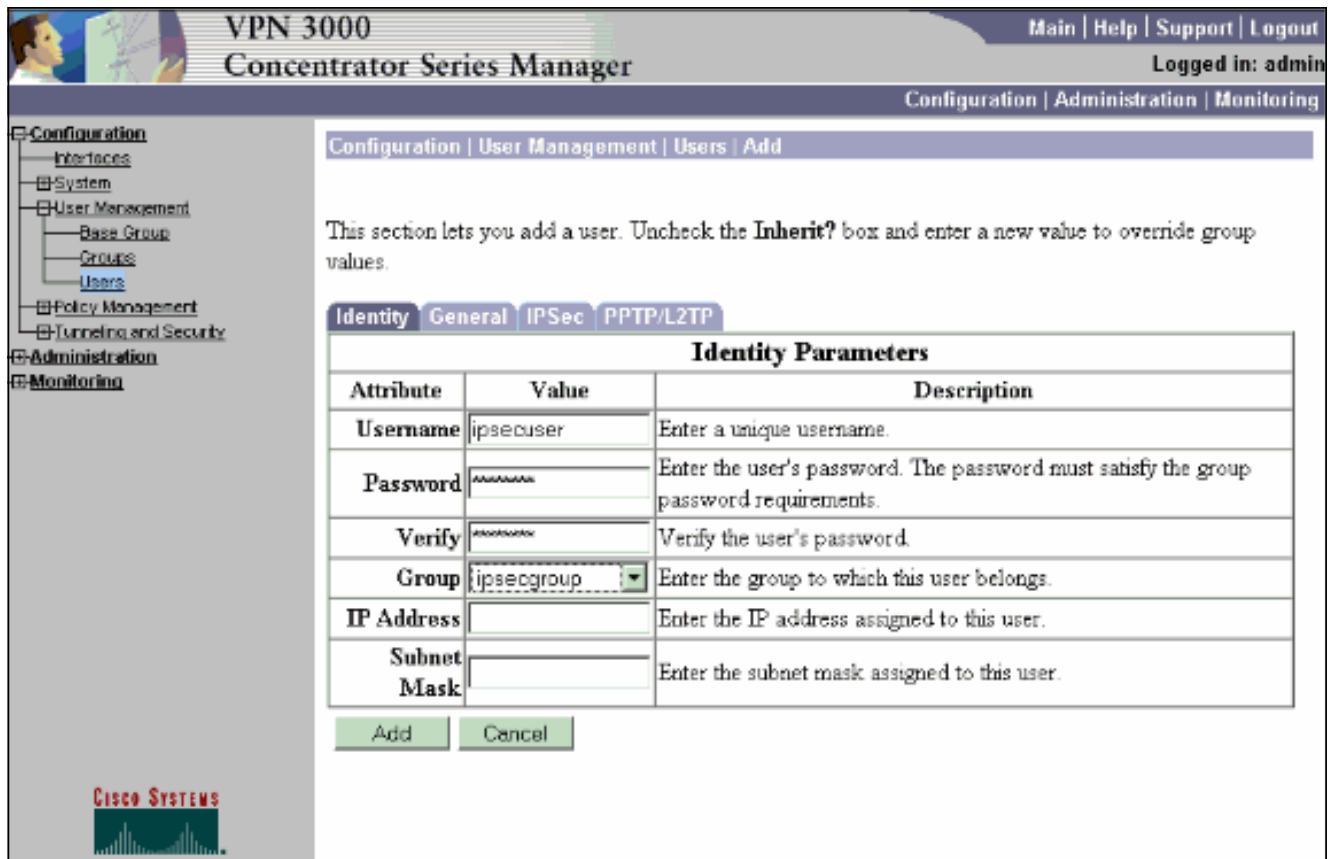

为用户分配静态IP地址

要在远程VPN用户每次连接到VPN 3000系列集中器时为其分配静态IP地址，请选择**Configuration > User Management > Users > Modify ipsecuser2 > identity**。在用户(ipsecuser2)的此配置中，每次用户连接时都会分配静态IP地址10.2.2.1/24。

Configuration | User Management | Users | Modify ipsecuser2

Check the **Inherit?** box to set a field that you want to default to the group value. Uncheck the **Inherit?** box and e values.

Identity Parameters		
Attribute	Value	Description
Username	ipsecuser2	Enter a unique username.
Password	*****	Enter the user's password. The password must satisfy the group password requirements.
Verify	*****	Verify the user's password.
Group	ipsecgroup	Enter the group to which this user belongs.
IP Address	10.2.2.1	Enter the IP address assigned to this user.
Subnet Mask	255.255.255.0	Enter the subnet mask assigned to this user.

Apply Cancel

注意：请务必转到**Configuration > System > Address Management > Assignment**，以确保VPN集中器调配分配的IP地址。选中**Use Address from Authentication Server**，以按用户分配从身份验证服务器检索的IP地址。在User Management > Users > Add or Modify窗口的Identity Parameters选项卡上输入的IP地址和子网掩码被视为位于内部身份验证服务器中。

This section presents Address Assignment options. Each of the following methods are tried, in order, until an address is found.

Use Client Address Check to use the IP address supplied by the client. This can be overridden by user/group configuration.

Use Address from Authentication Server Check to use an IP address retrieved from an authentication server for the client.

Use DHCP Check to use DHCP to obtain an IP address for the client.

Use Address Pools Check to use internal address pool configuration to obtain an IP address for the client.

IP Reuse Delay Enter the length of time in minutes (0-480) that a released internal address pool IP address will be held before being reassigned.


Apply

Cancel


配置 VPN 客户端

执行下列步骤以配置 VPN 客户端。


1. 单击**New**以创建新连接条目。

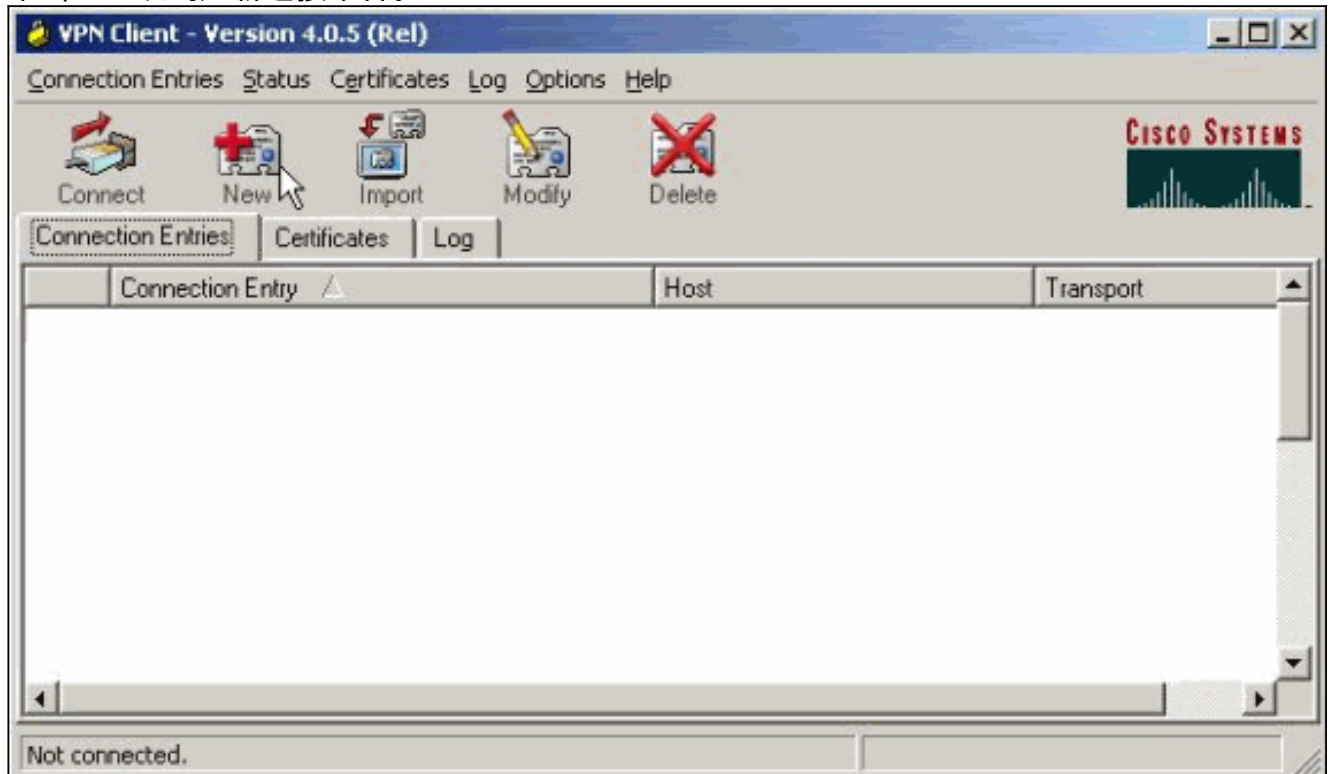

2. 命名连接，输入VPN集中器公共接口的IP地址并提供组凭证。在本例中，名称为 **ipsecgrou**，密码为 **cisco123**。完成后，单击**Save**。

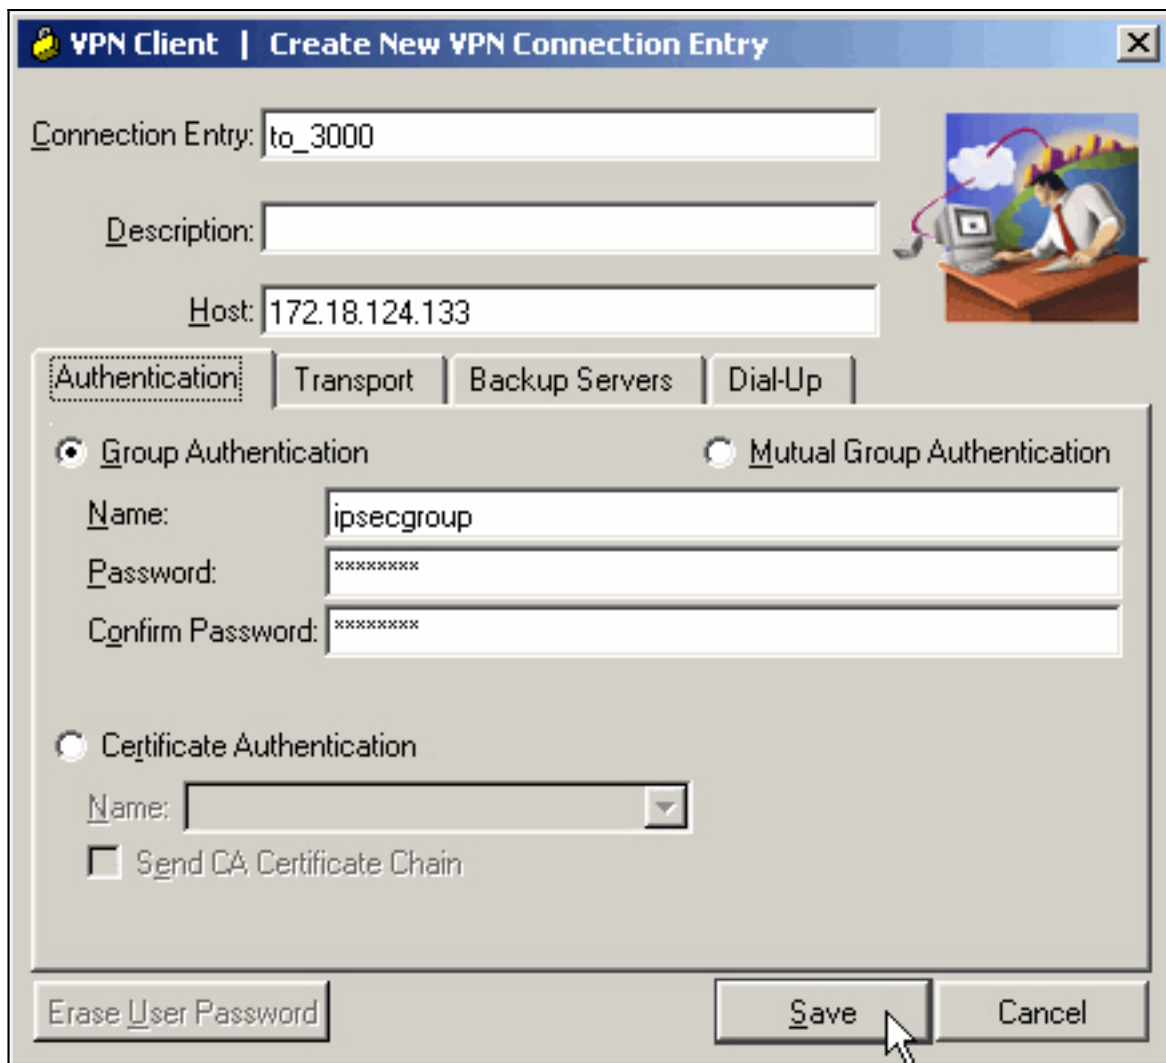

3. 从列表中选择连接条目，然后单击“连接”。当系统提示输入用户名/密码时，输入您的用户名/密码。

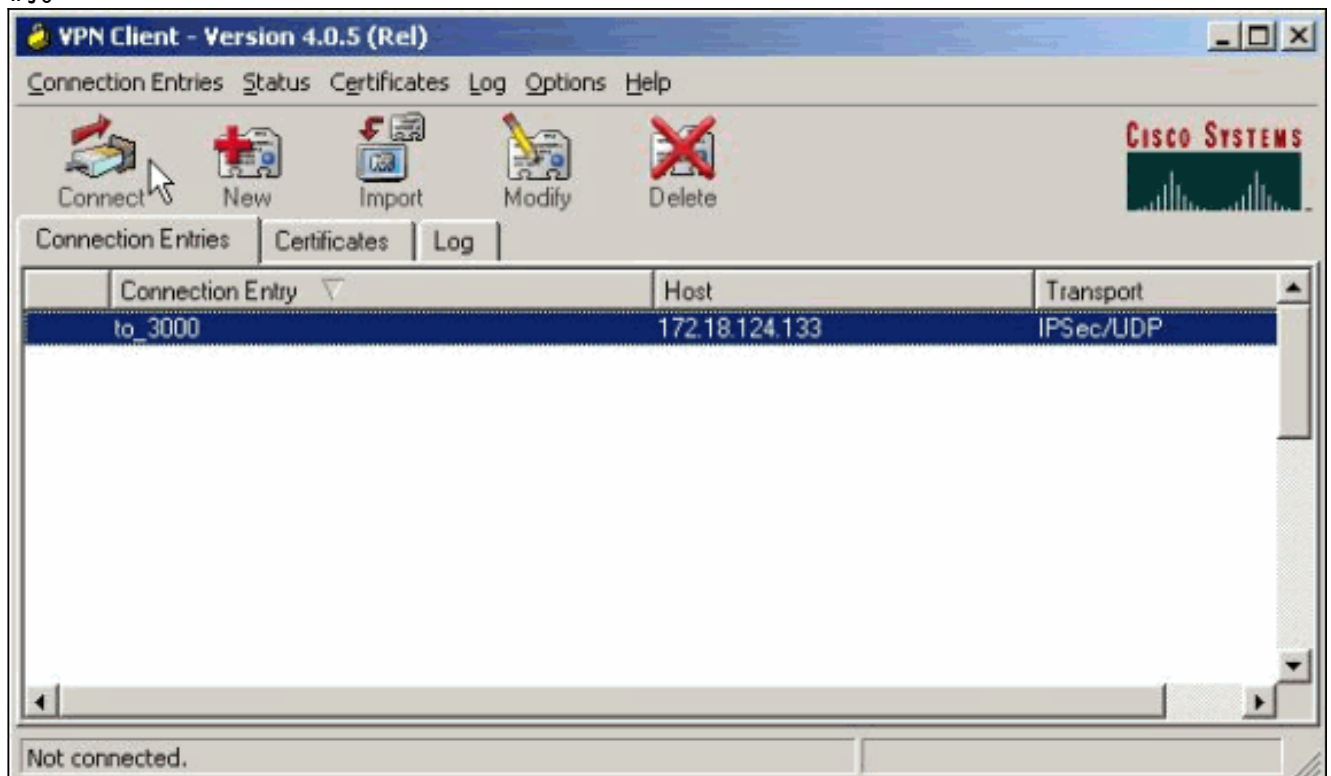

验证

当前没有可用于此配置的验证过程。

故障排除

您可以使用这些部分提供的信息对您的配置进行故障排除。

[命令输出解释程序 \(仅限注册用户\) \(OIT\) 支持某些 show 命令。](#) 使用 OIT 可查看对 show 命令输出的分析。

注意：在发出debug命令之前，[请参阅](#)有关debug命令的重要信息。

可能出现的错误

这些是可能发生的潜在错误。有关这些[错误的解决方法](#)，[请参阅](#)“VPN客户端”和“VPN集中器”部分。

- 用户收到消息“Unable to negotiate IPsec or host don not respondIPsec”。VPN 3000调试显示：
14 02/20/2001 08:59:29.100 SEV=4 IKE/22 RPT=5 10.102.55.139
No Group found matching badgroup for Pre-shared key peer 10.102.55.139
常见原因：用户尝试使用未配置的组名进行连接。
- 用户无法连接，VPN 3000调试显示：
Filter missing on interface 2, IKE data from Peer x.x.x.x dropped
常见原因：公共接口中缺少过滤器。它通常是“公共”过滤器(但可以是私有过滤器；“none”无效)。选择**Configuration > Interfaces > Ethernet 2 > Filter**，并使过滤器为“public”或另一个值(即，不是“none”)。有关如何配置过滤器的详细信息，[请参阅](#)本文档的[配置部分](#)。
- 用户无法连接，看到“IPsec”。VPN 3000调试显示：
Terminating connection attempt: IPSEC not permitted for group >group<
常见原因：组上未选择IPsec。选择**Configuration > User Management > Groups > <group> > Modify > General**，并验证是否在Tunneling Protocols下选中了IPsec。
- 用户在多次尝试后无法连接，并看到“用户”VPN 3000调试显示：
Authentication rejected: Reason = User was not found handle = 14, server = Internal,
user = <user>
常见原因：用户数据库中不存在该用户。确保在显示用户身份验证窗口时输入正确的用户名。
- 用户无法连接，VPN 3000调试显示：
Filter missing on interface 0, IKE data from Peer x.x.x.x dropped
常见原因：缺少默认路由。确保配置中有默认路由。选择**Configuration > System > IP routing > Default Gateway**并指定默认网关。
- 用户无法连接，并IPsec。VPN 3000调试显示：
User [<user>]
IKE rcv'd FAILED IP Addr status!
常见原因：未选中任何选项以为VPN客户端分配IP地址。选择**Configuration > System > Address Management > Address Assignment**并选择一个选项。
- 用户无法连接，并看到VPN 3000调试显示：
The calculated HASH doesn't match the received value
常见原因：VPN客户端上的组密码与VPN集中器上配置的密码不同。检查VPN客户端和集中器上的密码。
- 您已为VPN集中器后的资源设置VPN池。您可以访问资源，但无法对其执行ping操作。**常见原因：**VPN集中器后面有一个PIX，它阻止ICMP数据包。登录到该PIX并应用访问列表以启用ICMP数据包。
- 没有VPN集中器调试，所有或部分用户无法连接。默认VPN集中器公共过滤器包含允许此流量的规则：协议= UDP，端口= 500协议= UDP，端口= 10000协议= ESP协议= AH如果VPN集中

器的过滤器允许此流量，则VPN客户端和VPN集中器之间的设备可能会阻止其中一些端口（可能是防火墙）。要进行验证，请尝试从紧挨在VPN集中器外的网络连接到VPN集中器。如果这样可行，则VPN客户端PC和VPN集中器之间的设备会阻止流量。

- 用户无法连接并看到以下日志：

```
07/10/2006 11:48:59.280 SEV=4 IKE/0 RPT=141 10.86.190.92
```

```
Group [NYMVPN]
```

```
received an unencrypted packet when crypto active!! Dropping packet
```

常见原因：组名称或密码定义不正确。在VPN 3000集中器上为VPN客户端重新创建新组名和密码。

- 用户可以ping或Telnet至VPN集中器后面的主机，但用户无法使用远程桌面(RDP)或类似的应用。常见原因：公共接口上未启用公共过滤器。请参阅本文档[配置VPN 3000集中器](#)部分的步骤2。
- 用户可以连接，但VPN隧道中不会传递任何流量。**常见原因：**未启用NAT透明。在许多情况下，VPN客户端位于PAT设备后面。PAT依靠TCP和UDP端口号来节省地址空间。但封装VPN流量的ESP是TCP或UDP的独立协议。这意味着许多PAT设备无法处理ESP流量。NAT-T将ESP数据包封装在UDP数据包中，使其能够轻松通过PAT设备。因此，为了允许ESP流量通过PAT设备，您需要在集中器上启用NAT-T。有关详细信息，[请参阅在VPN 3000集中器上为IPSec配置NAT透明模式](#)。

[VPN 客户](#)

选择开始 > 程序 > Cisco Systems VPN 3000客户端 > 日志查看器以打开日志查看器。


[VPN 集中器](#)

选择Configuration > System > Events > Classes，以便在发生事件连接故障时启用此调试：

- AUTH — 记录1-13的严重性
- AUTHDBG — 日志1-13的严重性
- IKE — 记录1-13的严重性
- IKEDBG — 日志1-13的严重性
- IPSEC — 记录1-13的严重性
- IPSECDBG — 日志1-13的严重性

注意：如果需要，可以稍后添加AUTHDECODE、IKEDECODE、IPSECDECODE。

有关其他[故障排除详细信息](#)，[请参阅VPN 3000集中器上的连接问题故障排除](#)。

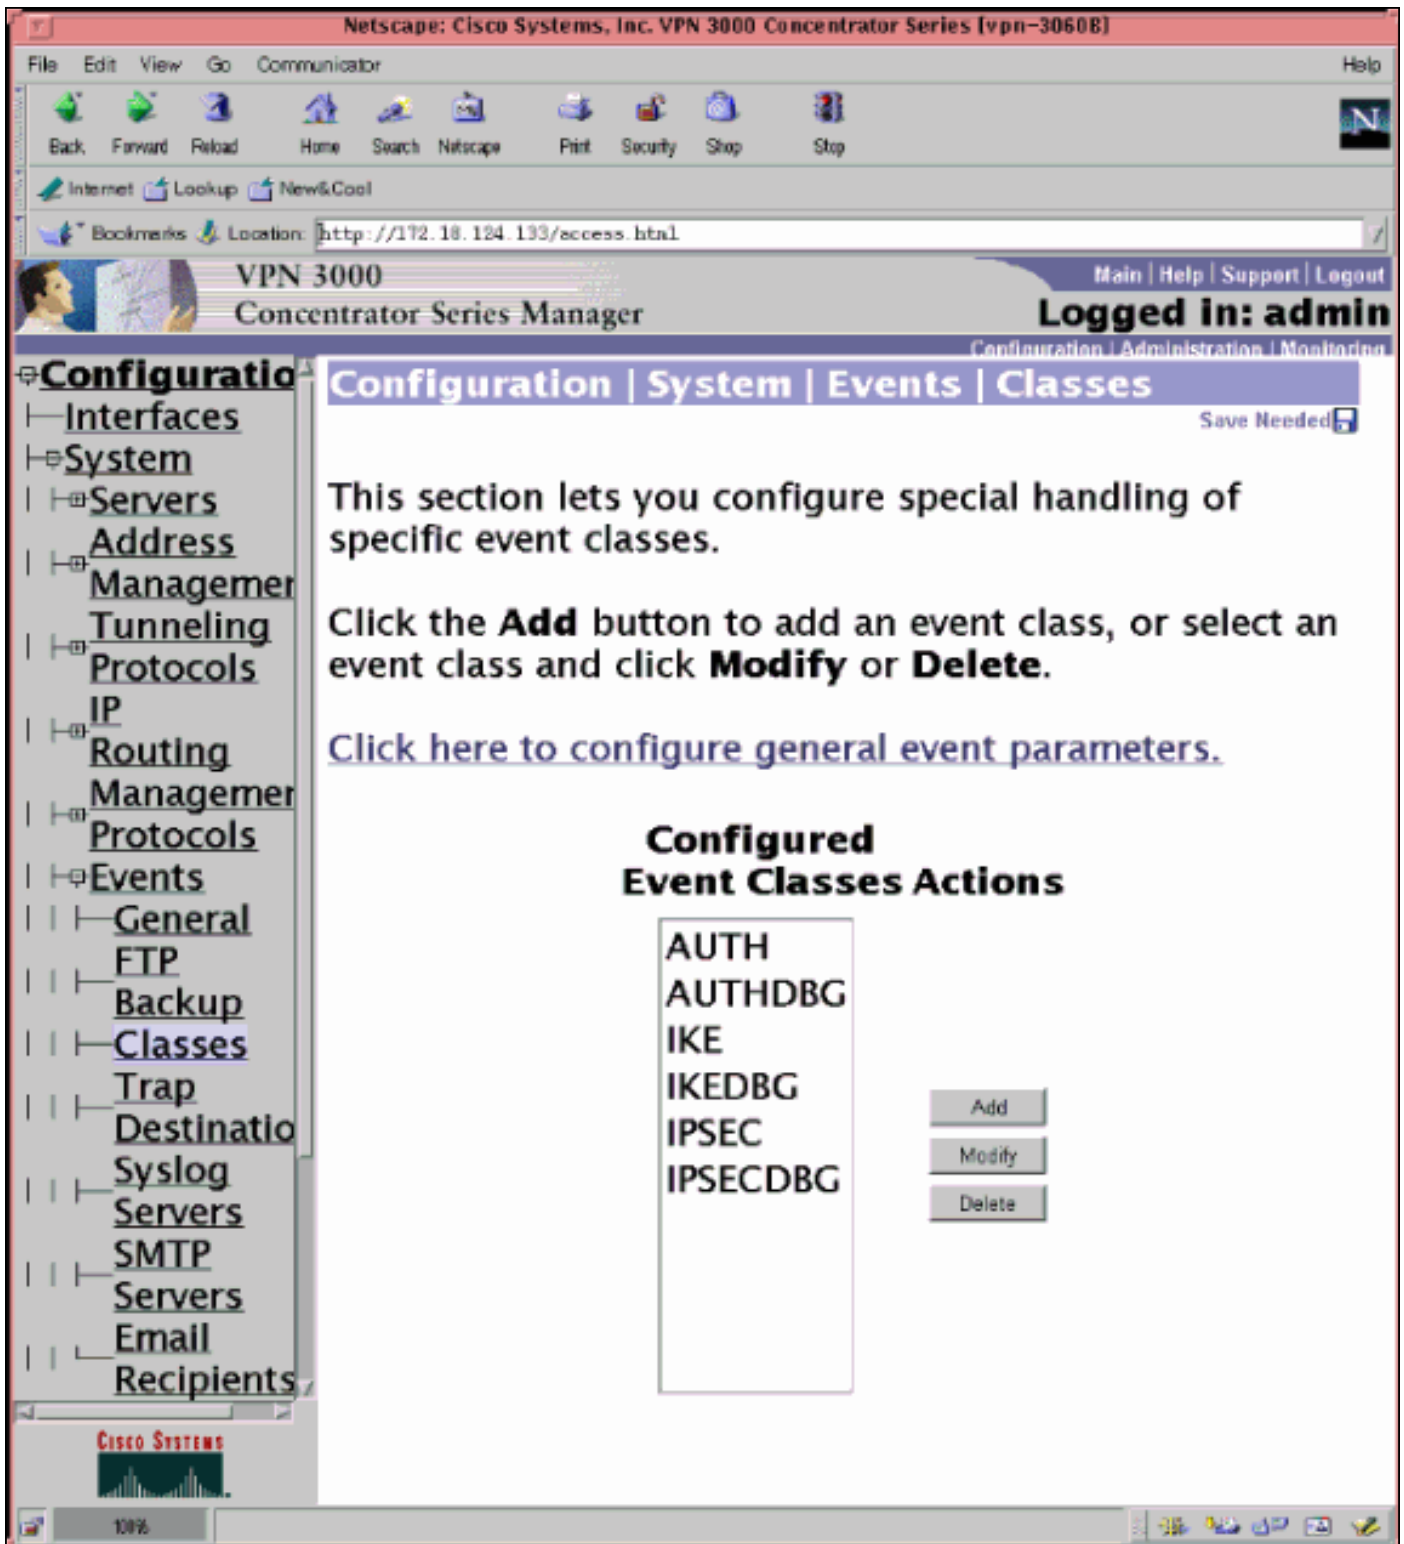

选择Monitoring > Filterable Event Log以查看日志。

VPN 3000 集中器 – 好的调试示例

```
1 02/07/2002 08:00:13.320 SEV=8 IKEDBG/0 RPT=69 172.18.124.241
RECEIVED Message (msgid=0) with payloads :
HDR + SA (1) + KE (4) + NONCE (10) + ID (5) + VENDOR (13) + VENDOR (13) + VENDOR
(13) + NONE (0) ... total length : 562
```

```
4 02/07/2002 08:00:13.320 SEV=9 IKEDBG/0 RPT=70 172.18.124.241
processing SA payload
```


5 02/07/2002 08:00:13.320 SEV=9 IKEDBG/0 RPT=71 172.18.124.241
processing ke payload

6 02/07/2002 08:00:13.320 SEV=9 IKEDBG/0 RPT=72 172.18.124.241
processing ISA_KE

7 02/07/2002 08:00:13.320 SEV=9 IKEDBG/1 RPT=7 172.18.124.241
processing nonce payload

8 02/07/2002 08:00:13.320 SEV=9 IKEDBG/1 RPT=8 172.18.124.241
Processing ID

9 02/07/2002 08:00:13.320 SEV=9 IKEDBG/47 RPT=4 172.18.124.241
processing VID payload

10 02/07/2002 08:00:13.320 SEV=9 IKEDBG/49 RPT=4 172.18.124.241
Received xauth V6 VID

11 02/07/2002 08:00:13.320 SEV=9 IKEDBG/47 RPT=5 172.18.124.241
processing VID payload

12 02/07/2002 08:00:13.320 SEV=9 IKEDBG/49 RPT=5 172.18.124.241
Received DPD VID

13 02/07/2002 08:00:13.320 SEV=9 IKEDBG/47 RPT=6 172.18.124.241
processing VID payload

14 02/07/2002 08:00:13.320 SEV=9 IKEDBG/49 RPT=6 172.18.124.241
Received Cisco Unity client VID

15 02/07/2002 08:00:13.320 SEV=9 IKEDBG/23 RPT=2 172.18.124.241
Starting group lookup for peer 172.18.124.241

16 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/1 RPT=2
AUTH_Open() returns 136

17 02/07/2002 08:00:13.320 SEV=7 AUTH/12 RPT=2
Authentication session opened: handle = 136

18 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/3 RPT=2
AUTH_PutAttrTable(136, 728a84)

19 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/6 RPT=2
AUTH_GroupAuthenticate(136, 9b143bc, 482fb0)

20 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/59 RPT=2
AUTH_BindServer(9a08630, 0, 0)

21 02/07/2002 08:00:13.320 SEV=9 AUTHDBG/69 RPT=2
Auth Server 16b3fa0 has been bound to ACB 9a08630, sessions = 1

22 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/65 RPT=2
AUTH_CreateTimer(9a08630, 0, 0)

23 02/07/2002 08:00:13.320 SEV=9 AUTHDBG/72 RPT=2
Reply timer created: handle = 3B2001B

24 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/61 RPT=2
AUTH_BuildMsg(9a08630, 0, 0)

25 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/64 RPT=2
AUTH_StartTimer(9a08630, 0, 0)

26 02/07/2002 08:00:13.320 SEV=9 AUTHDBG/73 RPT=2

Reply timer started: handle = 3B2001B, timestamp = 10085308, timeout = 30000

27 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/62 RPT=2
AUTH_SndRequest(9a08630, 0, 0)

28 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/50 RPT=3
IntDB_Decode(62b6d00, 115)

29 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/47 RPT=3
IntDB_Xmt(9a08630)

30 02/07/2002 08:00:13.320 SEV=9 AUTHDBG/71 RPT=2
xmit_cnt = 1

31 02/07/2002 08:00:13.320 SEV=8 AUTHDBG/47 RPT=4
IntDB_Xmt(9a08630)

32 02/07/2002 08:00:13.420 SEV=8 AUTHDBG/49 RPT=2
IntDB_Match(9a08630, 2ebe71c)

33 02/07/2002 08:00:13.420 SEV=8 AUTHDBG/63 RPT=2
AUTH_RcvReply(9a08630, 0, 0)

34 02/07/2002 08:00:13.420 SEV=8 AUTHDBG/50 RPT=4
IntDB_Decode(2ebe71c, 44)

35 02/07/2002 08:00:13.420 SEV=8 AUTHDBG/48 RPT=2
IntDB_Rcv(9a08630)

36 02/07/2002 08:00:13.420 SEV=8 AUTHDBG/66 RPT=2
AUTH_DeleteTimer(9a08630, 0, 0)

37 02/07/2002 08:00:13.420 SEV=9 AUTHDBG/74 RPT=2
Reply timer stopped: handle = 3B2001B, timestamp = 10085318

38 02/07/2002 08:00:13.420 SEV=8 AUTHDBG/58 RPT=2
AUTH_Callback(9a08630, 0, 0)

39 02/07/2002 08:00:13.420 SEV=6 AUTH/41 RPT=2 172.18.124.241
Authentication successful: handle = 136, server = Internal, group = ipsecgroup

40 02/07/2002 08:00:13.420 SEV=7 IKEDBG/0 RPT=73 172.18.124.241
Group [ipsecgroup]
Found Phase 1 Group (ipsecgroup)

41 02/07/2002 08:00:13.420 SEV=8 AUTHDBG/4 RPT=2
AUTH_GetAttrTable(136, 728c4c)

42 02/07/2002 08:00:13.420 SEV=7 IKEDBG/14 RPT=2 172.18.124.241
Group [ipsecgroup]
Authentication configured for Internal

43 02/07/2002 08:00:13.420 SEV=8 AUTHDBG/2 RPT=2
AUTH_Close(136)

44 02/07/2002 08:00:13.420 SEV=9 IKEDBG/0 RPT=74 172.18.124.241
Group [ipsecgroup]
processing IKE SA

45 02/07/2002 08:00:13.420 SEV=8 IKEDBG/0 RPT=75 172.18.124.241
Group [ipsecgroup]
Proposal # 1, Transform # 1, Type ISAKMP, Id IKE
Parsing received transform:
Phase 1 failure against global IKE proposal # 1:

Mismatched attr types for class Hash Alg:
Rcv'd: SHA
Cfg'd: MD5

53 02/07/2002 08:00:13.420 SEV=8 IKEDBG/0 RPT=76 172.18.124.241
Group [ipsecgroup]
Phase 1 failure against global IKE proposal # 2:
Mismatched attr types for class Hash Alg:
Rcv'd: SHA
Cfg'd: MD5

53 02/07/2002 08:00:13.420 SEV=8 IKEDBG/0 RPT=77 172.18.124.241
Group [ipsecgroup]
Phase 1 failure against global IKE proposal # 3:
Mismatched attr types for class DH Group:
Rcv'd: Oakley Group 2
Cfg'd: Oakley Group 1

57 02/07/2002 08:00:13.420 SEV=8 IKEDBG/0 RPT=78 172.18.124.241
Group [ipsecgroup]
Phase 1 failure against global IKE proposal # 4:
Mismatched attr types for class DH Group:
Rcv'd: Oakley Group 2
Cfg'd: Oakley Group 1

61 02/07/2002 08:00:13.420 SEV=8 IKEDBG/0 RPT=79 172.18.124.241
Group [ipsecgroup]
Phase 1 failure against global IKE proposal # 5:
Mismatched attr types for class DH Group:
Rcv'd: Oakley Group 2
Cfg'd: Oakley Group 7

65 02/07/2002 08:00:13.420 SEV=8 IKEDBG/0 RPT=80 172.18.124.241
Group [ipsecgroup]
Phase 1 failure against global IKE proposal # 6:
Mismatched attr types for class Hash Alg:
Rcv'd: SHA
Cfg'd: MD5

68 02/07/2002 08:00:13.420 SEV=7 IKEDBG/28 RPT=2 172.18.124.241
Group [ipsecgroup]
IKE SA Proposal # 1, Transform # 2 acceptable
Matches global IKE entry # 1

70 02/07/2002 08:00:13.420 SEV=8 AUTHDBG/60 RPT=2
AUTH_UnbindServer(9a08630, 0, 0)

71 02/07/2002 08:00:13.420 SEV=9 AUTHDBG/70 RPT=2
Auth Server 16b3fa0 has been unbound from ACB 9a08630, sessions = 0

72 02/07/2002 08:00:13.420 SEV=8 AUTHDBG/10 RPT=2
AUTH_Int_FreeAuthCB(9a08630)

73 02/07/2002 08:00:13.420 SEV=7 AUTH/13 RPT=2
Authentication session closed: handle = 136

74 02/07/2002 08:00:13.450 SEV=9 IKEDBG/0 RPT=81 172.18.124.241

Group [ipsecgroup]
constructing ISA_SA for isakmp

75 02/07/2002 08:00:13.450 SEV=9 IKEDBG/0 RPT=82 172.18.124.241
Group [ipsecgroup]
constructing ke payload

76 02/07/2002 08:00:13.450 SEV=9 IKEDBG/1 RPT=9 172.18.124.241
Group [ipsecgroup]
constructing nonce payload

77 02/07/2002 08:00:13.450 SEV=9 IKEDBG/0 RPT=83 172.18.124.241
Group [ipsecgroup]
Generating keys for Responder...

78 02/07/2002 08:00:13.450 SEV=9 IKEDBG/1 RPT=10 172.18.124.241
Group [ipsecgroup]
constructing ID

79 02/07/2002 08:00:13.450 SEV=9 IKEDBG/0 RPT=84
Group [ipsecgroup]
construct hash payload

80 02/07/2002 08:00:13.450 SEV=9 IKEDBG/0 RPT=85 172.18.124.241
Group [ipsecgroup]
computing hash

81 02/07/2002 08:00:13.450 SEV=9 IKEDBG/46 RPT=5 172.18.124.241
Group [ipsecgroup]
constructing Cisco Unity VID payload

82 02/07/2002 08:00:13.450 SEV=9 IKEDBG/46 RPT=6 172.18.124.241
Group [ipsecgroup]
constructing xauth V6 VID payload

83 02/07/2002 08:00:13.450 SEV=9 IKEDBG/46 RPT=7 172.18.124.241
Group [ipsecgroup]
constructing dpd vid payload

84 02/07/2002 08:00:13.450 SEV=9 IKEDBG/46 RPT=8 172.18.124.241
Group [ipsecgroup]
constructing VID payload

85 02/07/2002 08:00:13.450 SEV=9 IKEDBG/48 RPT=2 172.18.124.241
Group [ipsecgroup]
Send Altiga GW VID

86 02/07/2002 08:00:13.450 SEV=8 IKEDBG/0 RPT=86 172.18.124.241
SENDING Message (msgid=0) with payloads :
HDR + SA (1) + KE (4) + NONCE (10) + ID (5) + HASH (8) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR (13) + NONE (0) ... total length : 344

89 02/07/2002 08:00:13.480 SEV=8 IKEDBG/0 RPT=87 172.18.124.241
RECEIVED Message (msgid=0) with payloads :
HDR + HASH (8) + NOTIFY (11) + NONE (0) ... total length : 76

91 02/07/2002 08:00:13.480 SEV=9 IKEDBG/0 RPT=88 172.18.124.241
Group [ipsecgroup]
processing hash

92 02/07/2002 08:00:13.480 SEV=9 IKEDBG/0 RPT=89 172.18.124.241
Group [ipsecgroup]
computing hash

93 02/07/2002 08:00:13.480 SEV=9 IKEDBG/0 RPT=90 172.18.124.241
Group [ipsecgroup]
Processing Notify payload

94 02/07/2002 08:00:13.480 SEV=9 IKEDBG/0 RPT=91 172.18.124.241
Group [ipsecgroup]

constructing blank hash

95 02/07/2002 08:00:13.480 SEV=9 IKEDBG/0 RPT=92 172.18.124.241
Group [lipsecgroup]
constructing qm hash

96 02/07/2002 08:00:13.480 SEV=8 IKEDBG/0 RPT=93 172.18.124.241
SENDING Message (msgid=ec88ba81) with payloads :
HDR + HASH (8) + ATTR (14) + NONE (0) ... total length : 100

98 02/07/2002 08:00:21.810 SEV=8 IKEDBG/0 RPT=94 172.18.124.241
RECEIVED Message (msgid=ec88ba81) with payloads :
HDR + HASH (8) + ATTR (14) + NONE (0) ... total length : 85

100 02/07/2002 08:00:21.810 SEV=9 IKEDBG/1 RPT=11
process_attr(): Enter!

101 02/07/2002 08:00:21.810 SEV=9 IKEDBG/1 RPT=12
Processing MODE_CFG Reply attributes.

102 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/1 RPT=3
AUTH_Open() returns 137

103 02/07/2002 08:00:21.810 SEV=7 AUTH/12 RPT=3
Authentication session opened: handle = 137

104 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/3 RPT=3
AUTH_PutAttrTable(137, 728a84)

105 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/5 RPT=1
AUTH_Authenticate(137, 50093bc, 4b5708)

106 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/59 RPT=3
AUTH_BindServer(9b1544c, 0, 0)

107 02/07/2002 08:00:21.810 SEV=9 AUTHDBG/69 RPT=3
Auth Server 16b3fa0 has been bound to ACB 9b1544c, sessions = 1

108 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/65 RPT=3
AUTH_CreateTimer(9b1544c, 0, 0)

109 02/07/2002 08:00:21.810 SEV=9 AUTHDBG/72 RPT=3
Reply timer created: handle = 3B4001A

110 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/61 RPT=3
AUTH_BuildMsg(9b1544c, 0, 0)

111 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/64 RPT=3
AUTH_StartTimer(9b1544c, 0, 0)

112 02/07/2002 08:00:21.810 SEV=9 AUTHDBG/73 RPT=3
Reply timer started: handle = 3B4001A, timestamp = 10086157, timeout = 30000

113 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/62 RPT=3
AUTH_SndRequest(9b1544c, 0, 0)

114 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/50 RPT=5
IntDB_Decode(62b6d00, 102)

115 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/47 RPT=5
IntDB_Xmt(9b1544c)

116 02/07/2002 08:00:21.810 SEV=9 AUTHDBG/71 RPT=3
xmit_cnt = 1

117 02/07/2002 08:00:21.810 SEV=8 AUTHDBG/47 RPT=6
IntDB_Xmt(9b1544c)

118 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/49 RPT=3
IntDB_Match(9b1544c, 2ebe71c)

119 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/63 RPT=3
AUTH_RcvReply(9b1544c, 0, 0)

120 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/50 RPT=6
IntDB_Decode(2ebe71c, 62)

121 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/48 RPT=3
IntDB_Rcv(9b1544c)

122 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/66 RPT=3
AUTH_DeleteTimer(9b1544c, 0, 0)

123 02/07/2002 08:00:21.910 SEV=9 AUTHDBG/74 RPT=3
Reply timer stopped: handle = 3B4001A, timestamp = 10086167

124 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/58 RPT=3
AUTH_Callback(9b1544c, 0, 0)

125 02/07/2002 08:00:21.910 SEV=6 AUTH/4 RPT=1 172.18.124.241
Authentication successful: handle = 137, server = Internal, user = ipsecuser

126 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/3 RPT=4
AUTH_PutAttrTable(137, 1861c60)

127 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/60 RPT=3
AUTH_UnbindServer(9b1544c, 0, 0)

128 02/07/2002 08:00:21.910 SEV=9 AUTHDBG/70 RPT=3
Auth Server 16b3fa0 has been unbound from ACB 9b1544c, sessions = 0

129 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/59 RPT=4
AUTH_BindServer(9b1544c, 0, 0)

130 02/07/2002 08:00:21.910 SEV=9 AUTHDBG/69 RPT=4
Auth Server 16b3fa0 has been bound to ACB 9b1544c, sessions = 1

131 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/65 RPT=4
AUTH_CreateTimer(9b1544c, 0, 0)

132 02/07/2002 08:00:21.910 SEV=9 AUTHDBG/72 RPT=4
Reply timer created: handle = 3B5001A

133 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/61 RPT=4
AUTH_BuildMsg(9b1544c, 0, 0)

134 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/64 RPT=4
AUTH_StartTimer(9b1544c, 0, 0)

135 02/07/2002 08:00:21.910 SEV=9 AUTHDBG/73 RPT=4
Reply timer started: handle = 3B5001A, timestamp = 10086167, timeout = 30000

136 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/62 RPT=4
AUTH_SndRequest(9b1544c, 0, 0)

137 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/50 RPT=7
IntDB_Decode(2ec5350, 44)

138 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/47 RPT=7
IntDB_Xmt(9b1544c)

139 02/07/2002 08:00:21.910 SEV=9 AUTHDBG/71 RPT=4
xmit_cnt = 1

140 02/07/2002 08:00:21.910 SEV=8 AUTHDBG/47 RPT=8
IntDB_Xmt(9b1544c)

141 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/49 RPT=4
IntDB_Match(9b1544c, 2ec3f64)

142 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/63 RPT=4
AUTH_RcvReply(9b1544c, 0, 0)

143 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/50 RPT=8
IntDB_Decode(2ec3f64, 44)

144 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/48 RPT=4
IntDB_Rcv(9b1544c)

145 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/66 RPT=4
AUTH_DeleteTimer(9b1544c, 0, 0)

146 02/07/2002 08:00:22.010 SEV=9 AUTHDBG/74 RPT=4
Reply timer stopped: handle = 3B5001A, timestamp = 10086177

147 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/58 RPT=4
AUTH_Callback(9b1544c, 0, 0)

148 02/07/2002 08:00:22.010 SEV=6 AUTH/41 RPT=3 172.18.124.241
Authentication successful: handle = 137, server = Internal, group = ipsecgroup

149 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/3 RPT=5
AUTH_PutAttrTable(137, 1861c60)

150 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/60 RPT=4
AUTH_UnbindServer(9b1544c, 0, 0)

151 02/07/2002 08:00:22.010 SEV=9 AUTHDBG/70 RPT=4
Auth Server 16b3fa0 has been unbound from ACB 9b1544c, sessions = 0

152 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/59 RPT=5
AUTH_BindServer(9b1544c, 0, 0)

153 02/07/2002 08:00:22.010 SEV=9 AUTHDBG/69 RPT=5
Auth Server 16b3fa0 has been bound to ACB 9b1544c, sessions = 1

154 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/65 RPT=5
AUTH_CreateTimer(9b1544c, 0, 0)

155 02/07/2002 08:00:22.010 SEV=9 AUTHDBG/72 RPT=5
Reply timer created: handle = 3B6001A

156 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/61 RPT=5
AUTH_BuildMsg(9b1544c, 0, 0)

157 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/64 RPT=5
AUTH_StartTimer(9b1544c, 0, 0)

158 02/07/2002 08:00:22.010 SEV=9 AUTHDBG/73 RPT=5
Reply timer started: handle = 3B6001A, timestamp = 10086177, timeout = 30000

159 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/62 RPT=5
AUTH_SndRequest(9b1544c, 0, 0)

160 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/50 RPT=9
IntDB_Decode(2ec39ec, 44)

161 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/47 RPT=9
IntDB_Xmt(9b1544c)

162 02/07/2002 08:00:22.010 SEV=9 AUTHDBG/71 RPT=5
xmit_cnt = 1

163 02/07/2002 08:00:22.010 SEV=8 AUTHDBG/47 RPT=10
IntDB_Xmt(9b1544c)

164 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/49 RPT=5
IntDB_Match(9b1544c, 2ec5350)

165 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/63 RPT=5
AUTH_RcvReply(9b1544c, 0, 0)

166 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/50 RPT=10
IntDB_Decode(2ec5350, 44)

167 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/48 RPT=5
IntDB_Rcv(9b1544c)

168 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/66 RPT=5
AUTH_DeleteTimer(9b1544c, 0, 0)

169 02/07/2002 08:00:22.110 SEV=9 AUTHDBG/74 RPT=5
Reply timer stopped: handle = 3B6001A, timestamp = 10086187

170 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/58 RPT=5
AUTH_Callback(9b1544c, 0, 0)

171 02/07/2002 08:00:22.110 SEV=6 AUTH/41 RPT=4 172.18.124.241
Authentication successful: handle = 137, server = Internal, group = ipsecgroup

172 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/4 RPT=3
AUTH_GetAttrTable(137, 729c04)

173 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/4 RPT=4
AUTH_GetAttrTable(137, 728c4c)

174 02/07/2002 08:00:22.110 SEV=7 IKEDBG/14 RPT=3 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Authentication configured for Internal

175 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/2 RPT=3
AUTH_Close(137)

176 02/07/2002 08:00:22.110 SEV=4 IKE/52 RPT=61 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
User (ipsecuser) authenticated.

177 02/07/2002 08:00:22.110 SEV=9 IKEDBG/0 RPT=95 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing blank hash

178 02/07/2002 08:00:22.110 SEV=9 IKEDBG/0 RPT=96 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing qm hash

179 02/07/2002 08:00:22.110 SEV=8 IKEDBG/0 RPT=97 172.18.124.241
SENDING Message (msgid=4cc78f4e) with payloads :
HDR + HASH (8) + ATTR (14) + NONE (0) ... total length : 60

181 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/60 RPT=5
AUTH_UnbindServer(9b1544c, 0, 0)

182 02/07/2002 08:00:22.110 SEV=9 AUTHDBG/70 RPT=5
Auth Server 16b3fa0 has been unbound from ACB 9b1544c, sessions = 0

183 02/07/2002 08:00:22.110 SEV=8 AUTHDBG/10 RPT=3
AUTH_Int_FreeAuthCB(9b1544c)

184 02/07/2002 08:00:22.110 SEV=7 AUTH/13 RPT=3
Authentication session closed: handle = 137

185 02/07/2002 08:00:22.110 SEV=8 IKEDBG/0 RPT=98 172.18.124.241
RECEIVED Message (msgid=4cc78f4e) with payloads :
HDR + HASH (8) + ATTR (14) + NONE (0) ... total length : 56

187 02/07/2002 08:00:22.110 SEV=9 IKEDBG/1 RPT=13
process_attr(): Enter!

188 02/07/2002 08:00:22.110 SEV=9 IKEDBG/1 RPT=14
Processing cfg ACK attributes

189 02/07/2002 08:00:22.180 SEV=8 IKEDBG/0 RPT=99 172.18.124.241
RECEIVED Message (msgid=38a7c320) with payloads :
HDR + HASH (8) + ATTR (14) + NONE (0) ... total length : 154

191 02/07/2002 08:00:22.180 SEV=9 IKEDBG/1 RPT=15
process_attr(): Enter!

192 02/07/2002 08:00:22.180 SEV=9 IKEDBG/1 RPT=16
Processing cfg Request attributes

193 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=1
MODE_CFG: Received request for IPV4 address!

194 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=2
MODE_CFG: Received request for IPV4 net mask!

195 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=3
MODE_CFG: Received request for DNS server address!

196 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=4
MODE_CFG: Received request for WINS server address!

197 02/07/2002 08:00:22.180 SEV=6 IKE/130 RPT=1 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Received unsupported transaction mode attribute: 5

199 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=5
MODE_CFG: Received request for Application Version!

200 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=6
MODE_CFG: Received request for Banner!

201 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=7
MODE_CFG: Received request for Save PW setting!

202 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=8
MODE_CFG: Received request for Default Domain Name!

203 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=9
MODE_CFG: Received request for Split Tunnel List!

204 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=10
MODE_CFG: Received request for PFS setting!

205 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=11
MODE_CFG: Received request for FWTYPE!

206 02/07/2002 08:00:22.180 SEV=9 IKEDBG/53 RPT=12
MODE_CFG: Received request for UDP Port!

207 02/07/2002 08:00:22.180 SEV=9 IKEDBG/31 RPT=1 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Obtained IP addr (10.1.1.100) prior to initiating Mode Cfg (XAuth enabled)

209 02/07/2002 08:00:22.180 SEV=9 IKEDBG/0 RPT=100 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing blank hash

210 02/07/2002 08:00:22.180 SEV=9 IKEDBG/0 RPT=101 172.18.124.241
0000: 00010004 0A010164 F0010000 F0070000d.....
0010: 00070062 43697363 6F205379 7374656D ...bCisco System
0020: 732C2049 6E632E2F 56504E20 33303030 s, Inc./VPN 3000
0030: 20436F6E 63656E74 7261746F 72205665 Concentrator Ve
0040: 7273696F 6E20332E 352E5265 6C206275 rsion 3.5.Rel bu
0050: 696C7420 62792076 6D757270 6879206F ilt by vmurphy o

216 02/07/2002 08:00:22.180 SEV=9 IKEDBG/0 RPT=102 172.18.124.241
0000: 6E204E6F 76203237 20323030 31203131 n Nov 27 2001 11
0010: 3A32323A 3331 :22:31

218 02/07/2002 08:00:22.180 SEV=9 IKEDBG/0 RPT=103 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing qm hash

219 02/07/2002 08:00:22.180 SEV=8 IKEDBG/0 RPT=104 172.18.124.241
SENDING Message (msgid=38a7c320) with payloads :
HDR + HASH (8) + ATTR (14) + NONE (0) ... total length : 174

221 02/07/2002 08:00:22.190 SEV=9 IKEDBG/21 RPT=1 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Delay Quick Mode processing, Cert/Trans Exch/RM DSID in progress

223 02/07/2002 08:00:22.190 SEV=4 AUTH/22 RPT=86
User ipsecuser connected

224 02/07/2002 08:00:22.190 SEV=7 IKEDBG/22 RPT=1 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Resume Quick Mode processing, Cert/Trans Exch/RM DSID completed

226 02/07/2002 08:00:22.200 SEV=4 IKE/119 RPT=68 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
PHASE 1 COMPLETED

227 02/07/2002 08:00:22.200 SEV=6 IKE/121 RPT=1 172.18.124.241
Keep-alive type for this connection: DPD

228 02/07/2002 08:00:22.200 SEV=7 IKEDBG/0 RPT=105 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Starting phase 1 rekey timer: 82080000 (ms)

229 02/07/2002 08:00:22.200 SEV=9 IKEDBG/0 RPT=106 172.18.124.241
Group [ipsecgroup] User [ipsecuser]

sending notify message

230 02/07/2002 08:00:22.200 SEV=9 IKEDBG/0 RPT=107 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing blank hash

231 02/07/2002 08:00:22.200 SEV=9 IKEDBG/0 RPT=108 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing qm hash

232 02/07/2002 08:00:22.200 SEV=8 IKEDBG/0 RPT=109 172.18.124.241
SENDING Message (msgid=be237358) with payloads :
HDR + HASH (8) + NOTIFY (11) + NONE (0) ... total length : 88

234 02/07/2002 08:00:22.200 SEV=8 IKEDBG/0 RPT=110 172.18.124.241
RECEIVED Message (msgid=472c326b) with payloads :
HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) + NONE (0) ... total length : 792

237 02/07/2002 08:00:22.200 SEV=9 IKEDBG/0 RPT=111 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing hash

238 02/07/2002 08:00:22.200 SEV=9 IKEDBG/0 RPT=112 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing SA payload

239 02/07/2002 08:00:22.200 SEV=9 IKEDBG/1 RPT=17 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing nonce payload

240 02/07/2002 08:00:22.200 SEV=9 IKEDBG/1 RPT=18 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Processing ID

241 02/07/2002 08:00:22.200 SEV=5 IKE/25 RPT=62 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Received remote Proxy Host data in ID Payload:
Address 10.1.1.100, Protocol 0, Port 0

244 02/07/2002 08:00:22.200 SEV=9 IKEDBG/1 RPT=19 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Processing ID

245 02/07/2002 08:00:22.200 SEV=5 IKE/24 RPT=61 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Received local Proxy Host data in ID Payload:
Address 172.18.124.133, Protocol 0, Port 0

248 02/07/2002 08:00:22.200 SEV=8 IKEDBG/0 RPT=113
QM IsRekeyed old sa not found by addr

249 02/07/2002 08:00:22.200 SEV=5 IKE/66 RPT=121 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
IKE Remote Peer configured for SA: ESP-3DES-MD5

251 02/07/2002 08:00:22.200 SEV=9 IKEDBG/0 RPT=114 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing IPSEC SA

252 02/07/2002 08:00:22.200 SEV=8 IKEDBG/0 RPT=115
Proposal # 2, Transform # 1, Type ESP, Id Triple-DES
Parsing received transform:
Phase 2 failure:

Mismatched attr types for class HMAC Algorithm:

Rcv'd: SHA

Cfg'd: MD5

256 02/07/2002 08:00:22.200 SEV=7 IKEDBG/27 RPT=1 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

IPSec SA Proposal # 3, Transform # 1 acceptable

258 02/07/2002 08:00:22.200 SEV=7 IKEDBG/0 RPT=116 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

IKE: requesting SPI!

259 02/07/2002 08:00:22.200 SEV=9 IPSECDBG/6 RPT=1

IPSEC key message parse - msgtype 6, len 200, vers 1, pid 00000000, seq 129, err 0, type 2, mode 0, state 32, label 0, pad 0, spi 00000000, encrKeyLen 0, hashKeyLen 0, ivlen 0, alg 0, hmacAlg 0, lifetype 0, lifetime1 708648, lifetime2 0, dsId 300

263 02/07/2002 08:00:22.200 SEV=9 IPSECDBG/1 RPT=1

Processing KEY_GETSPI msg!

264 02/07/2002 08:00:22.200 SEV=7 IPSECDBG/13 RPT=1

Reserved SPI 1037485220

265 02/07/2002 08:00:22.200 SEV=8 IKEDBG/6 RPT=1

IKE got SPI from key engine: SPI = 0x3dd6c4a4

266 02/07/2002 08:00:22.200 SEV=9 IKEDBG/0 RPT=117 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

oakley constructing quick mode

267 02/07/2002 08:00:22.200 SEV=9 IKEDBG/0 RPT=118 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

constructing blank hash

268 02/07/2002 08:00:22.200 SEV=9 IKEDBG/0 RPT=119 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

constructing ISA_SA for ipsec

269 02/07/2002 08:00:22.200 SEV=5 IKE/75 RPT=121 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

Overriding Initiator's IPSec rekeying duration from 2147483 to 28800 seconds

271 02/07/2002 08:00:22.200 SEV=9 IKEDBG/1 RPT=20 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

constructing ipsec nonce payload

272 02/07/2002 08:00:22.200 SEV=9 IKEDBG/1 RPT=21 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

constructing proxy ID

273 02/07/2002 08:00:22.200 SEV=7 IKEDBG/0 RPT=120 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

Transmitting Proxy Id:

Remote host: 10.1.1.100 Protocol 0 Port 0

Local host: 172.18.124.133 Protocol 0 Port 0

277 02/07/2002 08:00:22.200 SEV=7 IKEDBG/0 RPT=121 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

Sending RESPONDER LIFETIME notification to Initiator

279 02/07/2002 08:00:22.200 SEV=9 IKEDBG/0 RPT=122 172.18.124.241

Group [ipsecgroup] User [ipsecuser]

constructing qm hash

280 02/07/2002 08:00:22.200 SEV=8 IKEDBG/0 RPT=123 172.18.124.241
SENDING Message (msgid=472c326b) with payloads :
HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) + NOTIFY (11) + NONE (0)
... total length : 172

283 02/07/2002 08:00:22.210 SEV=8 IKEDBG/0 RPT=124 172.18.124.241
RECEIVED Message (msgid=64c59a32) with payloads :
HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) + NONE (0) ... total length : 796

286 02/07/2002 08:00:22.210 SEV=9 IKEDBG/0 RPT=125 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing hash

287 02/07/2002 08:00:22.210 SEV=9 IKEDBG/0 RPT=126 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing SA payload

288 02/07/2002 08:00:22.210 SEV=9 IKEDBG/1 RPT=22 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing nonce payload

289 02/07/2002 08:00:22.210 SEV=9 IKEDBG/1 RPT=23 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Processing ID

290 02/07/2002 08:00:22.210 SEV=5 IKE/25 RPT=63 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Received remote Proxy Host data in ID Payload:
Address 10.1.1.100, Protocol 0, Port 0

293 02/07/2002 08:00:22.210 SEV=9 IKEDBG/1 RPT=24 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Processing ID

294 02/07/2002 08:00:22.210 SEV=5 IKE/34 RPT=61 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Received local IP Proxy Subnet data in ID Payload:
Address 0.0.0.0, Mask 0.0.0.0, Protocol 0, Port 0

297 02/07/2002 08:00:22.210 SEV=8 IKEDBG/0 RPT=127
QM IsRekeyed old sa not found by addr

298 02/07/2002 08:00:22.210 SEV=5 IKE/66 RPT=122 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
IKE Remote Peer configured for SA: ESP-3DES-MD5

300 02/07/2002 08:00:22.210 SEV=9 IKEDBG/0 RPT=128 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing IPSEC SA

301 02/07/2002 08:00:22.210 SEV=8 IKEDBG/0 RPT=129
Proposal # 2, Transform # 1, Type ESP, Id Triple-DES
Parsing received transform:
Phase 2 failure:
Mismatched attr types for class HMAC Algorithm:
Rcv'd: SHA
Cfg'd: MD5

305 02/07/2002 08:00:22.210 SEV=7 IKEDBG/27 RPT=2 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
IPSec SA Proposal # 3, Transform # 1 acceptable

307 02/07/2002 08:00:22.210 SEV=7 IKEDBG/0 RPT=130 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
IKE: requesting SPI!

308 02/07/2002 08:00:22.210 SEV=9 IPSECDBG/6 RPT=2
IPSEC key message parse - msgtype 6, len 200, vers 1, pid 00000000, seq 130, err
0, type 2, mode 0, state 32, label 0, pad 0, spi 00000000, encrKeyLen 0, hashKe
yLen 0, ivlen 0, alg 0, hmacAlg 0, lifetype 0, lifetime1 708648, lifetime2 0, ds
Id 300

312 02/07/2002 08:00:22.210 SEV=9 IPSECDBG/1 RPT=2
Processing KEY_GETSPI msg!

313 02/07/2002 08:00:22.210 SEV=7 IPSECDBG/13 RPT=2
Reserved SPI 1517437317

314 02/07/2002 08:00:22.210 SEV=8 IKEDBG/6 RPT=2
IKE got SPI from key engine: SPI = 0x5a724185

315 02/07/2002 08:00:22.210 SEV=9 IKEDBG/0 RPT=131 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
oakley constructing quick mode

316 02/07/2002 08:00:22.210 SEV=9 IKEDBG/0 RPT=132 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing blank hash

317 02/07/2002 08:00:22.210 SEV=9 IKEDBG/0 RPT=133 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing ISA_SA for ipsec

318 02/07/2002 08:00:22.210 SEV=5 IKE/75 RPT=122 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Overriding Initiator's IPSec rekeying duration from 2147483 to 28800 seconds

320 02/07/2002 08:00:22.210 SEV=9 IKEDBG/1 RPT=25 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing ipsec nonce payload

321 02/07/2002 08:00:22.210 SEV=9 IKEDBG/1 RPT=26 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing proxy ID

322 02/07/2002 08:00:22.210 SEV=7 IKEDBG/0 RPT=134 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Transmitting Proxy Id:
Remote host: 10.1.1.100 Protocol 0 Port 0
Local subnet: 0.0.0.0 mask 0.0.0.0 Protocol 0 Port 0

326 02/07/2002 08:00:22.210 SEV=7 IKEDBG/0 RPT=135 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Sending RESPONDER LIFETIME notification to Initiator

328 02/07/2002 08:00:22.210 SEV=9 IKEDBG/0 RPT=136 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
constructing qm hash

329 02/07/2002 08:00:22.220 SEV=8 IKEDBG/0 RPT=137 172.18.124.241
SENDING Message (msgid=64c59a32) with payloads :
HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) + NOTIFY (11) + NONE (0)
... total length : 176

332 02/07/2002 08:00:22.220 SEV=8 IKEDBG/0 RPT=138 172.18.124.241
RECEIVED Message (msgid=472c326b) with payloads :

HDR + HASH (8) + NONE (0) ... total length : 48

334 02/07/2002 08:00:22.220 SEV=9 IKEDBG/0 RPT=139 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing hash

335 02/07/2002 08:00:22.220 SEV=9 IKEDBG/0 RPT=140 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
loading all IPSEC SAs

336 02/07/2002 08:00:22.220 SEV=9 IKEDBG/1 RPT=27 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Generating Quick Mode Key!

337 02/07/2002 08:00:22.220 SEV=9 IKEDBG/1 RPT=28 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Generating Quick Mode Key!

338 02/07/2002 08:00:22.220 SEV=7 IKEDBG/0 RPT=141 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Loading host:
 Dst: 172.18.124.133
 Src: 10.1.1.100

340 02/07/2002 08:00:22.220 SEV=4 IKE/49 RPT=129 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Security negotiation complete for User (ipsecuser)
Responder, Inbound SPI = 0x3dd6c4a4, Outbound SPI = 0x8104887e

343 02/07/2002 08:00:22.220 SEV=9 IPSECDBG/6 RPT=3
IPSEC key message parse - msgtype 1, len 624, vers 1, pid 00000000, seq 0, err 0
, type 2, mode 1, state 64, label 0, pad 0, spi 8104887e, encrKeyLen 24, hashKey
Len 16, ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 708648, lifetime2 0, ds
Id 0

347 02/07/2002 08:00:22.220 SEV=9 IPSECDBG/1 RPT=3
Processing KEY_ADD msg!

348 02/07/2002 08:00:22.220 SEV=9 IPSECDBG/1 RPT=4
key_msghdr2secassoc(): Enter

349 02/07/2002 08:00:22.220 SEV=7 IPSECDBG/1 RPT=5
No USER filter configured

350 02/07/2002 08:00:22.220 SEV=9 IPSECDBG/1 RPT=6
KeyProcessAdd: Enter

351 02/07/2002 08:00:22.220 SEV=8 IPSECDBG/1 RPT=7
KeyProcessAdd: Adding outbound SA

352 02/07/2002 08:00:22.220 SEV=8 IPSECDBG/1 RPT=8
KeyProcessAdd: src 172.18.124.133 mask 0.0.0.0, dst 10.1.1.100 mask 0.0.0.0

353 02/07/2002 08:00:22.220 SEV=8 IPSECDBG/1 RPT=9
KeyProcessAdd: FilterIpsecAddIkeSa success

354 02/07/2002 08:00:22.220 SEV=9 IPSECDBG/6 RPT=4
IPSEC key message parse - msgtype 3, len 336, vers 1, pid 00000000, seq 0, err 0
, type 2, mode 1, state 32, label 0, pad 0, spi 3dd6c4a4, encrKeyLen 24, hashKey
Len 16, ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 708648, lifetime2 0, ds
Id 0

358 02/07/2002 08:00:22.220 SEV=9 IPSECDBG/1 RPT=10
Processing KEY_UPDATE msg!

359 02/07/2002 08:00:22.220 SEV=9 IPSECDBG/1 RPT=11
Update inbound SA addresses

360 02/07/2002 08:00:22.220 SEV=9 IPSECDBG/1 RPT=12
key_msghdr2secassoc(): Enter

361 02/07/2002 08:00:22.220 SEV=7 IPSECDBG/1 RPT=13
No USER filter configured

362 02/07/2002 08:00:22.220 SEV=9 IPSECDBG/1 RPT=14
KeyProcessUpdate: Enter

363 02/07/2002 08:00:22.220 SEV=8 IPSECDBG/1 RPT=15
KeyProcessUpdate: success

364 02/07/2002 08:00:22.220 SEV=8 IKEDBG/7 RPT=1
IKE got a KEY_ADD msg for SA: SPI = 0x8104887e

365 02/07/2002 08:00:22.220 SEV=8 IKEDBG/0 RPT=142
pitcher: rcv KEY_UPDATE, spi 0x3dd6c4a4

366 02/07/2002 08:00:22.220 SEV=4 IKE/120 RPT=129 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
PHASE 2 COMPLETED (msgid=472c326b)

367 02/07/2002 08:00:22.280 SEV=8 IKEDBG/0 RPT=143 172.18.124.241
RECEIVED Message (msgid=64c59a32) with payloads :
HDR + HASH (8) + NONE (0) ... total length : 48

369 02/07/2002 08:00:22.280 SEV=9 IKEDBG/0 RPT=144 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
processing hash

370 02/07/2002 08:00:22.280 SEV=9 IKEDBG/0 RPT=145 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
loading all IPSEC SAs

371 02/07/2002 08:00:22.280 SEV=9 IKEDBG/1 RPT=29 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Generating Quick Mode Key!

372 02/07/2002 08:00:22.280 SEV=9 IKEDBG/1 RPT=30 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Generating Quick Mode Key!

373 02/07/2002 08:00:22.280 SEV=7 IKEDBG/0 RPT=146 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Loading subnet:
Dst: 0.0.0.0 mask: 0.0.0.0
Src: 10.1.1.100

375 02/07/2002 08:00:22.280 SEV=4 IKE/49 RPT=130 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
Security negotiation complete for User (ipsecuser)
Responder, Inbound SPI = 0x5a724185, Outbound SPI = 0x285e6ed0

378 02/07/2002 08:00:22.280 SEV=9 IPSECDBG/6 RPT=5
IPSEC key message parse - msgtype 1, len 624, vers 1, pid 00000000, seq 0, err 0
, type 2, mode 1, state 64, label 0, pad 0, spi 285e6ed0, encrKeyLen 24, hashKey
Len 16, ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 708648, lifetime2 0, ds
Id 0

382 02/07/2002 08:00:22.280 SEV=9 IPSECDBG/1 RPT=16

Processing KEY_ADD msg!

383 02/07/2002 08:00:22.280 SEV=9 IPSECDBG/1 RPT=17
key_msghdr2secassoc(): Enter

384 02/07/2002 08:00:22.280 SEV=7 IPSECDBG/1 RPT=18
No USER filter configured

385 02/07/2002 08:00:22.280 SEV=9 IPSECDBG/1 RPT=19
KeyProcessAdd: Enter

386 02/07/2002 08:00:22.280 SEV=8 IPSECDBG/1 RPT=20
KeyProcessAdd: Adding outbound SA

387 02/07/2002 08:00:22.280 SEV=8 IPSECDBG/1 RPT=21
KeyProcessAdd: src 0.0.0.0 mask 255.255.255.255, dst 10.1.1.100 mask 0.0.0.0

388 02/07/2002 08:00:22.280 SEV=8 IPSECDBG/1 RPT=22
KeyProcessAdd: FilterIpsecAddIkeSa success

389 02/07/2002 08:00:22.280 SEV=9 IPSECDBG/6 RPT=6
IPSEC key message parse - msgtype 3, len 336, vers 1, pid 00000000, seq 0, err 0
, type 2, mode 1, state 32, label 0, pad 0, spi 5a724185, encrKeyLen 24, hashKey
Len 16, ivlen 8, alg 2, hmacAlg 3, lifetype 0, lifetime1 708648, lifetime2 0, ds
Id 0

393 02/07/2002 08:00:22.280 SEV=9 IPSECDBG/1 RPT=23
Processing KEY_UPDATE msg!

394 02/07/2002 08:00:22.280 SEV=9 IPSECDBG/1 RPT=24
Update inbound SA addresses

395 02/07/2002 08:00:22.280 SEV=9 IPSECDBG/1 RPT=25
key_msghdr2secassoc(): Enter

396 02/07/2002 08:00:22.280 SEV=7 IPSECDBG/1 RPT=26
No USER filter configured

397 02/07/2002 08:00:22.280 SEV=9 IPSECDBG/1 RPT=27
KeyProcessUpdate: Enter

398 02/07/2002 08:00:22.280 SEV=8 IPSECDBG/1 RPT=28
KeyProcessUpdate: success

399 02/07/2002 08:00:22.280 SEV=8 IKEDBG/7 RPT=2
IKE got a KEY_ADD msg for SA: SPI = 0x285e6ed0

400 02/07/2002 08:00:22.280 SEV=8 IKEDBG/0 RPT=147
pitcher: rcv KEY_UPDATE, spi 0x5a724185

401 02/07/2002 08:00:22.280 SEV=4 IKE/120 RPT=130 172.18.124.241
Group [ipsecgroup] User [ipsecuser]
PHASE 2 COMPLETED (msgid=64c59a32)

[相关信息](#)

- [Cisco VPN 3000 系列集中器支持页](#)
- [Cisco VPN 3000 系列客户端支持页](#)
- [IPsec 协商/IKE 协议](#)
- [技术支持和文档 - Cisco Systems](#)